CHRIST -ORNOT?

© Barrie M. Schwortz




Scientists examine the Holy Shroud of Turin

AN ETI EXCLUSIVE

UHF TV converter project Electronic humidity meter Videodisc-how soon? Sony's TA-F80 hi-tech amp

AFTER 500 PLAYS OUR HIGH FIDELITY TAPE STILL DELIVERS HIGH FIDELITY.

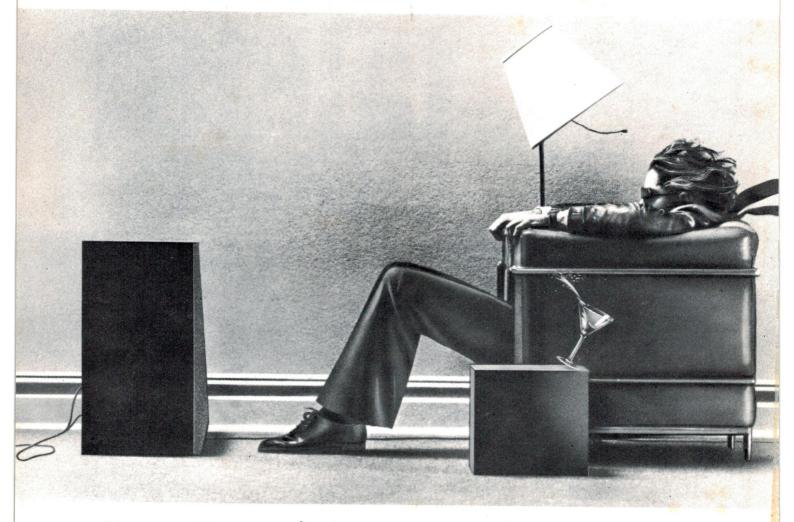

If your old favourites don't sound as good as they used to, the problem

could be your recording tape.
Some tapes show their age more than others. And when a tape ages prematurely, the music on it does too.

What can happen is, the oxide particles that are bound onto tape


loosen and fall off, taking some of your music with them.
At Maxell, we've developed a binding process that helps to prevent this. When oxide particles are bound onto our tape, they stay put. And so does your music.


So even after a Maxell recording is 500 plays old, you'll swear it's not a play over five.

HAGEMEYER

For further information on Maxell Tapes write to Maxell Advisory Service P.O. Box 307, North Ryde, N.S.W. 2113





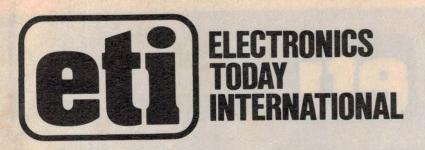

QUICK INDEX

FEATURES:

9 Chip Shop For Canberra?

14 The Holy Shroud of Turin

25 Scientists Examine the Holy Shroud

34 Solar Panels — Special Offer to ETI Readers

143 Fantastic Offer on Steel-backed Binders

COMPUTING TODAY:

83 Say it Again, RAM!

86 Printout - news and views

94 A Microcomputer for Beginners

101 Universal Logic

108 Wordsquare — A Game for the TRS80

112 PET talk

115 More POKEing on the ZX80

SIGHT & SOUND:

117 Software — Key to Videodisc

118 Sight & Sound News

129 Videodisc — waiting in the wings

122 Review of Sony's TA-F80 Amplifier

136 Dick Smith's P-360 Auto Turntable reviewed

PROJECTS & TECHNICAL:

35 735: UHF to VHF TV Converter

46 256: Electronic Humidity Meter

53 257: Universal Relay Driver Board

64 Lab Notes: Using the 555 & 7555

70 Ideas For Experimenters

77 Shoparound

BROADCASTING DILEMMA

IT IS APPARENT that television broadcasting in Australia has reached a crossroad — but it's no ordinary crossroad, it's a five-way junction! Television broadcasters, and listeners, have a number of options confronting them with regard to avenues for transmission and reception of programmes. These are: the existing 12-channel VHF system, a UHF system with over 35 channels available, direct satellite broadcasting, cable distribution or a 'mix' of these.

Cable TV is relatively remote, yet if any orderly mix of broadcasting avenues is to be looked at, it must clearly be a consideration. Satellite broadcasting, though, will be upon us later this decade, and that's not far away in planning terms. At present, UHF TV broadcasting is fulfilling an 'accessory' role. There is only one 'prime' broadcaster on UHF, the 'ethnic' station, channel 28, the others being translator services for existing VHF stations filling in where the VHF services cannot reach. The VHF system, introduced in 1956, amended in 1961, is currently in the process of being partially disassembled to make way for FM broadcasting.

The current disassembling of the old 12-channel VHF system by removal of channels 3, 4 and 5 to make way for the 88-108 MHz broadcast band has thrown the other options into high relief and this, coupled with the fact that channels 0 and 5A stations are to be phased out (see March issue, page 74 and this issue, page 81), has put enormous pressures on the existing TV broadcastors as an expectation.

The Federation of Australian Television Stations, representing the broadcasters as an 'industry', hosted a seminar in mid-March seeking ways out of their current dilemma, and we have a brief report of this on page 81. With direct satellite broadcasting fast approaching, the current broadcasters are seemingly caught between the devil — in the guise of channel reductions — and the deep blue sky! Although the satellite is suppose to provide services to those who cannot now receive them, many existing viewers could avail themselves of the opportunity. And they will.

While seeking solutions to existing problems, F.A.C.T.S. seeks to address themselves to the problems of an orderly introduction of UHF TV. But for the problems of VHF they seek solutions by proposing re-arrangements of the VHF channel allocations. It seems a short-sighted approach.

Meanwhile, the Department of Communications seems to have no really coherent attitude—let alone a policy. It came as shock news to those at the F.A.C.T.S. seminar that channel 5A was to be phased out — by direction from the Prime Minister. No time scale has been proposed, though. As I was composing this, I received a copy of a letter from the Minister of Communications, Ian Sinclair, sent to the Sydney Channel 0 Action Committee (see also March issue, page 74). Mr Sinclair says "... that while it is the 'Government's intention that multicultural television will eventually move to UHF only, I am not yet able to indicate when the channel 0 transmissions will cease."

At this time, the Department is also considering the Australian Table of Frequency Allocations following the WARC '79 recommendations, as well as a new Radiocommunication Act.

It is apparent that this is a critical time in the communications sphere in Australia, but especially in television broadcasting. The whole question requires some hard-nosed, dispassionate analysis in order to synthesise the appropriate solutions. And fairly soon.



Roger Harrison

Roger Harrison Editor

advertisers

Acoustic Foundry	
AED 98	
Applied Technology	
Archive Computer Services 55	
A&R Soanar	
Audio Engineers	
Aust. Govt Air Force 128, 144	
Aust. Govt. – Navy 6-7	
Best Vision (Channel King) 43	
Bose Australia 116 BWD Electronics 16	
Chadwick Audio	
Commodore Australia	
Computer Country	
Consolidated Marketing	
Dave Ryall Electronics	
David Reid Electronics.	
DeForest Software	
Dick Smith Electronics 20 44-45 50 53	
.61, 69, 78, 80, 82, 92, 100, 102, 104-105.	
Dindy Marketing 124	
Direct Computer Sales	
DSA Concert Systems	
Electrocraft	
Electronic Agencies	
Emac Industries	
Emona Enterprises	
Energy Control	
rerguson Transformers	
Freedman Electronics	
Hagemeyer – JVC	
Hagemeyer - Maxell	
Jaycar Pty. Ltd	
John F. Rose	
Kit Parts Australia	
Logic Shop	
Looky Video	
Magnetic Video (South Pacific)	
Marantz Australia	
Maurice Chapman	
McWilliams Wines 8	
Mensa Computers	
Mb Mail Order Service	
Micro 80	
Microtrix	
National Panasonic	
Pre-Pak Electronics	
hadio Despatch Service	
Radio Parts Group	
Radofin Electronics	
Sangui Flootrio Called	
Oftware Course	
sony	
candard Components (Hitachi) 141	
andy Electronics	
asman Electronics	
CI Micro Design	
SI Electronics 63 71	
Varburton Franki	




cientists examine the Holy Shroud of Turin

AN ETI EXCLUSIVE

UHF TV converter project Electronic humidity meter Videodisc-how soon? Sony's TA-F80 hi-tech amp

features



THE HOLY SHROUD OF TURIN

This piece of ancient linen containing the image of a crucified man believed by many to be Jesus Christ, has been the object of suspicion, curiosity and speculation ever since it appeared in Europe in the middle of the fourteenth century. Scientists, on the rare occasions they have been allowed to examine the Shroud, have been unable to state whether it is a fraud or not. We provide some background to the Shroud and its history, followed by Brian Dance's report on the first published results of the scientific investigations of 1978.

SCIENTISTS EXAMINE THE HOLY SHROUD

25

computing

COMPUTING TODAY

83

ETI "READERS' DREAM" COMPUTER

Say it again, RAM — and other stories.

94

If you'd like to make a start in the microprocessor field but don't know where or how to begin, this ETI Computer is for you!

UNIVERSAL LOGIC

Will we see the thousands of logic chips shrink to one small 'universal' set? If Dr Stanley Hurst of the University of Bath can translate his theories into practice a revolution in logic circuit design may well be sparked off.

WORDSQUARE _ A GAME FOR THE TRS80

112

Set up this game and keep the kids quiet while you compute!

PET TALK

Learn how to double the plotting capacity of your PET with this routine.

MORE POKEING ON THE ZX80

This month we continue our series on POKEing on the ZX80 with a graphics example.

news

NEWS DIGEST

Chip shop for Canberra?; BHP science prize; Turning on the aurorae; ABC tests Antiope, not Telidon: etc.


PRINTOUT

New ZX81; Bubble cassettes; Super Text II for Apples; New address for Sorcerers; etc.

COMMUNICATIONS NEWS


F.A.C.T.S. seminar; 500 MHz quartz crystals; etc.

projects



735: UHF TV CONVERTER

This project should satisfy the deluge of people who wrote in asking us for a project to convert UHF signals for reception on a VHF TV. It's in two versions — single channel and tuneable — and is designed and constructed very simply.



256: HUMIDITY METER

This project will give a readout of relative humidity either on a LED dot-mode display or a conventional meter. It can be used with ETI-257 as a controller to turn on and off a water mist spray in a hothouse, for example

257: UNIVERSAL RELAY DRIVER 53

This should turn you on — or off! A simple circuit that can be coupled to many electronic devices to operate a relay that can switch on or off an external circuit, perhaps mains operated or whatever. Features include facility to AND or OR two inputs, logic high to operate, logic low to operate and latch/unlatch inputs.

LAB NOTES 64
Gate, square, sine, modulate — with the 555 and

7555. 70 FVDERIMENTERS 70


IDEAS FOR EXPERIMENTERS 70
Simple anemometer; Remote control with UARTS;

SHOPAROUND

sight& sound

SIGHT AND SOUND NEWS 117

Software the key to the videodisc war; Sanyo's new Beta video cassette recorders; New series TDK reel-to-reel tapes; etc.



SONY TA-F80 AMPLIFIER

122

Louis Challis didn't care much for the look of the Sony TA-F80 amp, but in every other way he has nothing but praise for it.

VIDEODISC — WAITING IN THE WINGS

129

The battle lines have been drawn, the software is being sorted out, and World War III (for the domestic videodisc market) appears to be commencing. This article reviews the three main contenders.

DICK SMITH P-360 TURNTABLE 136

Louis Challis found the P-360 turntable to be really good value for money, needing only a first-class cartridge to bring out its full potential.

general



ELECTRONICS BOOKS FROM ETI 58

Regionars' books, data books, circuit books, etc.

beginners books, data books, on our	
LETTERS	79
SHORT CIRCUITS Simple LED VU meter	134
MINI-MART	142
SUPERB BINDERS FROM ETI	143
ETI SERVICES	145
DREGS	146

next month



TECHNICS' SB10 LOUDSPEAKERS

We first introduced readers to Technics' revolutionary 'Honeycomb Disc' drivers, and the SB range of speakers, back in the May '80 issue and we have been hankering for some time to review the SB10s. What surprises will Louis Challis' spectral decay analysis have in store?

ELECTROSTATIC DISCHARGE

The nemesis of electronic systems — examined in depth! Most readers are familiar with the care one usually has to take with CMOS circuitry, but there's a whole lot more behind and beyond that. Our article examines how electrostatic charges can be built up and how to protect against the damage they can wreak

SERIES 5000 PREAMP/CONTROL UNIT

Second in our series of 'no-compromise' audio units. David Tilbrook explains the philosophy and circuit techniques behind this top-line project. Features include a moving-coil cartridge preamp along with two moving-magnet preamps, a very versatile tape monitor scheme and a unique LED level meter that simultaneously displays peak and average programme level. Construction commences with the latter unit, which can also be used as a stand-alone instrument or incorporated in other equipment.


A MICROCOMPUTER FOR BEGINNERS

As explained this month, construction starts in the June issue. Featuring simple, single-board construction, low cost and expandability, this versatile little unit can be powered from a plugpack, will plug directly into your TV set for video display (colour tool), and includes an audio output.

ADVANCED BASIC - PART 1

For those personal computing buffs who've got beyond the basic BASIC. This series follows on from Phil Cohen's popular 'Back Door Into BASIC' series. If you've worked your way through that and itch to go further — Advanced BASIC's for you!

Although these articles are in an advanced state of preparation, circumstances may affect the final content. However, we will make every attempt to include all features mentioned here.

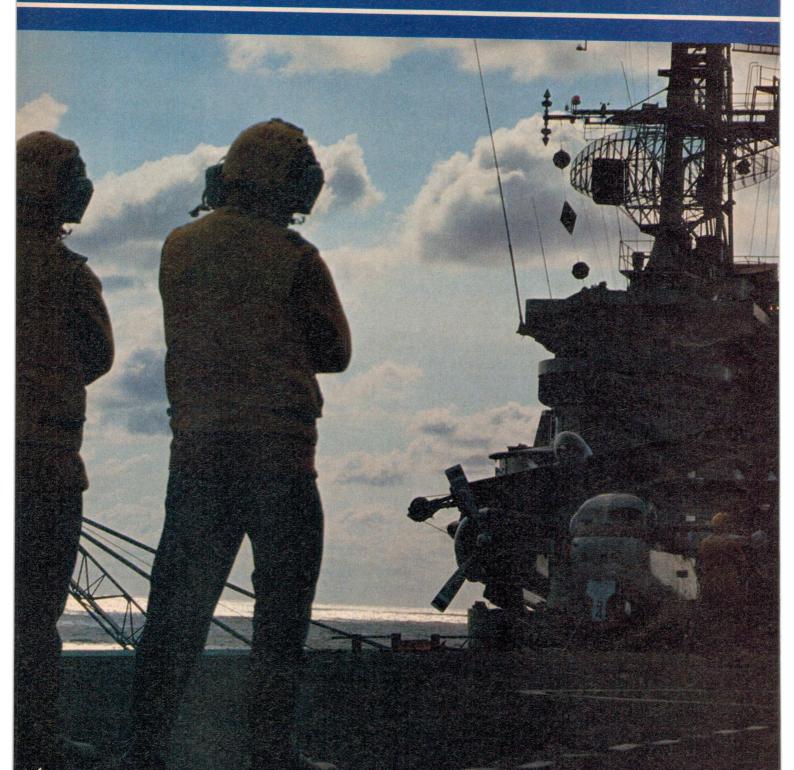

YOU'LL BE VVET, YOU'LL BE AND FRIGHTENED, BUT KNOW THAT YOU'VE GOT

THE PRIDE OF THE FLEET IS YOU.

In the days when our Navy was young, and the ship was the pride of the fleet.

You'd gaze out at her in wonder, made an old sailor's heart skip a beat.

Well the ships have gone through some changes,

And the roles have changed a bit too.

You'll be wet,

You'll be homesick and frightened, But the pride of the fleet will be you.

Our ships are equipped with some of the finest and most advanced technology in the world. So it stands to reason that we're proud of them.

It also stands to reason that we need the men to make them work.

Men who, in the Navy, have discovered what they do best and have been trained to achieve it.

Men with pride in themselves and what they can do. Whatever the conditions.

Because pride is what it's all

about really.


In the Navy we're proud of the Fleet. But we're prouder still of the men who work it.

Talk to a Navy Careers Counsellor. He'll tell you about today's Navy and the kind of men that it needs. It could be a proud moment for you both. So, pick up a phone now. Or write to G.P.O. Box XYZ in your state capital.

N.S.W.: Sydney 212 1011, Parramatta 635 1511, Newcastle 2 5476, 226 2626, Townsville 715253. S.A.: Adelaide 2121455. W.A.: Perth 325 6222. TAS.: Hobart 34 7077, Launceston 31 4626.

Wollongong 28 6492. VIC.: Melbourne 613731. QLD.: Brisbane A.C.T.: Canberra 82 2333. Auth. Director-General Recruiting, Dept. Defence. NGE249.DPS.21



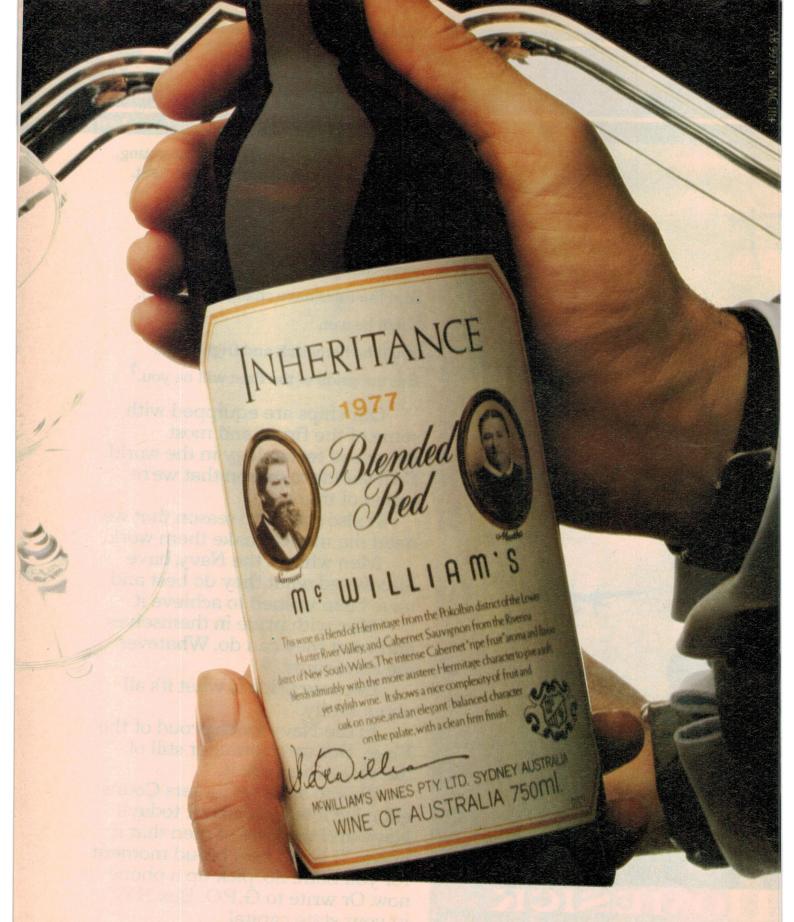

UPON RECEIVING YOUR INHERITANCE IT'S ALWAYS WISE TO STUDY THE FINE PRINT CAREFULLY.

MEMS digest

Chip shop for Canberra?

The Federal Government has invited National Semiconductor to examine the feasibility of establish-

Minister for Industry and tending Commerce. politicians.

Natsemi would commit itself to which have yet to be added up. the transfer of existing and technology, future favoured customer' access to offered to Natsemi: assistance products. product development and the grants. training of Australians.

Mr Hodgman said that Natsemi would employ 1200 • Investment allowance tax people in operating the plant, write-offs. and at least a further 800 jobs would be created by demands associated with the new industry. Construction of the plant would employ 300 people over 18 months.

'Capital cost of the project is estimated at \$100 million and would involve the construction of an 18600 square metre plant, a central servicing unit, and office space," the Minister said.

decision on whether the project for them. will proceed at that time. However, Mr Jack Rutherford, accuracy just what the money Managing Director of Natsemi value of the industry incentives Australia, was in no doubt that will be since there are as yet no he would get his board's publicly available figures on the approval. Natsemi's head office likely value of output, the in Santa Clara, California's number of the 1500 staff who with the proposal.

ment, some observers were Taxation Commissioner to an

Announced in the fourth wondering why Natsemi had week of March by the Mini- chosen Canberra after it had ster for the Capital Territory apparently had counter offers and Minister Assisting the from a range of other conoffering countries Mr Michael millions of dollars worth of Hodgman, the news brought concessions. It appears, howsome criticism from South ever, that the answer is quite Australian and Queensland simple. Australia offers undoubted advantages in the way Mr Hodgman said the Aus- of a stable political climate, tralian Government had indi- sound investment environment cated its willingness to seek an and a growth economy. But the agreement with Natsemi on the concessions offered are not that basis that it would provide land different from those offered elseand buildings (estimated to cost where. Behind the \$19.5 million \$19 million), in return for which offer lie a string of entitlements

It appears that the following 'most forms of assistance have been

- with Research and development
 - Export expansion grants.

 - · The opportunity to apply to the Tax Commissioner for special depreciation write-offs to apply to the economic life (as opposed to the physical life) of the plant, and
 - Training allowances for staff employed.

While local firms can get complex housing a fabrication similar assistance, the difference between Natsemi and local firms is that while these forms of assistance are available Natsemi expects to complete to the latter, they rarely get a their feasibility study around the head-start by Government promiddle of the year and have a viding free land and buildings

It is difficult to assess with any famed Silicon Valley, is familiar will receive specialist training, the planned investment in plant Following the announce- or the likely response of the

ing a silicon wafer fabrication plant in the Australian Capital Territory.

application for accelerated depreciation rates.

What has been causing concern within the Public Service, however, are the equally vague indications of what Australia will receive in return.

Natsemi has yet to inform the Government exactly what kind of chips it will manufacture, and there seems to be very little pressure from the plant's enthusiasts (of whom there are plenty) for them to do so.

However, the entire utility of the scheme depends almost totally on the technology transfer benefits which its advocates say will accrue to Australian manufacturers.

One Canberra source deeply involved in the project said recently that Natsemi had given an undertaking that the plant will involve VLSI (very large scale integration) technology but has not committed itself to details such as whether bipolar or MOS modes will be employed.

Natsemi has apparently told the Government that this decision will be made later, after world market requirements are assessed.

Nor is it clear how much, if any, capital Natsemi itself will outlay, although it has been promised loan-raising assistfrom the Australian Industry Development Corporation (AIDC) should it require it.

Australian firms will be required to buy the plant equipment and lease it to Natsemi and presumably the leasing fees will be tax deductible.

It has perhaps not been appreciated that the Natsemi plant will be merely an off-shore operation for the Silicon Valley major operation of the corporation. It will fabricate silicon wafers for export only and has no obligation to manufacture for the local market.

The 'encapsulation stage' of

the silicon chip production process — where the chips are separated from the wafers will take place in low-wage, tax-free Singapore.

The aspects of the deal which excite its promoters so much are the two concessions Natsemi has offered.

One is the status of 'prime customer priority' for Australian manufacturers wanting to buy other Natsemi components (which will be able to be purchased from a central clearing house to be established by Natsemi).

The second concession will be the establishment of a technology exchange corporation (which will be operated on a 50/50 basis by Natsemi and Australia) whereby Australian manufacturers can acquire advice, for a fee, on re-design and new design of microcircuitry existing to applications products.

The Queensland Treasurer, Dr Llew Edwards, has attacked the Government's decision to site the plant in Canberra and criticised the assistance, saying it was two-faced for a Federal Government which has attacked State Government incentives to new high technology industries such as aluminium smelters to do the same thing. Such criticism is predictable, yet the proposal succeeded despite intense bureaucratic opposition, it seems.

It's not likely to gladden the hearts of Philips' Australian board, or AWA for that matter. Philips closed down their Hendon, S.A., plant around a year ago and AWA is struggling to find customers for their custom chip design facility.

It will be interesting to see what happens in a few short months when Natsemi come back with their feasibility study results.

EMS digest



New range of Yew multimeters

The Yew 2410 series of multimeters, just released by Parameters Pty Ltd, is intended for professional use in maintenance, test and service situations.

All feature taut-band suspension, a technique pioneered by Yew and used in many of their instruments. Other features include a common ac and dc scale with white lettering on a black background to emphasise the position of the pointer.

In all, five different models are available. Movements are diode protected with additional fuse protection against overloading. Scales are colour-coded with the selector switch to simplify readings, and a single switch is used for all range and function changing.

Cases are made in tough high-impact plastic, and a vinyl carrying case is supplied as standard.

A detailed colour brochure on the Yew 2410 series of multimeters is available from Parameters Pty Ltd — phone Sydney (02)439-3288 or Melbourne (03)90-7444.

Now it's microprocessor 'phones!

It had to come — the microprocessor telephone. But this latest electronic wonder is not just a telephone with memory, auto-dialler, etc — it's the complete bedside companion!

a stopwatch, a calculator, a digi- and dialled automatically. tal clock and an alarm clock. And it's Telecom approved, according to Supertel.

The memory dialler enables you to store the 20 numbers you call most frequently - each number can be up to 14 digits long (ISD!). The number you select is displayed on the 14-digit LED display as Superphone dials it.

The auto-redialler stores the or recalled it from the memory. (02)81-3007.

The Superphone 7700, just All you do is pick up the receiver, released here by Supertel Aus- press the 'redial' button and the tralia, features an auto-redialler, last number called is displayed

> In addition, the Superphone includes a stopwatch so you can time calls up to 99 mins 59 secs; a four-function, eightdigit calculator; a crystalcontrolled digital clock and an alarm operated by the clock. Just to make sure the phone operates during power failures, standby batteries are included.

Full information can be oblast number you dialled, tained from Supertel, P.O. Box whether you dialled it manually 215, Rose Bay 2029 NSW.

Turning on the aurorae

Experiments conducted by Canada's National Research Council Herzberg Institute of Astrophysics in the upper atmosphere have exceeded all expectations.

Their 'Waterhole' project in- magnetic flux measurements in volved seeding the Earth's ionosphere with water molepossible.

The seeding was done instantly with a high explosive rocket warhead which caused a dimming of the aurora by some 50% throughout the area scanned by rocket-borne and by ground-based instruments.

This temporary intervention in the high-atmosphere prowhich create Northern Lights also produced Southern hemisphere. perturbations in the particle and

the area.

If these first results are concules at a height of about firmed by similar future rocket 300 km over as wide an area as experiments, then the National Research Council of Canada's researchers will be sure they have somehow influenced the high speed particles that induce the aurora.

They forecast that it may even be possible at some future date to dim or brighten the aurora or even turn the lights on and off again at will.

The same would apply in the

Brian Dance



New range of panel meters features taut-band suspension

A new range of English-made SIFAM meters has recently been released by C & K Electronics.

sion, the SIFAM meters are names or logos can be printed available as dc or ac voltmeters, on dials to order. Illumination is millivoltmeters, ammeters, milliammeters and microammeters. Some models are available for special requirements such as dB meters or temperature indicators.

Apart from the standard pointers and scales fitted to the meters, many other types of pointers are available and scale markings (including colour printings) can be provided to suit individual requirements. Mirror scales and meters with centre or right-hand zero can (02)682-3144.

Featuring taut-band suspen- also be supplied. Customers' available, if required, on most

VU meters and peak programme meters are generally to the relevant available specifications. A special low cost audio level indicator with VU scale is available with modified ballistics.

For further information, including a very informative catalogue, contact C & K Electronics (Aust.), P.O. Box 101, Merrylands, NSW

Science prize for students

The first BHP Science Prize, to be awarded in May 1982, is being wholeheartedly backed by both the CSIRO and the Australian Science Teachers' Association.

are biology, chemistry, geology, medal. physics, or a combination of these, and students are eligible if they are under 19 on Jan 1 1981 and attending a registered Australian primary or secondary school or secondary college during 1981, either full or parttime.

is \$1000 and a silver medal, in each state.

Areas of scientific research third prize \$500 and a bronze

According to the CSIRO, the aim of the competition is to 'encourage young scientists in the pursuit of excellence in the biological and physical

Entry forms may be obtained The winner will receive \$5000 from members of the Australian plus a gold medal; second prize Science Teachers' Association

Low-cost Japanese multimeters

GFS Electronic Imports of Mitcham, Victoria, recently announced they would soon have available two handheld digital multimeters manufactured by the well-established Japanese electronics instrument maker, Soar Corporation.

The ME-501 and ME-503 are both 31/2-digit DMMs with liquid crystal displays. They employ LSI solid state technique and are consequently highly durable, with a battery life of up to 200 hours, according to GFS. Low battery and automatic polarity indication are provided for in their displays, all ranges are fully overload protected, and zero adjustment is automatic.

The ME-503 (photographed) reads ac and dc voltage up to 1000 V, and ac and dc current up to 10 A, as well as resistance. Input impedance on the ac and dc voltage ranges is 10 megaohms. The ME-501 is similar except for having only two ac voltage ranges, 200 V and 1000 V.

The expected selling prices are \$135 + sales tax for the ME-503 and \$99 + sales tax for the MF-501.

For further information con- 3132. tact GFS Electronic Imports, AA38053 GFS.



15 McKeon Rd, Mitcham Vic. (03)873-3939;

Heathkit earth station?

American sources advise us to look for Heath to add a low-cost satellite earth station kit to its Heathkit line of build-it-yourself electronic products.

gan, subsidiary of Zenith Radio product by late this year or early Corp. is eyeing the market for 1982. Early speculation is that it direct satellite TV viewing at will sell for less than US\$10 000.

The Benton Harbor, Michi- home and could be ready with a

People, products and appointments

Soanar Electronics have been appointed as sole Australian and New Zealand agents for Supertex Inc. of the USA. Supertex manufacture a wide range of N-Channel and P-Channel VMOS power FETs specially designed for applications requiring high input impedance and fast switching time, and programmable encoder/decoders for CMOS PROMs.

Mr James Donnelly has been appointed national manager, technical services, of Bell & Howell Australia Pty Ltd. He will be directly responsible to Bell & Howell Australia's general manager, operations, Mr John Londregan. A graduate of the RMIT in industrial electronics, Mr Donnelly has also taken a post-graduate course in electronics at the Gordon Institute of Technology and gained his certificate from the School of Small Business Studies. Prior to joining Bell & Howell, he was an executive of A-M International for 21 years.

David Christopher, former managing director of Tandy Electronics in Australia, has been named vice president of Tandy International Electronics, a new position. He will head retail operations in Australia, Belgium, Canada, France, Germany, Holland, Japan and the United Kingdom.

BWD Instruments, who have 25 years of experience in the electronics field behind them, are approaching the 1980s with a new, vigorous management team headed by John Opie and Ron Wheeldon as joint managing directors. BWD won the Design Award of the Australian Industrial Design Council for their 880 Powerscope, and are at present trying to enter the American and Japanese markets to consolidate their success in the southern hemisphere. Philip Cohen as newly created Corporate Development and Marketing Manager will be responsible for the marketing effort and increased production.

Tecnico Electronics have been appointed Australian distributors for Tekel handheld digital tachometers for rotational or peripheral speed measurement. Two models are available - a mechanical contact type and a non-contact infrared device.

In March this year the A & R Soanar Electronics Group opened their Queensland branch and warehouse complex in Brisbane. The Group now has branches in all mainland states of Australia, and like the other branches the new Queensland setup provides field representation, a showroom, telephone sales and warehouse facilities.

Dick Smith Electronics Pty Ltd plans to open a sales office in Auckland, New Zealand, early this year. Dick Smith visited New Zealand in 1980 to gauge prospects, and was swamped by calls and letters from the public there wanting to know when Dick Smith Electronics would open in New Zealand. Initially the NZ branch will concentrate on distributing a selected range of Dick Smith products to NZ resellers, but a retail outlet should follow shortly. Dick Smith Electronics hope to gain skills and experience in this New Zealand venture which will enable them to achieve their ultimate goal of opening in the US by 1984. Mr David Milson, a Dick Smith company executive with many years of experience in Australia, will become the resident manager of the New Zealand operation until he has trained a New Zealander to take over the position.

Dick Smith Electronics also recently opened a new store at 145 Parramatta Road, Auburn (phone 648-0558), to serve Sydney's Western Suburbs. The store will be open seven days a week and has plenty of parking available. Manager will be Ilidio Teixeira, formerly manager of Dick Smith's Parramatta store.

A rather obvious, but potentially dangerous error occurred in the circuit on the top left of page 60 ('Power Monitor') in the March issue. It shows the mains active input connected to the earth at the output. The mains active input should instead go to the fuse. Correct your copy now. Correction slips were inserted in the majority of copies distributed.

NEWS digest


AAAARRRGH!

Every now and then, it's the little things in life that get to you. This month (or last month, really) it was the picture on page 38 of the April issue, showing the pc board for the ETI-567 Core-Balance Relay. Just in case you hadn't noticed, look carefully and you'll see the writing on the potcore and the transformer is laterally reversed. In the trade (as they say . . .) this is known as a "flopped pic". Sometimes we'd like to do the same thing to the person responsible. Here it is (hopefully, this time . . .) the right way round.

That wasn't the only thing the wrong way round. The two red wires from T2 (L1) are shown incorrectly on the overlay, page 39, and the picture. Transpose them for correct operation. The picture at right is correct. The How It Works is correct, but the dot on the top wire of L1 on the circuit should go on the lower wire.

ERRATA, page 17, April

The caption beneath the chart at the top right of page 17 contains an error. The fourth line should . balanced positive-to-negative ion ratio of 1.2:1.0 . .

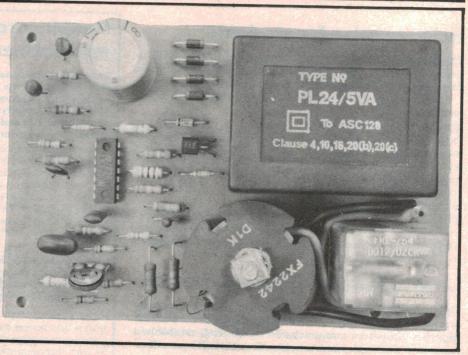

Telidon given world standard rating — but the ABC does different

The plenary assembly of the International Telegraph and Telephone Consultative Committee (CCITT) ratified in December 1980 the Canadian videotex (two-way TV)

adopted country.

photographic form.

to virtually any computerised has such as electronic mail, tele- videotex market. shopping, telebanking and home video games.

representatives strated in Australia in August displayed Telidon in Australia in 1979, but since that time has February this year with a view to made many advances, both their system the technologically and in distristandard in this bution. As well as having been approved as an international Telidon can be used at home, standard, Telidon systems have in business and in education, been sold for use in Washington and according to its developers in the USA and Caracas, Veneis a highly flexible, efficient and zuela; a Telidon demonstration easy to use system that adapts system is fully operational in easily to many uses and trans- Switzerland; Telidon technology mission methods, as well as is an integral part of new cable having been designed to be TV networks proposed in immune to technological obso- several US cities; and major lescence. Information can be home computer firms in North displayed in textual, graphic or America are designing equipment and software that will It can provide access to the allow more than one million data banks of libraries, stock ex- home computers in the US to changes, newspapers, weather take advantage of Telidon's data offices, advertising directories, storage and image creation government agencies — in fact technology. Teleglobe Canada also announced information system. As an in- C\$4.1 million project to estabteractive computer system, lish a 100 000-page Telidon Telidon can be used for services data base for the international

Within Canada hundreds of terminals have already been Telidon was first demon- installed across the country, and system, Telidon, as one of the world standards, alongside competing French and British systems.

dozens of companies are involved in Telidon projects. Telidon information is being transmitted by satellite, TV broadcast, telephone lines, coaxial cable and optical fibre. The cost of Telidon sets is declining as demand increases.

The Canadian developers rebe the videotex standard for Australia because they say it was developed with the broadest possible range of applications in mind, is immune to technological obsolescence, and each piece of equipment can be used for many different functions.

However, despite all this heavy propaganda for the Canadian product, the ABC has decided to go its own way and start field trials of the competing French system, Antiope.

Some Australian TV channels have already been testing the British Teletext system, but since this system was designed for use with UHF TV channels it is unlikely to be the most appropriate for the ABC, which largely uses low-numbered channels. Using the British system on Channel 2, tests have shown that the data may be easily distorted in its passage from the transmitter to the TV set, causing a high probability of errors or omissions.

With the French Antiope gard Telidon as ideally suited to system, rows of alphabetical characters and other data are transmitted without the need to synchronise them with the TV line structure, as must happen with the UK Teletext. Antiope displays 40 characters on each row of the 'page' as does Teletext, but the French system allows reduction in the speed of transmission to minimise the number of errors — a vital consideration in such things as stock exchange listings, where an error in a single digit could be vital. If the ABC's field trials of Antiope are a success, it will recommend that the French system be given careful consideration by the Department of Communications for adoption



Music, Murder, Money and Mirth

With these exciting new movie releases from Magnetic Video. Reprinted on top quality videotape. Slot in the video cassette, switch on and settle down to a night of uncensored entertainment.

Beyond the Valley of the Dolls. An all-girl rock trio and their manager meet bizarre characters, and murder in Hollywood. Stars the voluptuous Edy Williams, Dolly Reed and Cynthia Myers. Myra Breckenridge. The story of a young homosexual man who undergoes a trans-sexual operation. Stars Rex Reed and Raquel Welch. Julia. Academy Award winner, set in the turmoil of World War II and Nazi Germany. A young writer is asked to smuggle money into Berlin. Stars Jane Fonda and Vanessa Redgrave. Breaking Away. Comedy about an illusive high school graduate's addiction to bicycle racing. Stars Dennis Christopher, Dennis Quaid and Daniel Stern. There's No Business Like Show Business. Irving Berlin's classic musical comedy about a 'show biz' family. Stars Marilyn Monroe, Ethel Merman and Johnny Ray.

Plus a star spangled list of titles already in the world wide library.

Buy your Magnetic Video cassettes from these selected retailers:
VICTORIA: Intercape Video Recorder Centre, Natsound Pty. Ltd., Douglas HiFi, Batman Book Club, Brashs/Allans Music Stores
-Melbourne. John Bruce Market Place—St. Kilda, Canberra Television Services—Camberwell, Dandy Sound, Gleeson &
-Melbourne. John Bruce Market Place—St. Kilda, Canberra Television Services—Camberwell, Dandy Sound, Gleeson &
-Melbourne. John Bruce Market Place—St. Kilda, Canberra Television Services—Pty. Ltd.—East Malvern,
Tonta—Dandenong, Maxwells—All Stores, Myer—City, Suburbs and Country Stores, Pal TV & Stereo Pty. Ltd.—East Malvern,
Drotobin—Seaford, Reilly Bishop Pty. Ltd.—Blackburn, Video Sound—Mildura, Hollywood & Vine—South Yarra. Compucolour
Photobin—Seaford, Reilly Bishop Pty. Ltd.—Blackburn, Video Sound—Mildura, Hollywood & Vine—South Yarba
-Compucolour
Photobin—Seaford, Reilly Bishop Pty. Ltd.—Blackburn, Video Sound—Mildura, Hollywood & Vine—South McDougall
TV Rentals Pty. Ltd., Myer Ltd.—Hobart, Wills & Co. Pty. Ltd., Launceston Video Centre, Video Home Systems, Sound Centre—
Loughran & Sons Pty. Ltd.—Boart, Wills & Co. Pty. Ltd., Launceston Video Home Systems, Sound Centre,
Chandlers—Brisbane Selected Stores—Brisbane Selected Stores—Brisbane Selected Stores—Brisbane Selected Stores—Brisbane Sound Centre—Mt. Isa, Canberra
Saunders Electronics Pty. Ltd.—Longreach, Stereo World—Cairns, Virits Electrical & Sound Centre—Mt. Isa, Canberra
Saunders Electronics Pty. Ltd.—Bushame, Sound Phy. Ltd.—Wollongong, Geoffrey Button Pty.
Homemakers Division, Waltons—All Stores, Hi Fi House, L. & B Television Service Pty. Ltd.—Wollongong, Geoffrey Button Pty.
Homemakers Division, Waltons—All Stores, Hi Fi House, L. & B Television Service Pty. Ltd.—Wollongong, Geoffrey Button Pty.
Homemakers Division, Waltons—All Stores, Hi Fi House, L. & B Television Services—All Stores, Fred Cole Pty. Ltd.—
Hi Fi Centre Pty. Ltd.—Newcastle West, Cuban Radio—Broken Hill, Electronic Enterprises—All Stores, Fred Cole Pty. Ltd.—
Hi Fi Centre Pty. Ltd.—Ne

	Magne Twentieth Ce	etic Vi	deo
Write to M 100 Miller colour, co	A Twentieth Ce agnetic Video (Sc Street, North Syc apprehensive Mag obligation free.	outh Pacific), Nor	th Point, free full
Name: _			
Address:			
		Postcode_	
		150 1500	MAGO

The Holy Shroud of Turin

Since its mysterious appearance in the fourteenth century, the piece of linen cloth with the strange image of a crucified man, now known as the Holy Shroud of Turin, has elicited awe, disbelief, scepticism, and scientific curiosity. Its history and its authenticity are, as one scientific punster put it, "shrouded in mystery". This article fills in some background on the Shroud, including its known and conjectured history and the conclusions — or lack of them — of scientific investigations up to the latest scientific enquiry of 1978.

THE HOLY SHROUD of Turin is kept, well wrapped in silk, asbestos and lead, in the Royal Chapel of Turin's Cathedral of St. John the Baptist, which has been its home since 1578. Officially the property of the House of Savoy, former rulers of Italy, the Shroud has for centuries been equally jealously guarded by the Catholic Church, who have seldom allowed it to be viewed by the general public and have consistently shown resistance to scientific examination which might prove, once and for all, whether the Shroud is at least authentically from the time of Christ or whether it could be the work of a mediaeval forger. Even on its first

appearance in the West in the fourteenth century there were doubters of its authenticity, notably Bishop Henry of Poitiers around the middle of the century, and some years later the Bishop of Troyes, Pierre d'Arcis, both of whom tried to stop the exposition of the Shroud on the grounds that it was not genuine.

This cloth that has caused so much controversy is a piece of linen a little over 14 feet long and about a yard wide — in excellent condition considering its supposed age — which bears on it an image, formed by some unknown means, of a crucified man. The man

Jane Clarke (B.A. Hons) — Production Editor, ETI Group


appears to have been laid on his back on the cloth, which was then folded over his head to cover his front, since there is a complete image of both the front and back of the body.

The colour of the imprint is best described as a sepia monochrome with variations in the intensity of the colour, but there is no clear outline of the body; the impression is rather of a blurry, almost impressionistic figure, which melts away into insubstantiality as one comes closer to it.

The man of the image was about 181 cm (5ft 11in)—tall for his supposed time, but not impossibly so — with a powerful and well-proportioned

© 1978 Barrie M. Schwortz

Photographs of the frontal and dorsal images on the Shroud taken with reflected light. This is how the Shroud appears under normal viewing con-

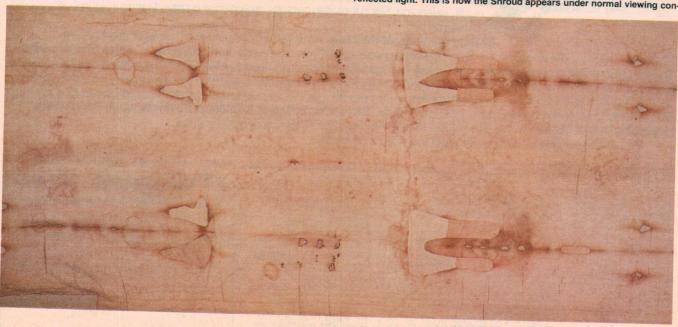

physique. A leading ethnologist has described him as "of a physical type found in modern times among Sephardic Jews and noble Arabs", and his age has been estimated as between 30 and 45. There is a good deal of evidence that this man was a crucifixion victim, and there are also traces of what could be taken to be blood spilled due to the Crown of Thorns, the scourging, etc. that Christ is said to have undergone.

There is no definite evidence in the Gospels that Christ would leave a 'sign' like this Shroud of his resurrection; mention is made of the disciples finding 'othonia' (linen bands used to bind the body according to Jewish ritual) and a 'soudarion' (sweat cloth) in the tomb, but these cannot be specifically tied in with the Shroud, as there is no mention of any image left on them. Many people, however, have discovered in the Shroud details which correspond closely to the description in the Gospels of what Christ underwent before death, and most of these people would welcome a comprehensive scientific examination of the Shroud in order to at least discover whether this apparent miracle could in fact be man-made.

Scientific investigation

True scientific investigation of the Shroud really only started in 1898, when Secondo Pia used the new science of photography to take pictures of the Shroud — and discovered that the image was a negative one. Instead of the masklike, ghostly appearance of the Shroud, the man stood out on photographic negatives as a positive, lifelike image — especially the face. This discovery alone makes the likelihood of the

Shroud's being an artist's forgery much more remote; it would be practically impossible for any artist to reproduce tones that are the reverse of all he has learnt to depict in nature, especially without the photographic means of checking his work. Besides, who would want to produce artificially such a negative image?

Medical men have also shown a good deal of interest in the Shroud. They claim that the anatomical data of the image would be far beyond the capabilities of any fourteenth century artist, judging from what contemporary works show us of the prevailing knowledge of anatomy. They also deduced from experiments that a crucifixion victim would have to be nailed through the wrists, as is the man of the Shroud, since the palm of the hand would not be strong enough to bear the weight of the body. Subsequent discovery of a crucified man proved them to be right — but would a mediaeval forger have known this, considering that all contemporary portrayals of the Crucifixion show nails through the hands?

Angles of blood flow also indicate crucifixion, and markings on the forehead and in the side would correspond exactly with wounds Christ is said to have received.

In tests done before 1978, no trace of pigments has been discovered, as would be expected if the Shroud were the work of an artist. As well, it has been discovered that whatever caused the image has not penetrated right through the fibre of the linen, nor has it encrusted between the fibres. This would also seem to rule out paint, or any kind of 'wet' process of image-formation.

Analysis has been made of the weaving of the linen to try and trace its origins. Whilst the style - a three-toone herringbone twill - is unusual in linen, it is by no means unique, and could certainly come from first-century Palestine. Whilst the linen was being examined, minute traces of cotton were also found, suggesting that the linen had been woven on equipment also used for the weaving of cotton. By analysing the species of cotton, scientists determined that it originated from the Middle Eastern area. Whilst a forger might have gone to the length of obtaining a piece of linen from this precise area, it is one more piece of evidence pointing towards the authenticity of the Shroud's provenance.


Up till 1978 scientists had been unable to identify any actual blood on the Shroud; it has been conjectured that either the age of the cloth or the fire and water damage it sustained in the sixteenth century might account for this, but since there is in any case no sign of penetration of any liquid into the cloth, it is arguable that scientists might perhaps not expect to find traces of actual blood.

The Shroud was also subjected to pollen-testing by means of removing surface particles from it on pieces of sticky tape. Dr. Max Frei of Switzerland in this way determined four predominant areas where the Shroud had been in its history: near to the Dead Sea in Palestine; in the area of the Anatolian steppe; Istanbul; and Northern Europe. The latter corresponds to our knowledge of the Shroud's history, but the other areas could offer vital clues to

its earlier existence.

ditions. Shroud is mounted on a specially constructed stainless steel table and held in place with magnets to avoid damage to the cloth.

© 1978 Barrie M. Schwortz

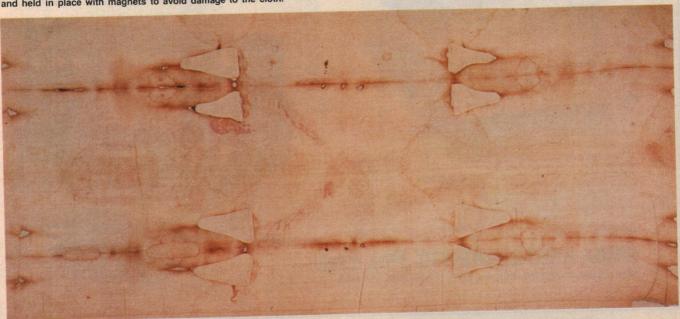

We're viewing the 80's on a greater scope.

BWD have combined the expertise of highly qualified personnel with a dynamic management team to forge ahead stronger than ever before. The strength of our future is reflected in the ever increasing demand for our high quality instruments. A policy of continuous development assures a constant output of original and innovative designs for both ceneral and specialised needs. general and specialised needs.

BWD manufacture first class instruments, widely accepted for their simple, functional designs that can out-perform far more complex competitive products.

In the fields of research, design, education and servicing, BWD provide a wide range of instruments from pure electronics to power line systems... and this range will be rapidly expanded throughout the 80's.

- BWD 880 POWERSCOPE. 4 Independent differential channels for measurement of phase, voltage and current, across non-isolated power line equipment.
 BWD 845. Variable persistence storage dual trace, delayed sweep oscilloscope. 30MHz bandwidth, 1mV/div sensitivity with 11cm, 25cc writing speed, auto erase and store. Mains or battery operation.
- BWD 820. Versatile portable oscilloscope. Dual trace or differential 25MHz bandwidth. 2mV/div sensitivity DC coupled X-Y-Z operation.
- BWD 6038 "MINI-LAB". A portable laboratory instrument combining 5 power supplies. 2 amplifiers, a wide range function generator and sweep ramp in a single unit. A range of power supplies with fully adjustable outputs up to 72 Volfs 5 Amps and 18 Volfs 12 Amps. BWD 804 single beam, with isolated ground, 10MHz oscilloscope. Internal or External trigger with auto or level select. BWD 540 portable dual trace 100MHz oscilloscope. Sml/div sensitivity with delayed trigger or sweep. Mains or battery operation.







Miles Street, Mulgrave, Victoria, 3170. Phone (03) 561 2888

[*STRING ENSEMBLE]

Due to unprecedented demand we now have new stocks of this fantastic synthesiser.

This complete kit includes professional Italian made 49-note keyboard, all timber cabinetry, and all components needed — down to the last nut and bolt.

It comes complete with a comprehensive 35-page instruction and assembly manual!

Anyone considering the purchase of a string synthesiser would be mad not to check this out.

This is the fabulous English designed unit capable of synthesising:

And the price for all this wizardry? just plus \$10.00 shipped anywhere in Australia.

- String section of orchestra (i.e. a chorus)
- Single stringed instruments
- Brass, e.g. Trumpet sounds
- Woodwind, e.g. Clarinet
- Organ
- Piano Accordion
- Even a "Mighty Wurlitzer" effect!
- Plus several combinations of above!!

SHOWBAG SELLOUT

What can we say but "Thanks"

As you know, last April we advertised our goodies for enthusiasts. Well, the demand was fantastic as well as the complimentary comments about our brand new store layout. If you have not visited as yet why not do so soon?

Remember, we are open 7 days a week and we probably have a broader range of components and kits than your present supplier!

200W (RMS) FULL RANGE P.A. BIN!!

You asked for it — a kit version of those heavy-duty P.A. Bins! This professionally designed pre-tuned Bass-reflex enclosure contains a massive 18" — yes 18"
Celestion 200 watt main driver especially cone-stiffened for higher power Bass or general PA work. Also included are 2 x 100 watt Piezo horns. System crossover is around 2KHz.

Complete kit includes all pre-cut panels, 2 horns, 18" driver, cannon connector, etc.

Build this system yourself and save a fortune on built-up prices. Remember 200

complete

watts RMS capability!!

+ \$20.00 sent anywhere in Australia

Shop Hours:
Mon – Sun –
9AM – 5.30PM



380 Sussex St Sydney 2000. Ph 264 6688

E. A. Graphic Analyser Kit (E. A. March '81) Complete kit of parts including transformer, modulator, Xtals, front panel, etc.\$89.0 \$20.00 Colour Option . Horwood Box to suit \$14.50

E.T.I. 477 Mosfet Amp Module (E.T.I. Jan-March '81)

Complete kit including high voltage Hitachi Mosfets, fibreglass P.C.B., \$59.00 pre wound coil, etc.

Cast front panel

Power Transformer \$39 50 \$39.50 Other components for 5000 amp available.

"Le Gong" Kit (Refer E. A. March '81)\$13.95

"P. C. Birdies" Kit (Refer E. A. May '81) only

Contains all parts, including Jiffy Box, I.C., P.C.B.

2 Channel Infrared Remote Control Kit (Refer E. A. May '81) Complete kit of parts

Sound Level Meter Kit (Refer E. A. May '81)
Complete kit of parts for this project including
high quality electret mic. insert.\$39.50

P.C.B.'s for many other current projects available.

UHF Masthead Amp Kit (Refer E.T.I. April '81) Complete kit of parts including fibreglass boards ...only \$35.00 OM350, power supply, etc. ..

P&P CHARGES: ORDER VALUE CHARGES S 5 S9 99 S 10 S24 99

\$1 00 \$2 00 \$49 99 \$3 00 S99 99 **S4 00** \$100

or more



When the right arm is positioned as it would have been during the crucifixion the blood flows are clearly seen to be vertical. Note the wound in the wrist, presumably from being nailed to the cross, not through the hand as traditionally depicted.

© 1978 Barrie M. Schwortz

One important test that has not yet been carried out is carbon dating, which could tell us the age of the cloth to within ± 100 years. This has until recently been resisted by the Church as it would have necessitated large areas of the cloth being destroyed, but now that carbon dating techniques have advanced, minute threads are enough to enable a dating, and the Church has at last given permission for this to take place.

In recent research using imageintensifying and other equipment associated with the American space project, scientists have come to the conclusion that the image must have been created at a distance by some form of emanation, rather than by contact. This was borne out when, using an Interpretation Systems VP-8 Image Analyser, the image was shown to contain perfect three-dimensional information. An ordinary dimensional picture or photograph does not contain enough information relating to distance and proportions to be immediately translateable meaningful 3-D image. The fact that the Shroud image does must add considerably to the likelihood of its not having been the work of an artist.

The Shroud's history — known and conjectured

The Shroud appeared in Western Europe in the mid-1350s as the property of a chivalrous but poor French knight, Geoffrey de Charny. How it came into his possession has never been explained, but he (or more probably his widow Jeanne de Vergy) was responsible for its first exposition. It passed from him to his son, also Geoffrey, and then to his grand-daughter, Margaret, who finally entrusted it to the keeping of the House of Savoy in 1453. The Shroud was damaged by fire and by the water used to douse it in 1532, and although the triangular patches so evident on all photographs were necessary to repair the cloth after this, the image itself received little damage.

However, it is largely the mystery surrounding its sudden appearance in a relatively humble family in the fourteenth century that has caused so much doubt to be cast on the Shroud's authenticity over the succeeding centuries—apart from the scepticism of those who find 'miraculous' happenings in any case worthy of doubt. In his book The Turin Shroud, Ian Wilson has made a highly credible attempt at dis-

covering the history of the Shroud before the fourteenth century and explaining its mysterious reappearance. To do this he largely uses the evidence of art history to substantiate his theory.

There is a legend, substantiated by some ancient writings, of King Abgar V of Edessa (a prosperous town beyond the borders of the Roman Empire) having corresponded with Christ and later, after Christ's death, having been presented by a disciple, Thaddeus, with some kind of holy or miraculous image of Christ's face. When some years later a king who was hostile to Christianity succeeded to the throne, this 'image' was hidden in a bricked-up niche in one of Edessa's city gates — where it remained, hermetically sealed and beautifully preserved, until around the year 525.

By the time of its rediscovery Christianity was well established in both eastern and western Europe, and the image was immediately revered and worshipped as being an image of Christ 'not made by hands'. It was accredited with miraculous protective powers, and many copies were made of it. The strange thing about this image, which came to be called the Mandylion, was that in many details it resembles exactly the face on the Shroud.

There is no account anywhere in the Gospels of what Christ looked like, and until about the sixth century there had been no tradition or consensus of opinion about this in art. However, around the sixth century likenesses of Christ which correspond in too many details for coincidence to the image on the Shroud start to appear in both Byzantine and western art. They date from the discovery of the Mandylion, supposedly an image 'not made by hands', which would therefore be regarded as the definitive true image of Christ — but they are also identical to the image of the Shroud. Wilson draws the obvious conclusion: the Mandylion and the Shroud are one and the same.

His conjecture is further substantiated by the fact that the Mandylion disappeared from Constantinople (where its home had been since 944) during the sack of that city by the Crusaders in 1204, and has never been rediscovered since. Wilson speculates that the Mandylion/Shroud could have fallen into the hands of the Knights Templar, a religious and chivalrous organisation which was finally quashed by Philip the Fair of France. The Templars were reputed to have strange religious and initiation ceremonies which included the worship of a 'head' — an image of some kind. This of course laid them open to the charge of heresy,



The Shroud is removed from the backing board, which it had been fastened to for public display, by two of the Poor Clare nuns who are responsible for care of the Shroud. In rear pictured left to right: Gabriele Porratti (Italian scientific team) and Don Devan (American scientific team). © 1978 Barrie M. Schwortz

and Philip delivered them not unthankfully to the Inquisition whilst pocketing their considerable wealth.

The treasury of the Templars had been at Acre, on the eastern Mediterranean coast (close to the Gospel areas); from there it had moved to Cyprus and thence to Paris, but the 'image' or 'head' they were said to worship was never found. Descriptions of it, however, make it sound distinctly like the image on the present-day Shroud: it was said to be blurry, pale, indistinct, and many of the features, e.g. the forked beard, correspond exactly.

In 1314 the Templars' Master of Normandy, one Geoffrey de Charnay, was burnt at the stake in Paris; some 40 years later the Shroud as we know it turned up in the possession of Geoffrey de Charny. It does not seem unreasonable to conjecture some kind of family relationship—the spelling of the name was irrelevant in those days—whereby Geoffrey de Charny came into possession of the Shroud; it would also explain his family's reluctance to explain where the Shroud came from—de Charny would not wish to be accused of heresy as a Templar.

Whilst this conjectural history of the Shroud is pretty convincing, it must be emphasised that it works from the premise that the Shroud *is* genuine; if one wishes to look at it another way, the theory also gives us a fair amount of evidence to suppose that the Shroud could be a copy of the Mandylion — if the scientific evidence didn't seem to be against the Shroud's having been the work of an artist.

The question of authenticity

When talking of the Shroud's authenticity, it must be emphasised that we are talking about whether or not it originates from the first century A.D., and whether or not the image was 'made by hands'. Science will never be able to prove or disprove conclusively whether it was Christ's body that caused the image to be formed or not; that must be left to the speculation of religion.

There are, however, many scientific findings which indicate that the Shroud is not fourteenth century artistic forgery: the lack of pigments found, the absence of any penetration of the fibres or the spaces between fibres, the consistency of the weaving and the cotton particles with the Middle Eastern area around the first century, the anatomical evidence of the crucifixion, the pollen samples from Middle Eastern areas, notably around the Dead Sea, as well as from Constantinople and Europe. These samples also substantiate Wilson's theory that the Shroud spent some time in Edessa, which is in the region of the Anatolian steppe.

There is also the question of the means of image formation, the aspect of the Shroud which scientists study with the most interest; even if it was manmade, we still have no idea of the process.

If Ian Wilson's theory of the history of the Shroud is accepted, this would diminish scepticism about its authenticity on the ground of its mysterious appearance. We would therefore seem to be left with only one large stumblingblock to acceptance of the Shroud as an

authentic image of a resurrection: the fact that it's never been seen before or since, and without explanation of the process many people are unable to accept it as a miracle.

How was the image formed?

As stated, this question arouses the main curiosity of scientists; what force could possibly have caused the formation of this negative, three-dimensional image? The word 'force' is used purposely, since it seems more and more apparent from modern research that the image was not caused by direct bodily contact with the Shroud. Attempts at reproducing this 'contact' process with bodily oils, unguents, etc, have failed to produce anything looking remotely like the image on the Shroud. The lack of penetration of the 'blood' or the image into the fibres supports this, as does the three-dimensional information carried

A more promising suggestion is that the image is some kind of scorch, the colour being the sepia of the first stage of the oxidisation process before actual burning. A cloth placed over a heated brass ornament produced an image far more like that of the Shroud than any other experiment yet tried, and spectroscopic laboratory analysis bears this theory out.

What, however, could have caused a dead body to produce a radiance or force sufficient to scorch cloth, acting in so controlled a manner and over so short a period that it dissolved and fused blood flows on to the cloth as well as creating the perfect impression of the body, yet without actually burning the cloth? Some kind of very swift thermonuclear flash, acting in an upward and downward direction with no diffusion, is the answer that has leapt to the minds of many scientists, though they are no nearer to explaining how this could be possible than they were before. However, as experience at Hiroshima has shown, such powerful blasts can cause prints of shadows cast by the light of the blast to be imprinted on buildings, etc. There are even photographs to prove

So although scientists now have better access to investigation of the Shroud than ever before, none of their work has yet been conclusive. Research has indicated that the Shroud is unlikely to be an artist's forgery, yet scientists still cannot explain how the image got on to the linen, either naturally or by the hand of man. For this reason the results of the analysis of the scientific tests of 1978 are eagerly awaited to provide more evidence to help unravel the mystery of the Holy Shroud of Turin.



Features:

• Our exclusive step-by-step instruction manual. If you can solder two wires together, you can build this kit.

Our Exclusive 'Sorry Dick, it doesn't work' coupon. If for some reason you cannot get the amplifier working you can send the board back to us and, for a small fee, our Service Centre will get it working for you.

Our Exclusive money back guarantee. Examine the kit in your home for up to seven days. If you think construction is beyond you, return it in orginal condition and packaging, and we'll give you a full refund.

DICK SMITH Electronics



Your Playmaster Amplifier will be despatch within 24 hours of receipt* of this order - please allow normal parcel delivery times. * As long as we have stock!!!

RARE ADDITIONS FROM MARANTZ. SLIMLINE COMPONENTS.



Rare: very valuable.
Addi'tions: the things added.
Ma'rantz: a range of ultra-high
performance Slimline Components
which blend state-of-the-art engineering
with operational versatility.

MARANTZ ST450 AM/FM STEREO TUNER

Electronic Gyro-Touch tuning and digital display enable precise and speedy station selection which can be servo-locked for drift-free operation.

MARANTZ EQ20 STEREO GRAPHIC EQUALIZER

Beautifully styled, the EQ20 provides highly personalised tone control flexibility with its ten detented slide controls per channel – the perfect finishing touch to any high quality audio system.

MARANTZ SC500 STEREO PREAMPLIFIER

Traditional Marantz performance in the all important first stage of amplification. Moving coil cartridge head-amp and different cartridge load inputs are just two of the comprehensive number of facilities.

MARANTZ SM500 DC POWER AMPLIFIER

Perfectly complements the SC500 and delivers 50 watts RMS per channel. Output is displayed on two large, peak responding power level meters.

MARANTZ PM350 INTEGRATED AMPLIFIER

Bass, mid and treble controls and LED power level meters, combined with an output of 30 watts RMS per channel, make this the ideal amplifier for normal listening levels.

MARANTZ SR1100 AM/FM STEREO RECEIVER

Slim, stylish and component width, the 30 watt RMS per channel SR1100 provides a new concept in compact audio sophistication.

MARANTZ SD5010 STEREO CASSETTE DECK

Forerunner to a new generation of superior cassette decks, the SD5010 has soft-touch controls, LED meters, metal tape facility, fine bias control and an electronically controlled linear skating mechanism operating the cassette drawer.

Shown are but a few of the new Marantz Slimline Components. If you see your hi-fi as an investment and, if you demand critical performance standards as well as the best value for money, listen to the future.

Listen to Marantz.

Now you're listening.

Distributed by MARANTZ (AUST.) PTY. LTD. P.O. Box 604, Brookvale, N.S.W. 2100 Telephone: (02) 939 1900 Telex AA24121 Melbourne (03) 329 7655 Brisbane (07) 446 478 Adelaide (08) 223 2699 Perth (09) 276 2944



Introducing the futuristic SL10, Technics' new quartz-locked, AC/DC, direct-drive turntable. Unlike conventional turntables, the SL10 has an electronically-controlled linear tracking arm that doesn't depend on gravity to track a record. All contact with a record is controlled by microcomputer, so the SL10 plays perfectly at any angle-even upside down.

The precise tracking arm control is designed to extract the maximum amount of musical detail from your records.



It's the kind of innovative thinking you expect from Technics—who introduced the world's first direct-drive turntable 10 years ago. And yet all this sophisticated technology is contained in a piece of equipment the same width and depth as an LP cover.

The SL10 is part of the highly advanced Technics range. See it at better hi-fi stockists.

We're sure you'll agree it's definitely the product of a superior intelligence.

Technics
National Panasonic (Australia) Pty Ltd

Expanding the music experience.

It's a better system, at a better price, and it's Sony. In Sony's new TC-K81 three head cassette tape deck, each head

The new TC-K81 also has microcomputer control and feature-touch operation, and LED Peak Programme Meter,

Sony's 3 head system. It's 3 ways better.

has its own individual casing and suspension system.

You get precise azimuth alignment,* equal record and playback head-to-tape pressure, and reduced magnetic leakage flux.

It's a unique three-head system, with two-motor, closed-loop dual capstan drive with metal tape compatibility.

bias and record level calibration system, and Dolby** NR.

It's an exceptional new system, at an excellent price.
And it's Sony.

So in three-head technology, we're three-ways better.

SONY

*Factory aligned.

**Dolby is a registered trademark of Dolby Laboratories.



Scientific examination of the Holy Shroud

Few archaeological artefacts or religious relics have attracted such intense cross-disciplinary scientific interest as this. Some 50 scientists and technicians spent a week in October 1978 making an enormous variety of measurements and taking samples. Some of the results of this mammoth effort began to appear last year. This is the first review article of the researches yet published. Is the Shroud authentic, or a fake? The evidence is amazing!

Brian Dance

THE HOLY SHROUD of Turin is not only one of the greatest religious mysteries of all time, but this ancient treasure is also posing very intractable scientific problems. These problems are puzzling many of the world's top scientists, who are still unable to explain exactly how such an image could have been produced. Even if the image had no religious significance, the way in which it has been formed would justify extensive study in itself.

The Holy Shroud of Turin is an old, rather yellow piece of linen cloth about 4.3 m long by 1.1 m wide. It bears a faint image of a naked man of about 1.8 m (5'11") in height. One of its strangest features is that the highlights and shadows in this image are reversed as in a photographic negative. The image shows brownish-red stains, these being in the form of a positive image in the regions of the wrists and feet where crucifixion wounds would have been made, and also has stains resembling blood around the head and in the side of the chest, etc. Even stranger is the fact that the image (at least in the face and hands) contains three-dimensional information; scientists are using the computers designed to process the images of distant planets to try to unravel the mysteries of the image on the Shroud.

The Turin Shroud has been a subject of controversy for centuries. Many scientific results tend to support its authenticity, but even as I write this, I hear a report on British radio that Dr. Walter McCrone has found particles of fine grain oxides in samples taken from the Shroud on sticky tape in 1978, which could have arisen from paint used by a mediaeval image faker. In addition, Dr. McCrone was stated to have found 'tempera' in the specimens



(Left to right) Dr. Ray Rogers, Dr. John Jackson (American scientific team) and Professor Giovanni Riggi (Turin, Italy) take their first glimpse of the underside of the Shroud as Professor Luigi Gonella (represent-© 1978 Barrie M. Schwortz ing the Archbishop of Turin) looks on.

- a material used in ancient paints. However, the results of the recent work seem to show conclusively that the image could not be a painted one.

The image

The brownish-coloured image on the Shroud is that of a nude man probably aged between 30 and 40 years. One half of the Shroud carries an image of the front of the man and the other half of the back, so it seems that the body was laid with the feet at one end of the Shroud and the head at the middle; the other half was then folded over the body.

It was not until 1898 that the image was discovered to be a negative one. Secondo Pia had taken a photograph of the image and realised that the image on his photographic plate was really the positive and the Shroud image the negative. Who would wish to fake the image of a man as a negative (before photography was known)?

Paintings of crucifixions show nails driven through the hands of the crucified person, but the French surgeon Dr. Pierre Barbet experimented with dead people and found that nails in the palms will not support the weight of the body. He found that a nail in the forearm would do, but it was not until 1968 that the skeleton of a crucified man was found with marks on the arm showing a nail had been driven through the arm. Thus both medical and archaeological evidence indicates that the crucifixion marks on the wrists of the Shroud image are in the correct places, whereas a faker would have put the nails in the centre of the palm as the painters have

The apparent absence of thumbs in the Shroud image has been attributed to the nails driven through the wrists piercing the median nerves and producing an automatic contraction of the thumbs.

Little more scientific knowledge about the Shroud came to light until 1973, when it was found that the image on the cloth is quite superficial, having a depth of only a few micrometres⁽³⁾ on the top of the linen threads. The image is not visible under the microscope inside a thread.

If some form of paint had been used to produce the image on the Shroud, the medium used would have darkened more rapidly than the remainder of the cloth⁽³⁾, but no discolouration of this type is visible. One would also expect the paint medium to affect the flow of water used during the fire through the image region, but this is not found⁽³⁾. Thus if the image had been painted on the linen, it seems this painting must have occurred after the fire of 1532 and this is known to be contrary to fact.


Pollen samples

In the 1973 tests sticky tape was pressed on the Shroud to remove dust and any other particles which adhered to it. It was found that pollen grains were present not only from plants found in France and Italy, but also from those found in Palestine and in saline regions such as the Dead Sea. This may give some general indication that the Shroud had at one time been in the region of Palestine, but it cannot prove this, since pollen can be carried very long distances by various means (birds, winds, etc).

Three dimensions

In 1977 two scientists of the US Air Force Academy, John P. Jackson and Eric J. Jumper, reported that they had found that the density (or darkness) of the image varies directly with the distance that the corresponding part of the body would have been from the Shroud which covered it⁽⁴⁻⁶⁾. Microdensitometer measurements have been correlated with the estimated bodycloth distance and these suggest that the image contains three-dimensional information. The darkest parts of the image, such as the nose, would have been closest to the Shroud.

Jumper and Jackson felt that the image must therefore have been formed at a distance and not by close contact. They carried out measurements on the cloth-to-body distances using a man of similar build in a similar pose with the aid of stereometric photography⁽⁶⁾. Their photographs were processed with a complex image analyser instrument which had been designed to convert variations of image intensity into

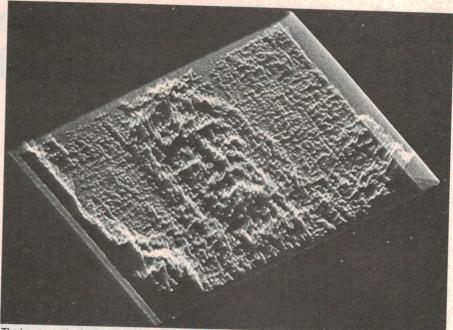

The image on the Shroud when viewed on the VP-8 Image Analyser. (Courtesy JPL).

distance. They found that the Shroud contains three-dimensional information and used a computer to reconstruct a three-dimensional model of the image. This clearly showed that the image of the Shroud is quite unlike any normal photographic image. The smallest feature of the image which can be resolved is 5 mm⁽⁷⁾.

Our discussion so far has been a brief account of the work on the Shroud up to 1978, although many details have been omitted for brevity. For example, we have not considered the attempts made to produce shroud-like images by scorching linen. Neither have we considered the ancient practice of washing cloth in a solution known as 'struthium' (containing the soap weed Saponaria officinalis) which not only softens the cloth, but which is toxic to simple living organisms and which therefore inhibits the growth of moulds, mildew, etc.; such a wash may have given the Shroud its fluorescence(3).

STURP

It was largely through the interest created by the three-dimensional image work in the USA that a team of 32 specialist US scientists was formed who sought and obtained permission to carry out by far the most thorough scientific investigation ever made on the Shroud.

Some of the scientists call themselves 'sindologists', this name being derived from the Italian word 'sindone' (shroud). They are a largely self-appointed, independent, non-profit-making group of scientists and assistants and do not work under the auspices of any other body. The name STURP (Shroud of

Turin Research Project Incorporated) has been adopted by this group. Previous investigators have been mainly selected by the Archbishop of Turin.


STURP's scientific proposals were submitted to the Archbishop of Turin (keeper of the Shroud) and to Centro Internazionale di Sindonologia in September 1977, and to Umberto II, a former King of Italy and the legal owner of the Shroud; all gave their approval.

The workers were divided into teams to cover the various types of investigations. They worked out their testing schedule and collected and constructed specialised instruments ready for their trip. Basically they were to examine the Shroud with electromagnetic radiation of all wavelengths from the mid-infrared through the visible and ultraviolet to the X-ray region.

A special test frame was constructed to support the Shroud and its backing cloth, which had been sewn to it after the fire of 1532. The frame could be rotated from the vertical to the horizontal⁽⁹⁾ and magnetic strips were used to hold the Shroud. Panels 200 mm wide could be removed from the middle part of the frame to provide optimum access for some X-ray investigations.

Operation STURP

The Shroud was placed on public display in October 1978 to commemorate the 400th anniversary of its arrival in Turin, this being the first public display for 45 years. At the end of this display on Sunday, October 8 1978, the Shroud was removed from its nitrogen-filled case to

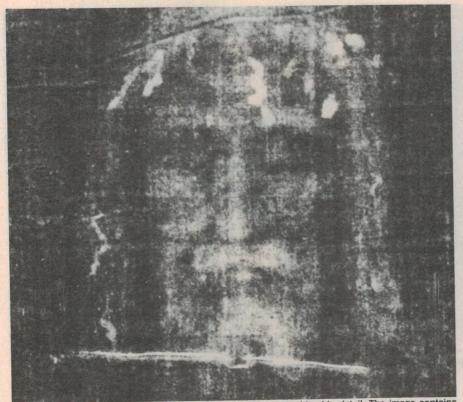

A photographic negative of the Shroud facial area shows considerable detail. The image contains three-dimensional information — darkness (brightness here) varying with apparent distance from body to cloth. The most striking evidence of this was produced by Jackson and Jumper, seen in the picture at left, using image analysing equipment at the California Institute of Technology's Jet Propulsion © 1978 Barrie M. Schwortz

the nearby Visiting Princes' rooms of the Palace of the House of Savoy, where it was given over to the scientists for five days.

The main objects of the investigations were to try to establish the nature of the image on the Shroud, to characterise the image spectrally over a wide range of wavelengths, to investigate the nature of the stains on the Shroud and in particular to try to ascertain if they are due to blood, and to study the manufacturing technique of the cloth so as to check whether it is likely to have been woven about the time of Christ. It was also hoped to be able to make recommendations about the optimum conditions of storage to prevent degradation of the image with time. The testing had to be



Transferring the Shroud from its display support board to the Shroud support table. Pictured left to right: Don Janney, Tom D'Muhala, Mark Evans, John Jackson, Don Devan. In background: Ricardo Bissi (Italian team photographer).

© 1978 Barrie M. Schwortz

non-destructive and could only be carried out during this one period.

The team of investigators, almost all from the USA, has agreed to publish all their findings and some of their papers have already appeared. The Church has agreed that it will not interfere with these publications. As the scientists have been working in their spare time, there has inevitably been some delay in the publication of their results. A 'complete' report may appear by 1982.

Scientific work

The work of the scientists included looking for fluorescence under X-ray and ultraviolet irradiation. X-ray fluorescence provides data on the elements present in various parts of the Shroud. In the X-radiography work, low-energy X-rays were passed through the Shroud and were detected by an X-ray film placed at the back of the Shroud. The films were manually processed in a nearby darkroom and were given a preliminary visual examination so that any necessary changes could be made in the exposure of the subsequent films⁽⁹⁾.

In the visible region an extensive series of photographs was made with red, green and blue filters for colour separation so that colour mosaics of the whole surface of the cloth could be built

up at reductions of 5.6:1 and 22:1(9). The importance of this visual light photographic work becomes obvious if one remembers that the computer work on the image, including three dimensional image work, was carried out with photographs made in 1931(10). The filters were chosen by Sam Pellicori, a physicist employed at the Hughes Aircraft Company's Santa Barbara Research Centre, California, so as to bring out the slight colour differences between various parts of the Shroud. The images underwent further processing by computer programs developed at the Jet Propulsion Laboratory's Image Processing Laboratory for Planetary Studies, which have been especially designed to bring out every possible piece of detail in the images returned by spacecraft from distant planets. The raw images returned by such spacecraft often show little contrast - rather like the Shroud. Over 500 photographs were taken at various wavelengths.


In other work ultraviolet transmitting filters were used for contrast enhancement. Another series of photographs was taken in which the visible spectrum was divided into 10 nm intervals by a series of filters(9). The Shroud was also examined in infrared radiation to ascertain if any new visible, became chemicals containing certain groups of atoms may be identified in this region. Infrared thermographic techniques were employed, since together with micro-Raman spectra these are considered to be the most likely methods for identifying blood components and certain types of burial substances mentioned in the Scriptures(8).

Minute particles of fibre, pollen, dust, etc. were removed by means of specially prepared adhesive tapes and also by means of a suction device. In the case of the tape, both the adhesive and the tape were made of pure hydrocarbons so that the Shroud was not contaminated — indeed, the scientists wore white gloves when handling the Shroud. The adhesive tape was applied to the Shroud with a specially designed roller; after it had been removed each tape was attached to a labelled microscope slide and placed in a box which was later sealed.

The particles of material removed on the tapes were examined by visual microscopy and by the micro-Raman method. Further work on these particles involved electron spin resonance, electron microscopy, ion microprobe techniques and the scanning electron microscope⁽⁹⁾. It is hoped that scanning electron microscope images at magnifi-



(Left to right) Chemist Ray Rogers (American scientific team) looks on as Swiss criminologist Dr. Max Frei takes a tape sample of the Shroud. Rogers took 36 tape samples for the American team. © 1978 Barrie M. Schwortz

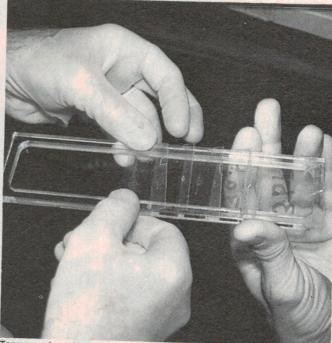

Tape samples taken from the surface of the Shroud are placed on specially sterilised glass plates.

© 1978 Barrie M. Schwortz

cations of up to 10 000 times will provide data of the image depth and sharpness at different points on the Shroud and this may help us to produce a satisfactory theory of the image formation mechanism⁽⁸⁾.

Even the back surface of the Shroud was examined after parts of the backing cloth (stitched on in the 16th Century) had been loosened. An Italian biologist, Giovanni Riggi, employed fibre optics to photograph the back surfaces, and he also collected particles from it⁽⁶⁾. A few extra threads were taken for later examination.

Now that we have looked generally at the scope of the 1978 investigations, we will consider specific items of the work in more detail, together with the results already published.

X-ray fluorescence

The main aim of the X-ray fluorescence experiment was to estimate the variations in the concentration of the elements in different areas of the Shroud containing 'blood' stains, other parts of the image, the background cloth, the scorch areas and the patches⁽¹¹⁾. Elements with atomic numbers exceeding 16 could be detected with the equipment used.

An X-ray tube operating at 50 pkV and 20 mA and shielded in lead (Figure 1) had its beam directed on to a tin target within the shielding(11). This produced the 25.5 keV K-alpha radiation, a 12 um thick silver foil located over the outlet removing the K-beta

radiation from the tin target. Thus this system produced a beam containing almost monochromatic 25.5 keV X-rays which were allowed to strike the vertical surface of the Shroud at about 45°.

The fluorescent X-rays from the Shroud were detected by a silicon (lithium) semiconductor detector shielded with lead so that an area of 1.3 cm² of the Shroud surface was examined at any one time. The pulses from the detector were amplified and fed to a pulse-height-analyser having 512 channels. Each spectrum was transferred to a digital cassette for subsequent analysis.

The X-ray fluorescence workers collected a total of 37 spectra (including background, calibration and Shroud data) and made further calibration measurements after their return to Los Alamos⁽¹¹⁾. The most obvious feature in all of their spectra was a Compton peak formed by the scattering of 25.5 keV X-rays by electrons. However, one can detect elements present in the Shroud by the presence of peaks in the photon energy spectra at less than 20 keV; these peaks are due to the K-alpha radiation of the elements (fluorescence).

A prominent peak due to iron at 6.4 keV (with a smaller peak at 7.0 keV due to its K-beta X-rays) was found in



Scientists eagerly examine the underside of the Shroud, seen for the first time in 400 years. This is the first photograph taken of the underside of the Shroud.

© 1978 Barrie M. Schwortz

the 'blood' stained regions and a much smaller iron peak in other areas of the Shroud (Figure 2). This does not prove that the 'blood' stained areas contain blood, since a material such as jeweller's rouge (Fe₂0₃) could have been used as an image-colouring agent. A quantitative comparison between whole blood, rouge stains and the Shroud results was made. Calcium and strontium were found, but the workers suggested that these may have arisen from dust carried from the marble and limestone regions of northern Italy. The absence of heavier atoms, as far as could be detected with the equipment used, indicates that pigments or dyes containing such elements could be present only in small amounts.

The paper concludes by suggesting that radioisotope sources have advantages over an X-ray tube source for any future X-ray fluorescence study⁽¹¹⁾. It is feasible for a future study to look for potassium in the 'blood' stains with equipment of adequate sensitivity, since blood contains appreciable amounts of this element as well as iron.

UV work

The ultraviolet-visible reflectance and fluorescence spectra from the Shroud have been investigated in detail by the husband-and-wife team of Roger and Marion Gilbert, who state⁽¹²⁾ that their measurements were performed as an aid to later analysis of the substances making up the various stains on the cloth and to a possible determination of the manufacturing techniques of the

cloth. They took fluorescence and absolute reflectance spectra on areas of the Shroud not containing markings for possible comparison with other cloth samples. They also recorded fluorescence and relative reflectance spectra of the image, scorched and bloodstained areas, the reflectance being relative to clear areas.

These workers used a 150 W xenon lamp or a 200 W mercury arc lamp with 1200 line/mm diffraction grating monochromator to provide a beam of 5 nm bandwidth, which illuminated a 6 mm by 3 mm area of the Shroud at an incident angle of 45°; this angle was chosen rather than 0° in order to reduce the apparent spaces between the threads of the cloth and hence to reduce the contribution from the backing cloth. The beam optics need not concern us. The detection channel was similar to the source channel and contained a second monochromator with an 8 nm bandwidth. The output from this second monochromator was directed onto the photocathode of a photomultiplier tube.

A voltage proportional to the wavelength of the second monochromator was fed to the x-axis input of a pen recorder and the amplified signal from the photomultiplier tube to the y-axis input. Twenty six scans were made over the 250 nm to 750 nm band in the re-

flectance measurements and a scan of magnesium oxide was made; the reflectivity of the latter was assumed to be unity. The xenon lamp was used for these reflectance measurements.

The mercury arc lamp was used in the fluorescence measurements with the source monochromator set at 365 nm and an ultraviolet-transmitting, visible-absorbing filter after the monochromator to reduce stray visible light. An ultraviolet-absorbing filter was placed in the detection channel and the monochromator was continuously scanned from 390 nm to 700 nm.

The relative spectral reflectance of four areas of the Shroud image is shown in Figure 3 and the spectral fluorescence of four similar areas in Figure 4(12). It can be seen that the lower the reflectance of an area, the lower the fluorescence. At lower fluorescence levels, the peak moves towards longer wavelengths.

These workers noted that the image (without magnification) seems to have the same sepia colouring as the lightest of scorch marks and that the image colour does not seem to come from a particular matter. The image is extremely faint under backlighting, whereas the bloodstains then stand out as dark reddish-brown spots.

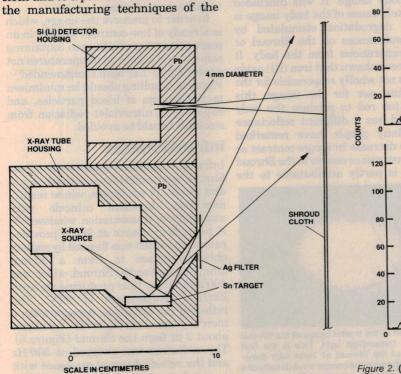


Figure 1. The apparatus used for the X-ray work. (Reproduced from reference

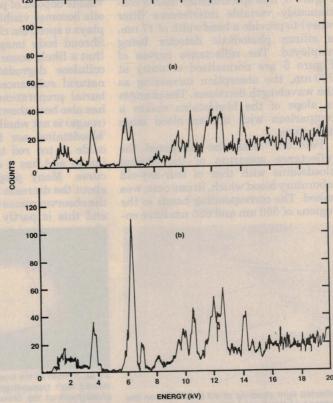


Figure 2. (a) X-ray fluorescence spectrum; (b) similar spectrum taken over the side wound 'blood' region. Note the higher peak at 6.4 keV. (Reproduced from reference 11.)

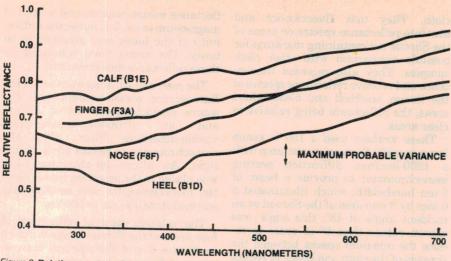


Figure 3. Relative spectral reflectance of four regions of the body image. (Reproduced from reference 12.)

The body image areas seem to have the same spectral reflectance properties as those of the scorched areas together with similar fluorescence characteristics. The stains seem to quench the fluorescence of the cloth and to exhibit a low-level fluorescence of their own in the 600-700 nm region.

Further spectral work


Further work on the spectral properties of the Shroud, mainly in the visible region, has been described in a paper by S.F. Pellicori⁽⁷⁾. His results using a 'quick look' spectrometer are shown in Figure 5; this spectrometer used a continuously variable interference filter wheel to provide a bandwidth of 17 nm, a silicon photodiode detector being employed. The reflectance curves of Figure 5 are normalised to unity at 700 nm, the absorption increasing as the wavelength decreases. The changes in slope of the bloodstains makes a comparison with human blood more definitive.

Pellicori⁽⁷⁾ has also compared the reflectance spectrum of the Shroud bloodstains with that of four-day-old laboratory blood which, in one case, was baked. The corresponding bands in the regions of 550 nm and 625 nm have en-

Reflected light close-up of #3 bloodstain on the forehead of the frontal image, with a 6 cm grid placed over that area of the Shroud for size reference.

abled him to say that there is sufficient correlation to decide that the material on the Shroud is blood.

The relative spectral responses of substances that may once have been in contact with the Shroud have been examined before and after baking in air for five hours at 150°C; the baking simulates aging of the cloth and produces a colour similar to that of the clear areas of the Shroud(7). This colour is due to the formation of double bonds in the cellulose, which results in increasing absorption at shorter wavelengths. Experiments have shown that an invisible deposit of perspiration plus skin oils becomes visible on baking and displays a spectrum closely resembling the Shroud body image. It was concluded that a likely cause of the body image is cellulose degradation stimulated by natural substances on the Shroud or burial preparations from the body. It has also been shown that iron (III) oxide (rouge) is not wholly responsible for the 'bloodstains' nor for the image; this oxide is too red to produce the body image and has a different reflectance curve. Many people have remarked about the decrease in image contrast as the observer comes nearer to the Shroud and this is partly attributable to the



#3 bloodstain of the frontal image of the Shroud viewed with transmitted light. This is the first photograph of the Shroud of Turin with transmitted light, showing the comparative density of a bloodstained area versus image area.

© 1978 Barrie M. Schwortz

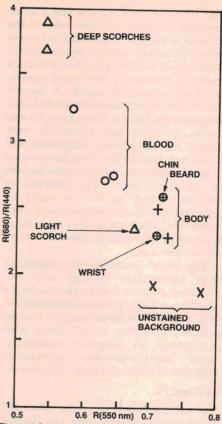


Figure 4. Spectral differences of various details on the Shroud are intensified by taking the ratio of widely separated reflectances and normalising to the absolute R at 550 nm. Notice the grouping by stain type, and that the darker the feature is, the redder it is. The body image points 'Beard' and 'Wrist' contain minute traces of blood.

increased contribution of scattered light into the cone of vision.

In order to preserve the image, which is already of low-contrast, storage in an inert atmosphere (nitrogen) containing some water vapour at temperatures not exceeding 25° has been recommended⁽⁷⁾. Physical handling should be minimised to reduce loss of blood particles, and exposure to ultraviolet radiation from sunlight should be avoided.

Infrared studies

Infrared reflectance spectroscopy of the Shroud was undertaken in the 3 - 5 um and the 8 - 14 um bands, where readily available detectors coincide with atmospheric transmission windows(13). A black-body source at 980°C provided radiation, which was focused by sodium chloride lenses to form a 20 mm diameter spot on the Shroud, which was 400 mm away, thus producing an equilibrium temperature of 59°C. The reflected radiation was detected with a mercury-cadmium-telluride detector about 2 m from the Shroud (Figure 6). The radiation was chopped at 500 Hz and the reflected signal processed with a synchronous amplifier to provide background rejection.


The spectral similarities of most of the features observed rendered the results somewhat inconclusive. The Shroud bloodstained areas showed different spectra from known bloodstains both in the shorter (Figure 7) and longer wavelength (Figure 8) bands. It has been suggested that these differences are due to surface effects rather than the chemical composition of the materials (13).


The same workers carried out imaging experiments in the same two wavelength bands using two 1500 W photographic floodlamps to illuminate the area⁽¹³⁾. No image contrast was observable without this illumination, showing that an increase in the temperature above that of the background was required; without this the differences in emissivity were below the limit of sensitivity of the cameras. Good contrast was found in the 8 to 14 um band, but no features could be found in

Figure 5. Shroud background linen and modern linen artificially aged by baking. Reflectance of iron oxide to be compared with body image (Figure 7). If Fe₂0₃ were present in a high enough concentration to make up a visible image, its reflectance curve would be quite different from the Shroud's image.

Figure 6. Comparison between Shroud blood spectrum and laboratory blood artificially aged by baking.

Figure 7. Laboratory simulations of body image spectral reflectance characteristics produced by accelerated aging, and Shroud body image included for comparison. P₁ and P₃ are skin oil plus perspiration.

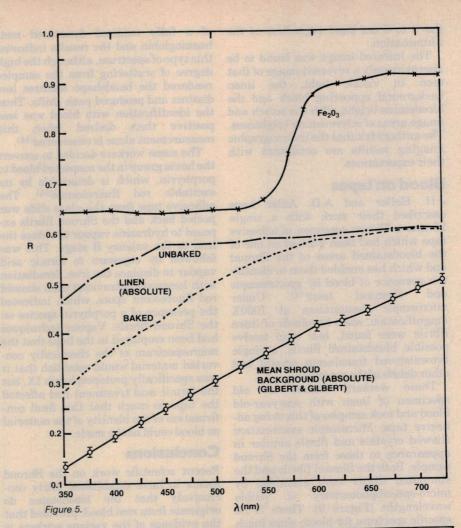

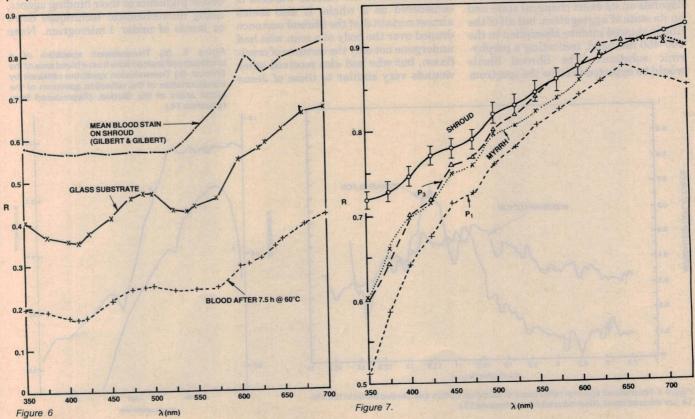

the 3 to 5 um band regardless of the illumination.

The infrared image was found to be approximately a reversed image of that seen in visible light, the linen background appearing black and the bloodstains bright, with the scorch and image areas of intermediate brightness. The authors felt that the thermographic imaging results are consistent with their expectations.

Blood on tapes

J.H. Heller and A.D. Adler have described their work with a single 25 mm x 75 mm specimen of adhesive tape which had been pressed on one of the bloodstained areas of the Shroud and which has enabled them to identify the presence of blood by spectroscopic and chemical tests(14). Under microscopic examination at 1000X magnification, some hundreds of linen fibrils were found, less than twelve possible bloodstained fibrils, a single brownish-red translucent crystal and other debris of the centuries.

These workers stained an old specimen of linen with one-year-old blood and took samples of this using adhesive tape. Microscopic examination showed crystals and fibrils similar in appearance to those from the Shroud sample. Both the Shroud fibrils and the simulated fibrils were examined by micro-spectrophotometry at visible wavelengths (Figure 9). There is no specific spectrum for blood, since much depends on its exact chemical state and on its state of aggregation, but all of the fibrils showed intense absorption in the 400-450 nm band, indicating a porphyrinic substance. The Shroud fibrils would be expected to show the spectrum

of a fully oxidised denatured methaemoglobin and the results indicated this type of spectrum, although the high degree of scattering from the samples rendered the bandshape features less distinct and produced peak shifts. Thus the identification with blood was less positive than desired when this measurement alone is considered⁽¹⁴⁾.

The same workers decided to convert the heme group in the suspected blood to porphyrin, which is detectable by its excitable red fluorescence(14). adhesive tape from the glass slide was peeled back and the Shroud fibrils exposed to hydrazine vapour to reduce the iron to the valency II stage. This was followed by exposure to formic acid vapour to displace the iron. Irradiation with longwave ultraviolet then showed red fluorescent spots, which indicated the presence of a porphyrin species on the Shroud fibrils. Vapour techniques had been employed in the hope that the microspectrum of the chemically converted material would establish that it was specifically protoporphyrin IX, but the formic acid treatment had affected the tape so much that this final confirmation of the identity of the material as blood could not be made.

Conclusions

Recent scientific work on the Shroud seems to have established fairly conclusively that the bloodstains do originate from real blood, provided that the evidence of the various workers is considered as a whole. It also seems almost certain that the Shroud was once draped over the body of a man who had undergone not only the tortures of crucifixion, but who had also received other wounds very similar to those of Jesus

Christ as described in the Gospels (the side wound, the crown of thorns and the beating).

The conclusions on the mechanism of image formation seem less definite. The suggestion of Pellicori that the image was formed by perspiration and oils accelerating the normal degradation and darkening of the cellulose of the cloth seems to be the most promising. It is supported by laboratory evidence in which darkening of cellulose cloths was speeded by baking; body oils, sweat and olive oil (the latter is found in myrrh and aloes used in the burial oils of ancient Palestine) were used in these experiments(15). The images formed in some hours and had some characteristics of the Shroud image when viewed microscopically.

Pellicori's hypothesis suggests the Shroud image was formed by skin contact. Some say this could not explain the three-dimensional effect, but Pellicori(15) feels we do not yet have enough understanding of the image transfer mechanism to answer this point. Not all scientists agree with Pellicori's suggestions. Early suggestions that the body image is light singeing of the cloth with a hot statue seem to be refuted by ultraviolet fluorescence studies, which show that the body image has a different fluorescence from the firescorched regions. As regards the work of McCrone (mentioned earlier), the STURP team made extensive tests to detect pigments or their binding agents, using microchemical techniques down to levels of under 1 microgram. None

Figure 9. (a) Transmission spectrum of a brownish-red stained fibril from a blood area of the Shroud. (b) Transmission spectrum obtained by transformation of the reflection spectrum of the blood areas of the Shroud. (Reproduced from reference 14.)


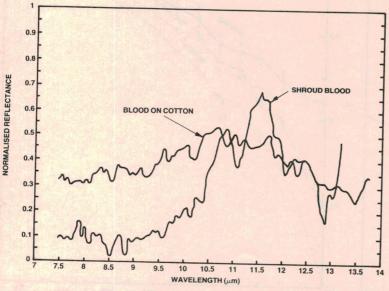


Figure 8. Normalised spectral reflectance of blood-on-cotton and Shroud blood in the 8 to 14 μm infrared band. (Reproduced from reference 13.)

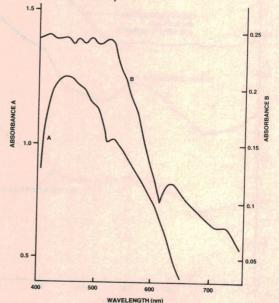

were found and the traces of iron oxide revealed were not only invisible to the naked eye, but equally distributed throughout the image and non-image areas. How could they produce the image, in spite of McCrone's views?

The very detailed tests on the Shroud have given no indication that it could have been a fake — indeed, they indicate the opposite view. Although it might have been possible to prove the Shroud a fake, it seems science can never prove it is genuine, nor whom it covered — although no other suggestion than that it was the body of Jesus Christ seems to have been made. Science's main concern, however, is with 'how?' and not with 'whom?'.

Rev. David Sox (formerly Secretary of the British Society for the Turin Shroud) stated on British Radio that he is still not sure whether the Shroud is a fake. He has been pressing for its carbon dating for many years, but mentioned he no longer considers the Shroud to be important to his beliefs — especially as there is no indication in the Gospels that such a sign would be left for posterity.

Carbon dating

Now that we have considered the published results of the work which has already been carried out on the Shroud, let us consider a long-proposed test which has not yet been performed. If the approximate age of the linen could be established, this might provide additional evidence as to whether the Shroud was made about the time of Christ. The obvious technique is the well-known one of carbon dating developed by Willard F. Libby.

(a radioactive Carbon-14 emitter) is formed in the upper atmosphere of the earth when neutrons formed by cosmic radiation interact with nitrogen nuclei. This carbon-14 has a long half-life (about 5730 years), so it becomes well-mixed with the nonradioactive carbon of the earth's atmosphere. Plants take in carbon dioxide from the air, so that the amount of carbon-14 per gram of carbon in a plant becomes equal to that in the air. This amount produces 15.3 radioactive disintegrations per minute per gram of carbon (dpm/g).

If a plant ceases to live, the carbon-14 it contains will continue to undergo radioactive decay but no new carbon-14 is taken in from the atmosphere. Thus after 5730 years the activity of the carbon-14 falls at 15.3/2 = 7.65 dpm/g. Hence by measuring the activity of a specimen of carbon from a material such as linen which was once a living plant, one can estimate the time at which the plant ceased to be alive. An accuracy of

the order of +/-150 years may be obtained for a specimen aged about 2000

The reason this carbon-14 decay has not yet been used for dating the cloth of the Shroud is that an area of some hundreds of square cm⁽³⁾ of the cloth would have been destroyed by such work through the use of the dating techniques available in the past. If the results were ambiguous, still more of the cloth would be needed. In any case experts feel it would be very surprising if the Shroud cloth has a date before the first century or after the fourth century⁽⁸⁾, so one may well ask whether carbon dating can provide much useful information.

Recently carbon-14 dating techniques have been developed which should be able to give an estimate to within about 100 years using only a few milligrams of the cloth. American workers at the University of Rochester and at the Brookhaven National Laboratory have proposed dating by this new technique, which involves an accelerator and a sensitive mass spectrometer. The Shroud's owner, King Umberto, has already given his assent⁽³⁾ and the matter is still under consideration by the Archbishop of Turin.

Material in the form of a few threads has already been removed for the purpose of carbon dating so that it will not be necessary to open the sealed Shroud container to obtain samples. It seems almost certain that dating will be carried out in the not too distant future with laboratories in the USA and England competing for the work on milligram samples.

Acknowledgements

The writer is indebted to The Optical Society of America, Washington, for permission to use material from the Journal Applied Optics; to Heyden & Son Ltd, London, for permission to use material from their Journal X-ray Spectrometry; and to Dr. H.B. Porter, Editor of The Living Church, Milwaukee, USA, for providing copies of material from his Journal and for permission to extract short items from it. Acknowledgement is also made to the Centro Internazionale Di Sindonologia, Turin, for providing copies of their Journal Sindon, which is devoted to work on the Shroud. Gratitude must also be expressed to Don Lynn, Jet Propulsion Laboratory (Image Processing), to S.F. Pellicori, Santa Barbara Research Centre, Goleta, California, to Rev. Adam J. Otterbein, President of the Holy Shroud Guild, New York, to David Sox, formerly of the British Society for the Turin Shroud, and to Hughes Aircraft Company, California. Lastly acknowledgement is made to your Editor for suggesting this fascinating subject which involves so many scientific disciplines.

References

- D. Crispino, 1204: 'Deadlock or Springboard?' Sindone, Vol. 22, p. 24, December 1980.
- I. Wilson, The Shroud of Turin: The Burial Cloth of Jesus Christ?, Doubleday & Co., New York, 1978.
- R.H. Dinegar, The Turin Shroud', The Living Church, Milwaukee, USA, Vol. 180, No. 6, p. 9, February 10 1980.
- P. Jackson et al, 'The three-dimensional image on Jesus's Burial Cloth', in *Proc.* 1977 U.S. Conf. of Research on the Turin Shroud, Holy Shroud Guild, New York, 1977.
- E. Jumper et al, The Numismatist, 1349, July 1978.
- K.F. Weaver, 'The Mystery of the Shroud', National Geographic, Vol. 157, No. 6, p. 729, June 1980.
- S.F. Pellicori, 'Spectral properties of the Shroud of Turin', Applied Optics, Vol. 19, No. 12, p. 1913, June 15 1980.
- R.H. Dinegar, 'Operation STURP', The Living Church, Milwaukee, USA, Vol. 178, No. 9, p. 9. March 4 1979.
- E.J. Jumper and R.W. Mottern, 'Scientific Investigation of the Shroud of Turin', Applied Optics, Vol. 19, No. 12, 1909, June 15 1980.
- 10. J. Hanlon, 'Christ under the Microscope', New Scientist, Vol. 80, No. 1124, p. 96, October 12
- R.A. Morris, L.A. Schwalbe and J.R. London, 'X-Ray Fluorescence Investigation of the Shroud of Turin', X-Ray Spectrometry, Vol. 9, No. 2, p. 40, 1980.
- R. Gilbert, Jr. and M.M. Gilbert, 'Ultraviolet-visible reflectance and fluorescence spectra of the Shroud of Turin', Applied Optics, Vol. 19, No. 12, p. 1930, June 15 1980
- J.S. Accetta and J.S. Baumgart, 'Infrared reflectance spectroscopy and thermographic investigations of the Shroud of Turin', *Applied Optics*, Vol. 19, No. 12, p. 1921, June 15 1980.
- J.H. Heller and A.D. Adler, 'Blood on the Shroud of Turin', Applied Optics, Vol. 19, No. 16, p. 2742, August 1980.
- S. Pellicori and M.S. Evans, 'The Shroud of Turin Through the Microscope', Archaeology, pages 34-43, January/February, 1981.

Further reference material Books (see also references 2 and 4)

P. Barbet, A Doctor at Calvary, Image Books, Doubleday & Co, New York, 1963.

T. Humber, *The Sacred Shroud*, Pocket Books, New York, 1978.

P. Rinaldi, *The Man in the Shroud*, Futura Publications, London, 1978.

R. Wilcox, Shroud, McMillan and Co, New York, 1977.

P. Rinaldi, When Millions Saw the Shroud, Don Bosco Publications, 1980.

P. Jennings, Face to Face with the Turin Shroud, British Society for the Turin Shroud, London, 1978. (A series of six articles.)

Other material

The Silent Witness, Screenpro Films, 4 Meard St, London W1V 3HQ. A 55-minute film giving a good summary of what was known around 1977. Available as 16 mm film for rental or purchase and as video cassette.

The Holy Shroud, Don Bosco Films, 148 Main St, New York 10802. A 35 mm film strip or set of 35 mm slides.

The 1978 Exposition of the Shroud of Turin, Rev. F. Filas, Loyola University, Chicago. A documentary filmstrip with cassette commentary covering the 1978 public viewing and the scientific investigations. (From ACTA Foundation, 4848 N. Clark St, Chicago 60640.)

Photographs: Barrie Schwortz Studios, 310 E. Haley Street, Santa Barbara, California 93101.

SOLAR PANELS SPECIAL OFFER **TO READERS** OF ETI.

AMTEX ELECTRONICS, solar energy specialists, have available a number of mil-spec. solar panels that they are willing to offer to readers of ETI at a special price. These panels, type MB 4310, were manufactured by Sensor Technology (now called Photowatt International Inc.) for a military order and have the characteristics listed below:

ELECTRICAL DATA

Circuitry: 51 cells of 75 mm dia. connected in series with

dual, independent connections

Voltage at peak power: Current at peak power: 1.2 A

Peak power output: 24 Watt (Measured at a light intensity of

100 mW/cm² and 24°C)

Electrical insulation to substrate:

2000 Vdc minimum

MECHANICAL DATA

Nominal outside dimensions: 1220 x 290 x 22 mm Nominal weight:

Hail storm: Hailstones up to 30 mm dia

Wind loading: 190 km/h Storage temperature: -40 to +80 °C



SPECIAL PRICE — \$399

(plus \$10 freight and packing)

This price includes waterproof connector sockets. There are only a limited number of panels, so be early. Offer closes 29 May, 1981.

NOTE: This offer is made by Amtex Electronics and ETI is acting as a clearing house for orders only. Cheques should be made payable to Amtex Solar Panel Offer and sent to "Solar Panel Offer", ETI Magazine, 15 Boundary St, Rushcutters Bay NSW 2011. We will then process your order and pass it on to Amtex, who will send you the goods. Please allow up to four weeks for delivery. Offer expires on 29 May, 1981.

Please supply panels, type MB 4310	0.
I enclose \$ plus \$10 each freight and packin	
TOTAL\$	
Name	
Address	1
Postcode	
Cheque or money order	
Signature	
Please allow up to four weeks for delivery.	

Forging new frontiers in speaker performance

Richard Allan

top quality English speakers now available

*New Release: -

*CG 12L HI-FI Bass driver lightweight cone for better transient and frequency response.

Also available HP 12B Super, HP 8B, CG 12 Super. New stocks of Richard Allan speakers soon to arrive. Professional advice on all facets of speaker design and construction available. Come and inspect our unique experimental speaker design facility.

The ACOUSTIC

56 King William Road, Goodwood 5034

(08) 2710276.
Please forward me further details on Richard Allan speakers. (Trade enquiries also welcome).
NAME
ADDRESS
POSTCODE

UHF to VHF TV converter

This project will convert TV station transmissions in the UHF band down to unoccupied channels in the VHF TV band. If your present TV set does not have a UHF tuner and you want to watch programmes on UHF, this project is for you.

Phil Wait


SINCE THE introduction of UHF TV services — first the translator services re-radiating the VHF station signals on UHF channels and then the multicultural service on channel 28 - the number of stations and service areas has grown at quite a rapid rate. It's no wonder that we have received many calls and letters from readers asking for projects to solve problems they had in trying to explore what the new services offered. We have already published an antenna design (ETI-728, March '81 issue) and a masthead amplifier (ETI-729, April '81 issue). However, these two projects only cater for those who own a TV receiver having a UHF tuner already built in. Judging from the deluge of requests following the antenna project in the March issue, it seems the biggest demand is for a UHFto-VHF TV converter. We trust this project satisfies that demand.

Design philosophy

The predominant design requirement for this project was simple construction and a minimum of alignment. We judged that most constructors tackling a project such as this would not be familiar with UHF circuit techniques. Consequently, the design had to be simple, yet provide good performance—at least as good as the front end of UHF TV tuners used in modern domestic TV sets. We feel those aims have been achieved.

To reduce the requirement of alignment, there is only one adjustment—setting the local oscillator. That isn't even necessary in the tuneable version!

Before proceeding, we should explain that this project can be built in two versions: the *single channel* version and the *tuneable* version. Each has its advantages. If you only have a single UHF channel available in your area, and it's likely to remain that way for some time, then the single channel converter is the one you want. If you have several UHF channels available, then you can either make several single channel converters

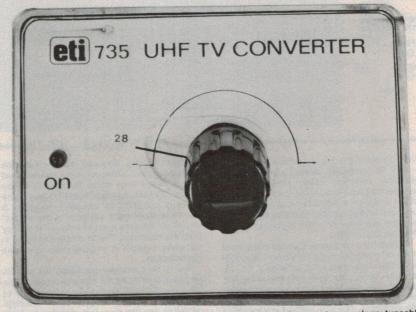

Front panel view of the tuneable version of our UHF converter. Note there are two versions: tuneable and single channel.


and set them up for the different channels, switching between converters, or you can make the tuneable version. If you only have one channel available currently and make a single channel converter, and then more channels become available later, the single channel converter is readily modified to the tuneable version.

The circuit arrangement is fairly conventional. An RF stage employing an OM350 hybrid wideband IC provides some 17-18 dB of gain before signal is applied to the mixer. A two-stage highpass filter employed between the antenna and the RF amp input provides over 20 dB of attenuation to prevent crossmodulation problems from the high-powered VHF TV signals and other transmissions below 450 MHz. For the mixer, we chose to use a ringdiode balanced mixer circuit, employing wideband input and output matching transformers. This type of mixer provides low noise operation with good crossmodulation performance. In addition, the wideband input and output transformers do away with the

necessity of having tuned circuits which require alignment. The ability to choose any convenient output channel is another advantage.

The local oscillator employs a FET in the familiar Hartley circuit. A parallel-tuned circuit is connected between the gate of the FET and common (ground). The drain is bypassed at the operating frequency and the source is tapped up to the tuned circuit's inductance to provide positive feedback. The tuned circuit inductance (L3) is realised by a length of track on the pc board and a small, low-value trimmer provides the tuning capacitance (CV1). Injection to the LO port of the mixer is provided by inductive coupling from L3 and a short length of 50 ohm stripline.

The pc board is double-sided to provide a groundplane area for the UHF circuitry. Output to the VHF TV receiver input can be either 75 ohm unbalanced (via coax) or 300 ohm (via ribbon). A regulated power supply is provided on board and the converter may be powered from a 12 Vac, 500 mA plugpack or a conventional trans-

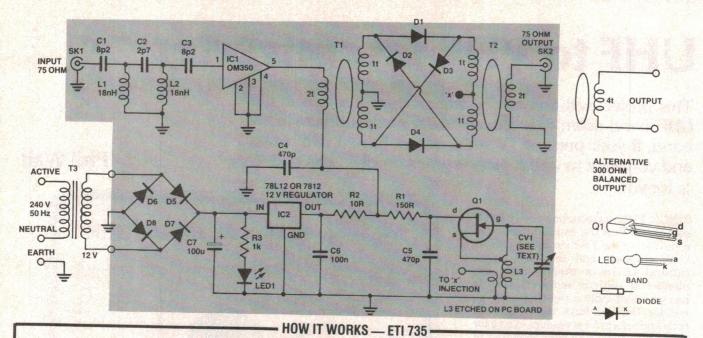

The converter's format is quite conventional

— an RF amplifier drives a mixer, local
oscillator injection being provided by a
variable frequency oscillator, the frequency of
which is set by a small variable capacitor. A
full-wave bridge rectifier followed by a threeterminal regulator provides regulated 12 Vdc

to power the circuitry.

Signals from the antenna are fed to the input of the RF amplifier stage via a two-stage highpass filter consisting of L1, L2 and C1, C2, C3. This filter attenuates strong signals in the VHF band (below 300 MHz) from overloading the converter and possibly causing crossmodulation problems. The UHF signals are amplified by IC1, a hybrid wideband amplifier chip which provides a gain of about 18 dB over a bandwidth extending from 40 MHz to 860 MHz. The input filter provides around 10 dB attenuation at 300 MHz, around 20 dB at 200 MHz, and more below that. The gain of the amplifier stage is around 15-16 dB across UHF Band IV and around 17-18 dB across UHF Band V. The gain falls off rapidly above 900 MHz. Noise figure is in the region of 6-7 dB, which is quite a bit better than many commercial UHF TV tuners!

The input and output impedances of the OM350 RF amp IC are quoted as 75 ohms, which is convenient.

The output of the RF amplifier is coupled into the mixer via the primary winding of T1.

The mixer employs four Shottky hot-carrier diodes (D1 to D4) in a double-balanced ring mixer circuit. The input and output transformers, T1 and T2 respectively, are wideband types, providing input and output impedance matching. No alignment is necessary — which is one of the reasons we used this type of mixer. The local oscillator injection is applied at point 'x' (the LO port). This type of mixer provides good conversion efficiency, few spurious outputs and has good strong signal performance so that problems with overload and crossmodulation are minimised.

The local oscillator employs a junction FET, Q1, in a Hartley oscillator circuit. This circuit is simple and reliable. The tuned circuit consists of CV1 and L3. The latter is a length of track on the pc board, a 'printed inductor'. Q1 is operated in the common drain mode, positive

feedback being obtained by tapping the source across L3. The oscillator can be tuned over a range from about 250 MHz to a little above 600 MHz. Injection to the LO port of the mixer is obtained by inductive coupling. A short length of track adjacent to the 'earthy' end of L3 couples a small amount of energy from the oscillator. This is coupled to point 'x' via a short length of stripline running across the pc board.

The mixing process combines the signals amplified by IC1 and the signal provided by the local oscillator to produce a whole range of 'products' at the output. The principal products are the sum and difference of the input and local oscillator frequencies.

Say the input frequency we want to receive is 526 MHz (lower edge of channel 28). This will be amplified by IC1, along with all the other frequencies passed by the input filter, and applied to the input of the mixer. If we set the local oscillator to 470 MHz, the mixer output will be:

526 - 470 MHz = 56 MHz

This is VHF TV channel 1. If we tune the TV receiver to channel 1, we will be able to receive UHF channel 28. However, the sum of the input and local oscillator frequencies will also result from the mixing process:

526 + 470 MHz = 996 MHz

But the TV receiver will not respond to such a high frequency. A signal from UHF channel 50 (694-701 MHz) may appear at the output too:

694 - 470 MHz = 224 MHz

But that's outside the range of the VHF TV receiver. If we set the TV receiver to channel 6 (174-181 MHz), we will be able to receive channel 50 by setting the converter's local oscillator to 520 MHz.

Reception of a UHF station can also be obtained with this converter design by tuning the local oscillator above the channel frequency. For example, to receive channel 28, which occupies 526-533 MHz, assuming we have the TV receiver set on channel 1, the converter local oscillator should be set to 589 MHz:

589 - 533 MHz = 56 MHz.

But, if there is a signal 56 MHz above the local oscillator frequency (otherwise known as the 'image' frequency), i.e: 589 + 56 MHz =

645 MHz (UHF channel 43), it will be received equally well — and you'll have terrible interference if there's a station on that channel! With this converter, and the current arrangement of channel allocations, it is best to tune in a station with the oscillator set on the low frequency side of the desired channel. In addition, it is best to use channel 1 (or an adjacent unused channel) to receive UHF stations in Band IV (520-580 MHz) and an unused channel between 5A and 11 to receive UHF stations in Band V.


Power is provided by a full-wave bridge rectifier involving diodes D5 to D8, input being derived from a 12 Vac (nominal) source. An indicator LED (LED1) is driven from the output of the rectifier. Capacitor C7 is the rectifier smoothing capacitor. A three-terminal regulator, IC2, employing either a 78L12 or 7812. provides a regulated 12 Vdc supply for the RF amp, IC1, and the oscillator FET, Q1. The regulated supply ensures good oscillator stability. Capacitor C6 bypasses the output of the regulator, IC2, and prevents it bursting into HF oscillation. Resistor R2 prevents interaction between IC1 and IC2 at low frequencies, and C4 provides an RF bypass for the supply rail to IC1, which goes to the output pin (pin 5) via the primary of T1.

RF bypassing for the drain of Q1 is achieved by C5, and the power supply rail is decoupled via R1.

The output impedance of the mixer can be matched to an unbalanced 75 ohm load or to a balanced 300 ohm load by having a different secondary wound on T2. The impedance transformation ratio provided between the primary of T1 and the secondary of T2 will depend on the square of the ratio of their turns. With two turns on the primary of T1 and two turns on the secondary of T2, the impedance transformation will be 1:1. In this instance, one side of the secondary of T2 is grounded to provide an unbalanced output to match coax cable. If the secondary of T2 is wound with four turns, the output impedance will be given by:

 $75(4/2)^2 = 75 \times 4$ = 300 ohms

Thus, four turns on the secondary of T2 will provide a balanced match to 300 ohms.

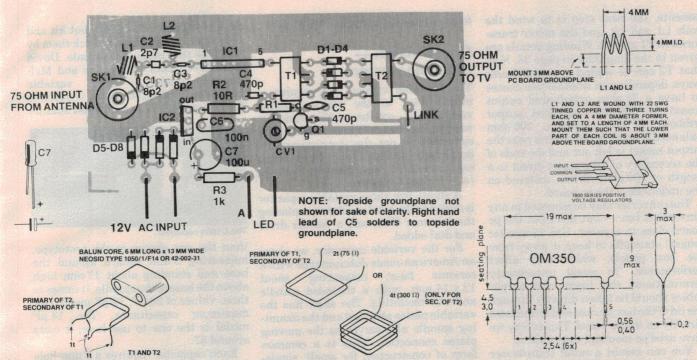

former. Overall gain is around 12 dB and the noise figure is around 6-7 dB. This sort of performance is more than adequate for normal service reception of UHF transmissions.

No doubt some readers are curious as to why we didn't design a tuner employing voltage tuned varicaps to tune the local oscillator and/or RF tuned circuits. Firstly, suitable varicaps having the required characteristics for these frequencies were not readily available. We did experiment with a few types that were available, as well as with some common high frequency silicon diodes, but results were very poor owing to the low Q and high losses of the components. Hence, we opted for the circuit design described here.

Construction single channel version

single channel version first. The tunemodification of the single channel

The converter is constructed on a double-sided pc board having a fibre-The top side is predominantly copper, which serves as a groundplane, small areas being etched away where components pass through from the top to the converter fits on to the one pc board, body of the component, ruining it. including the rectifier and power supply

regulator components.

Construction is best commenced by mounting all the minor components. Leave the input and output sockets, coils and mixer transformers until All components should be mounted with the absolute minimum lead length. Press them hard down on the board. However, the input high pass filter coils, L1 and L2, are mounted about 3 mm above the board, to avoid the groundplane dampening their Q.

A number of components are soldered on both the top and the bottom sides of the board. These are: the anodes of D6 and D8 (in the rectifier), one lead of C4, plus the earth stake, the centre-tap connection of T1, the earth end of the output link (for 75 ohm output) and the earth ends of L1 and L2.

The OM350 RF amplifier IC must be seated hard down on the board, as should Q1 and the mixer diodes D1 to We shall describe the construction of the D4. Watch the orientation of the semiconductors and the rectifier filter able version is actually just a capacitor, C7. Note that the OM350 can only be inserted one way, but the local oscillator FET, Q1, has its source lead the centre one — offset from the others. This lead must be bent over so that the glass substrate. A phenolic substrate FET can be inserted the right way board will not work in this application. round. This is necessary to give the correct length of track on the board for the source feedback tap on L3 - which is a printed circuit inductor.

Take care when soldering CV1 in bottom side tracks. The complete place as conducted heat can distort the

Having mounted the minor com-▶

PARTS LIST — ETI 735

	PARTS LIST — ETT 730				
R1 .	ors a	50R			
R2 .		OR k			
out a	itors	n along time quadrat			
C1. 0	23 8	3p2 ceramic NPO			
C2		2p7 ceramic NPO			
C4, (05 4	170p ceramic			
C6		100n greencap 100u/16 V electrolytic			
CV1		2-18p miniature film			
(see	text) t	rimmer			
(000	(OR			
10000		2-15p miniature air			
1 200 1		rimmer with 4.8 mm			
北京	Sales Sales	(3/16") shaft.			
	onductors	a posta menera dala			
D1-[5082-2800 (four-off) or matched set of			
		5082-2804 Hewlett			
		Packard hot carrier			
		diodes			
D5-I		1N4001, 1N4002 etc or			
1 04		similar 2N5245 FET (no			
Q1		substitutes)			
IC1		OM350 Philips wideband			
		amp IC			
IC2		78L12 or 7812, 12 V			
1.55	01	three-terminal regulator. TIL220R or any suitable			
LEL)	LED.			
Misce	ellaneous				
SK	1, SK2	Belling & Lee pc-mount			
		coax sockets			
L1,	L2	see text and diagrams see text and diagrams			
T3		12 Vac. 500 mA plugpack			
ETI	-735 no board	(double-sided, fibreglass			
nec	ressary): no boa	rd stakes: tinned copper			
wire	e; nookup wire; \	vernier drive (for tuneable 4.8 mm shaft reducer (for			
tun	eable version); bo	ox to suit.			

Project 735

ponents, the next step is to wind the coils L1 and L2, and the mixer transformers T1 and T2. Winding details are given in the diagrams on page 38. Note that T2 can be wound in two different ways, depending on whether you choose to have a 75 ohm unbalanced output (coax) or 300 ohm balanced output (ribbon). If you choose a 300 ohm balanced output, the small link near the output socket is left out and the ends of the secondary of T2 connect direct to a length of 300 ohm ribbon, soldered on the underside of the pc board.

The converter may be mounted in any convenient box — but don't put the pc board close to a panel. Use 12 mm (or longer) standoffs to keep it away from the box panels, which may affect performance. To avoid unnecessary terminations, the input and output cables should be taken directly through the lid of the box you use and terminated directly on the pc board. This is why we have used pc-mounted coax sockets.

You can mount a small transformer in the box to power the converter, or you can use a plugpack. The transformer or plugpack should have an output of 12 Vac, rated at about 500 mA. Transformers and plugpacks with this rating are cheap and quite common. While the converter doesn't draw anything like 200 mA, the rectifier output must be several volts above the three-terminal regulator's output voltage. As less than full load is drawn from the transformer or plugpack, its output will be high enough to meet this requirement.

If you choose to use a plugpack, mount a suitable insulated two-pin socket on the box housing the converter. Dick Smith stores stock a suitable ac plugpack, catalogue number M-9555, while Ferguson market a plugpack designed

to power doorbells, model PPB 12/500.


Construction — tuneable version

The tuneable version just requires a modification to the single channel version. To construct the tuneable version, commence by constructing the converter as per the instructions just described, but leave out the trimmer capacitor CV1 (not needed) and Q1 (which must be inserted later).

A small, low value variable capacitor is added to the local oscillator, replacing the trimmer CV1, and a vernier drive and dial added.

For the variable capacitor, we chose an American-made Johnson type with a ceramic base, measuring 12 x 14 mm, with a threaded spindle and nut mounting. The shaft has the variable plates attached and the mounting spindle also serves as the moving plates connection. This is a common form of construction for small, singlegang variable capacitors for those readers who are not familiar with the beasts. The type we chose to use in the prototype has the moving plates and the fixed plates each milled out of a brass block, which provides excellent mechanical and electrical stability. These capacitors are available in different values and we recommend you use one with a maximum capacitance of 15 pF. The exact one we wanted was not available when we constructed the prototype so we used one with a maximum capacitance of 20 pF and cut down the fixed plates to obtain the required value. This is visible in the close-up photographs. We purchased ours from General Electronic Services Pty Ltd of 99 Alexander

St, Crows Nest NSW 2065, but kit and component suppliers may stock them by the time this issue goes on sale. David Reid Electronics (in Sydney and Melbourne) stock a small variable capacitor, type C1604, that is suitable for this project. It is somewhat smaller



The C1604 capacitor.


than the one shown in the prototype, measuring 9 mm square around the base and standing about 17 mm high above the base of the spindle. It comes in three values of 20 pF, 14 pF and 8.5 pF maximum capacitance. The 14 pF model is the one to use here; it costs around \$7.

Each capacitor requires a 6 mm hole to be drilled in the pc board for the spindle. This is drilled through the pc board adjacent to the end of the local oscillator inductor strip (L3), the hole centre being spaced about 9 or 10 mm from the pad at the very end of L3. The capacitor from David Reid Electronics (C1604) could be placed a little closer if you wish. Whichever capacitor you use, it must clear adjacent components. The main requirement is to place the solder tag for the fixed plates connection above the pc board hole for the gate of the local oscillator FET, Q1.

When securing the variable capacitor to the pc board, make sure the nut gets a good grip so that the shaft and spindle are well connected to the groundplanes on the top and bottom of the board. Ensure that the areas of copper on the board surrounding the spindle hole are clean and bright before installing the

capacitor.

With the capacitor installed, Q1 needs attention. The drain lead goes in the original hole (see the overlay), but the source lead now goes in the hole where the gate lead went on the single channel version (again, refer to the overlay). Now, pass a short length of tinned copper wire through the hole in the pad on the very end of the local oscillator inductor strip (L3), up to the lug connecting to the fixed plates on the variable capacitor. Solder the wire to the board, then bend the lug on the capacitor down towards the board and solder the free end of the wire to the lug. Take the gate lead of Q1, bend it towards the capacitor lug and solder it in

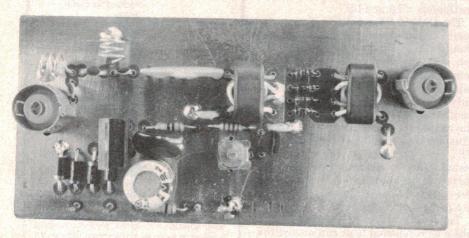


The completed single-channel converter. Topside of the board is largely copper with 'let-outs' where components pass through. Input is on the left, output at right.

uhf tv converter

place. The one thing to remember here is to keep all leads as short as possible. The accompanying close-up photograph shows how we did it.

The converter may now be mounted in a box, so that the vernier drive and dial can be installed. The vernier drive we used is a Jackson dual-ratio type having a 2:1 and a 6:1 action. This is designed to couple to a 6 mm (¼") diameter shaft. The Johnson capacitor specified has a 4.8 mm (3/16") diameter shaft, while the C1604 capacitor from David Reid Electronics has a 4 mm diameter shaft. You will need an appropriate split-tube shaft reducer to slip over the capacitor's shaft, depending on which particular type you are using.

We mounted our tuner in a small Horwood box, type 34/6/D. This consists of an aluminium extrusion 100 mm wide by 75 mm high and 75 mm deep with a panel in each end secured by selftapping screws. The converter and dial mechanism are secured to one end panel and the RF input/output and power supply cables are passed through holes in the other. Drilling details to mount the converter and dial mechanism are drawings below. given in the The pc board is secured to the front panel by four 38 mm long (11/2") 6 B.A. bolts, while the vernier dial drive mechanism is mounted using two 25 mm long (1") 6 B.A. bolts. All six bolts have countersunk heads to permit the front panel transfer (such as Scotchcal) to sit flat on the panel. General construction is visible from the photographs here. The best way to go about the mechanical assembly is as follows: first, carefully mark out and drill the front panel as per our detail drawing. Secure all six bolts to the

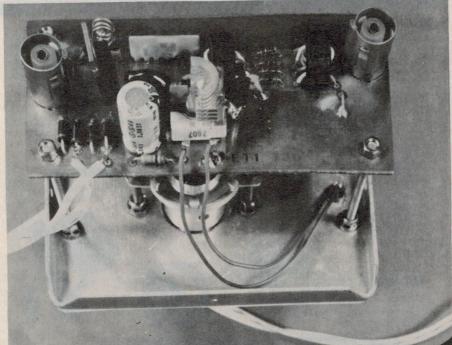

The completed tuneable version showing how we mounted the board and dial mechanism.

panel using washers under each nut. Thread another nut on each bolt. Slip the vernier drive over its two mounting bolts and position the two nuts such that the mounting lugs of the drive are about 15 mm from the panel. Secure the drive mechanism with two more nuts and washers, making sure the drive shaft passes through the panel at a right angle otherwise your dial pointer will not move parallel to the front panel.


Now, slip the shaft reducer over the shaft of the variable capacitor. Assemble the pc board onto the mounting bolts and position the nuts on each bolt so that the board is about 32 or 33 mm from the panel. The capacitor

shaft should line up with the drive coupling. Don't secure the board yet. Tighten the grub screws on the drive coupling to secure the capacitor shaft. Now you can secure the board with four more nuts.

Before you assemble the dial pointer mechanism to the vernier drive, fix the indicator LED in place and then attach the panel artwork. We used a Scotchcal panel, but only general markings are shown, as the exact channel positions (or frequency markings) will depend on which VHF channel you select as the converter's output. With the panel artwork in place you can assemble the dial pointer mechanism to the vernier drive.



Close-up of the FET and tuning capacitor in the tuneable converter, showing where the capacitor is mounted and how the FET's gate lead is bent over to the capacitor's lug. The source lead now goes in the original gate hole.

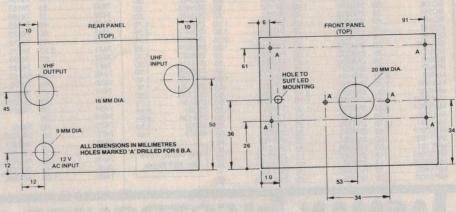

Panel drilling details for the Horwood box in which we housed the tuneable converter.

TRANSFORMERS

Made in Australia to Australian standards for 240V, 50Hz mains with secondaries from 1.5V to 115V

CONVENTIONAL

Rated from 2.5 to 350VA



MICROPROCESSOR

Specially produced with 8V main secondaries and 12-15V dual auxiliary secondaries. Outputs from 200mA to 10A. Also Computer Line Conditioners.



Includes step down transformers for 115V equipment, soldering irons, mains isolation etc.



20, 40 & 60VA ratings with dual secondaries for various output voltage and current combinations. Also multitap 20VA version. Compact design.

POWER POINT ADAPTORS

Available in AC and DC versions with outputs to 6VA AC or 4VA raw DC or 3VA filtered.



P.C.B. MOUNTED

Pins located at standard 0.1" PCB grid: Ratings from 2.5 to 15VA with dual secondaries.





.1.90 .90 1.30 1.15 1.00 1.20 1.60 1.60 1.50 .1.95 ..8575 ...95 ..80 .80 ..90 .65 .2.40

POWER SUPPLIES

Fixed regulated 13.8V DC supplies, variable 0-35V DC with current limiting. Battery Chargers up to 20A.



=[FERGUSON]=

Send for data sheets and rating selection guide.

FERGUSON TRANSFORMERS PTY LTD
331 High Street, Chatswood 2067 Tel: (02) 407 0261

TRANSISTORS

	INA	145	01010		Panana are the
AC1289	0 MPSA12	50	BC639	40	2N2484
AD1492.20	MPSA14	45	BC640	40	2N26461.00
AD1612.20	MPSA55	30	BCY71	40	2N26471.20
AD1622.2	0 MPSA92	40	BCY72	09	2N2904
BC1073!	5 MPSA93	55	BD131	00	202904
BC108	5 PN3564	24	BD139	00	2N290550
BC108C39	PN3565	18	BD140	00	2N2905A50
BC1093	5 PN3566	18	BD234	1.00	2N2906A50
BC109C40	PN3567	18	BD262	1.00	
BC1773	5 PN3568A	18	BD263	1.20	
BC177B65	PN3638	18	BD647	1.20	2N3013.75
BC17835	5 PN3641	20	BD648	1.90	2N305375
BC17935	PN3642	20	BDV64B	1.90	2N30541.85
BC182B20	PN3643	20	PDV65B	3.19	2N305575
BC184L25	PN3644	22	BDV65B	3.19	2N31071.20
BC212L25	PN3645	22	BF115	55	2N330085
BC28616	PN3646	22	BF167	95	2N330260
BC28716	PN3693	20	BF173	95	2N363825
BC31722	PN3694	20	BF180	85	2N364230
BC31822	PN4121	29	BF338	90	2N521050
BC31922	PN4248	35	BF469	1.00	2N54011.15
BC32022	2N3702	20	BF470	1.00	2N545850
BC32730	2N3703	20	BF494	22	2N545955
BC33730	2N3704	30	BFW10 BFX84	1.40	2N546190
BC33830	2N3740	1.60	BFY50	85	2N546290
BC546 24	2N3810		BFY51	85	2N548565
BC54719	2N3904	25	BFY90	1.50	2N555090
BC54819	2N3906	20	BU126	1.50	2N58711.70
BC54919	2N4030	1.00	BUX80	0.05	2N58722.25 2N58731.70
BC549C20	2N4032	80	FPT100	1.00	2N58741.85
BC55025	2N4033	1.00	PN4250	1.20	2N60271.10
BC55624	2N4036	1 20	PN4355	20	2N61241.20
BC55720	2N4037	1.30	TIP31A	29	2N61261.30
MJ8024.20	2N4124	28	TIP31C	1.60	2N61291.40
MJ29551.10	2N4231	1 20	TIP32C	1.00	2N61301.30
MJ45024.20	2N4234	2 10	TIP2955	1.60	2N61321.60
MJ150035.90	2N4235	1 70	TIP3055	1.00	2N61341.70
MJ150045.90	2N4238	1.90	TT800	1 20	2SJ498.95
MJE3401.30	2N4403	20	TT801	1 20	2SK1348.95
MJE3502.10	2N4870	1 25	2N697	60	3N2011.60
MJE29551.49	2N5086	25	2N918	65	406731.40
MPF10260	2N5087	25	2N2102	82	1.40
MPF1311.20	2N5088	30	2N2219	50	
MPS356518	2N5089	25	2N2219A	65	Mail Orders, \$1.00
MPS363818	BC558	20	2N2222A	35	Min. P&P Please.
MPSA05 30	BC558B	20	2N2368	25	rai ricase.
MPSA0630	BC559	20	2N2369A	65	
		CPLEX EVAL			

). 10 11 2			
7401	35	74831.40	74LS0830	74LS164
7402	35	74851.40	74LS0930	74LS165
7403	35	748655	74LS1030	
7404	35	74892.60	74LS1155	74LS169
7405	45	749060	74LS1230	74LS174
7406	50	749195	74LS1480	74LS175
7407	45	749280	74LS1575	74LS190
7408	35	749355	74LS1660	74LS191
7409	35	74941.15	74LS2030	74LS192
7410	35	74951.00	74LS2135	74LS193
7412	40	74961.10	74LS2730	74LS194
7413	50	741001.95	741.500	74LS195
7414	65	7410775	74LS2835 74LS3030	74LS196
7416	50	7412165	74LS3230	74LS197
7417	60	7412385	74LS3240	74LS221
7420	35	741321.30	74LS3840	74LS247
7421	35	741451.50	74LS4030	74LS251
7422	35	741501.50	741.54030	74LS253.
7425	45	741511.40	74LS4245 74LS471.20	74LS257.
7426	40	741531.40	74LS7360	74LS259.
7427	40	741541.40	74LS7440	74LS279.
7430	35	741571.40	74LS7550	74LS290.
7432	35	741601.70	74LS7865	74LS365. 74LS366.
7437	40	741651.70	74LS851.40	74LS366.
7438	45	741721.40	74LS8660	74LS368.
7440	45	741732.60	74LS9060	74LS373
7441	2.50	741751.20	74LS921.00	74L3373
7442	80	741801.50	74LS9385	
7447	1.00	741921.80	74LS951.00	
7448	1.00	741931.80	74LS10765	
7450	45	741761.50	74LS10950	
7451	45	7436780	74LS11350	
7453	35	74S0275	74LS11475	
7454	50	74S741.40	74LS1231.50	
7460	35		74LS12570	
7470	50	74LS.	74LS13330	
7472	55	74LS0033	74LS1381.10	
7473	55	74LS0130	74LS1511.00	
7474	55	74LS0230	74LS15560	
7475		74LS0330	74LS15775	
7476		74LS0440	74LS16070	
7480	1.00	74LS0550	74LS16380	

ASMAN ELECTRONICS

12 Victoria Street, Coburg, VIC, 3058. Phone (03) 354-5062.

uhf tv converter

We cut a piece of 3 mm thick perspex to shape and put a line on it with black ink.

The rear panel of the box has three holes drilled in it, two to pass the input and output cables and one, which is grommeted, to pass the power supply input lead. Pass the ac supply lead (length of figure-8 flex) through the grommeted hole and the input and output cables through the appropriate holes and then assemble the rear panel to the case. Wire up the ac supply to the pc board and you're ready to roll!

Setting up

Setting up the single-channel version is quite simple. We presume you already have an antenna (see the March issue). Install a short jumper cable from the converter's output to the TV receiver's input. Attach the ac power source to the converter (plugpack or what-have-you), plug in your UHF antenna and switch on.

You will need to select an appropriate unused channel on your TV receiver. For UHF stations in Band IV (channels 28 to 34), VHF channel 1, or an adjacent unused channel, can be used. For Band V UHF stations (channels 38 to 63), select one of the higher VHF channels, such as channel 6 or 8.

First ensure your antenna is pointing in the right direction. Then, using an insulated alignment tool, adjust CV1

for best reception on the UHF channel you want to receive. Start with CV1 set at maximum capacitance so that the local oscillator frequency is tuned upwards. It is possible to tune Band IV stations by setting the local oscillator above the channel of interest, but this is not recommended as it may be possible to experience interference from stations on the 'image' frequency. For example, say you have chosen VHF channel 1 (56 MHz) as the converter output frequency. You can receive UHF channel 28 by setting the local oscillator to 470 MHz (526 - 56 MHz). You can also receive channel 28 by setting the local oscillator to 589 MHz. However, a station on 645 MHz (channel 43) may be received equally well. This channel is not occupied at the moment, though.

Setting up the tuneable version is very similar. First, set the dial to the lowest frequency (capacitor plates fully meshed). Attach the antenna and jumper cables and the ac power input from the plugpack, and power up. For the tuneable version, one of the higher frequency VHF channels should be selected on your TV receiver. If you want to go right up to UHF channel 63, you'll have to use VHF channel 11, as the converter's local oscillator in the tuneable version does not go above 600 MHz as it does in the single channel version.


With everything set up, rotate the dial until you obtain good reception of the station of interest. Dial positions of channels can be noted on the panel with a Chinagraph pencil and the channel number put on later with rub-down lettering such as Letraset.


If you find you need to improve reception, experiment with the position and direction of the antenna. If necessary, further improvement can be obtained by using a masthead amplifier, such as our ETI-729, published in the April issue.


Amateur TV use

The converter is eminently suited to amateur TV applications in the 420-450 MHz (70 cm) amateur band. Two 'channels' are used: 425-432 MHz (vision carrier on 426.25 MHz) and 443-450 MHz (vision carrier 444.25 MHz). The local oscillator range in this converter is more than adequate to cover these two frequency bands, set to either the 'high side' or the 'low side'. However, the input high-pass filter will require some modification. This is simple - squeeze both coils until they're just under 3 mm long! This will bring up the gain around 400 MHz and still provide a reasonable roll-off below 250 MHz to attenuate the strong VHF TV station signals that may bring crossmodulation problems.

Full-size artwork for the front and rear sides of the pc board. Take care to place them the right way round and align them when exposing the resist.

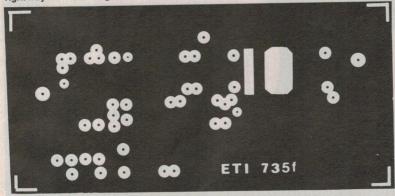

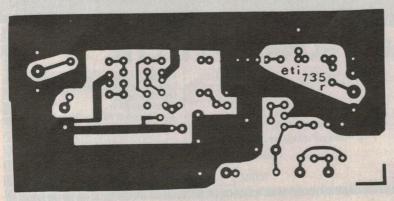

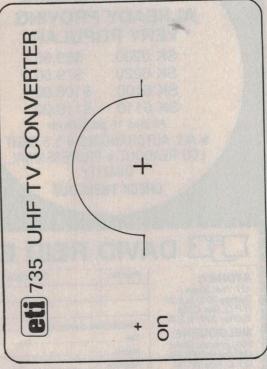

Full-size artwork of the front panel for the tuneable

"MEMORY" **SPECIALS**

4116's 200ns \$23 for 10 \$2.50 each 2114's LP \$32 for 10 \$3.57 each 2114's LP3 \$34 for 10 \$3.88 each 2716's \$90.00 for 10 \$10.09 each ALL INCLUDING TAX

GREAT MAY SPECIAL QUALITY ELECTRIC CAR AERIALS

ONLY

\$14.95

SAVE \$10.00

WINTER NIGHTS WITH "ATARI" TV GAMES GREAT FAMILY ENTERTAINMENT FOR \$269.00

(INCLUDES "COMBAT" GAME) FULL RANGE OF GAME CARTRIDGES AVAILABLE — "SPACE INVADERS" "INDY 500", "VIDEO CHESS", "ADVENTURE", "OUTLAW" PLUS MANY MORE

GET YOURS NOW

NEW "KAISE" DMMs ALREADY PROVING **VERY POPULAR**

SK 6200 \$69.50 SK 6220 \$79.50 SK 6100 \$108.00 SK 6110 \$118.00 All plus 15 percent tax

 ALL AUTORANGING
 3.5 DIGIT LCD READOUT • PROFESSIONAL QUALITY

CHECK THEM OUT

YES! WE'RE STOCKING IT BIFET OP. AMPS

TL061 73c TL075 \$2.63 TL064 \$2.87 TL080 57c TL071 90c TL081 63c TL072 \$1.51 TL082 \$1.32 TL074 \$1.95 TL084 \$2.42

WRITE NOW FOR FREE CATALOGUE **ALL INCLUDING** 15% S.T.

B DAVID REID ELECTRONICS PTY. LTD.

SYDNEY: 127 York Street Sydney 2000 N.S.W. G.P.O. Box Q103 Sydney 2001 N.S.W. MELBOURNE:

356 Lonsdale Street Melbourne 3000 Vic. G.P.O. Box 1417M Melbourne 3001 Vic.

Part No.	Description	Quantity	Price	Total
Please print cle Tel Name	early. Date	Minimum Postage/Pa Plus Postage/Packir		1.00
Àddress			Subtotal	
	Postcode		TOTAL	

Enclose your personal cheque, Money Order or Bankcard Numbers as specified below: Check and fill in Cheque or Money Order Enclosed

Charge to my Bankcard No. CARD HOLDER'S NUMBER 496

Signature Card Expiry Date

869 George Street, Sydney, NSW. 2000. (Near Harris Street) Phone 211-0816, 211-0191.

MAY **SPECIALS**

Transistors: BC237 or BC238
"Altronic" TI-302 soldering iron stand\$5.50
CSR-4 Cassette tane module rack
CA-30 Top Cowel car aerial — 42" ext\$4.75
"RALMAR" SDH-7D stereo headphones\$8.95
"VICTORY" MPT-02 colour TV game unit\$78.95
Extra cartridges for TV game\$18.95 ea.
Ni-Cad rechargeable AA Penlite Cell\$1.75
"MUFFIN" 240V computer fan\$22.94
"SPRITE" 240V computer fan
"LOTRING" 3212 soldering iron 30 watt\$12.30
"G.E." SC-151D Triac 400V 15A 1-9\$2.00 ea.
10 up\$1.61 ea.
10 up.:\\$1.01 da.
SC-40 twin speaker control unit\$2.50
"FERGUSON" PF2228 transformer, \$5.00
prime: 240V, sec: 30V-20VA\$5.00

See us for all types of valves We specialise in:

- PC Boards for ETI and EA projects.
- Scotchcal labels made under order for ETI and EA projects 1979 and onwards.

Texas Calculators

Texas Calculators					
	excl. ST	incl. ST			
Ti.59	\$271.29	\$302.00			
Ti.58C	\$141.11	\$156.00			
Ti PC 100C Printer	\$216.28	\$239.00			
Ti.50	\$37.05	\$41.00			
Ti.55	\$54.27	\$60.00			
Ti.30 Student Pack	\$20.13	\$22.50			
Little Professor	\$17.20	\$19.00			
Dataman	\$23.63	\$26.15			
Speak and Spell	\$69.53	\$77.00			
Ti 1750	\$16.72	\$18.50			
	\$41.48	\$45.92			
Ti BAII					

MAIL ORDER CUSTOMERS

MAIL ORDER COSTOMETIS	
	.\$1.00
Packing Minimum postage	\$1.00
Minimum postage	\$1 50
Minimum interstate postage	.φ1.σσ

OPEN: Mon-Fri 8 am to 5.30 pm. Thursday night late shopping till 8.30 pm. Saturday 8 am to 11.45 am.



THE ULTIMATE ANTENNAE FOR ANY RECEPTION DISTRIBUTION PROBLEM

NOW SOLE VIC. & S.A. DIST.



CHANNEL KING PTY. LTD.

117 Burwood Hwy Ferntree Gully Vic. 3156 (03) 758-5199



Best value Oscilloscope in '81

NOW AVAILABLE THROUGHOUT **AUSTRALIA**



- 130mm LABORATORY CRO
- 6.5MHz Bandwidth
- CRT Calibration

Specifications:

Vertical Deflection:

Sensitivity: 10mVp-p/cm or better Bandwidth, -3dB: DC: DC to 6.5 MHz;

AC: 2Hz to 6.5MHz Input Impedance: $1M\Omega^{\pm}5$ percent within 35PF Input Control: x1, x10, x100, and fine adjuster Calibration Voltage: 0.05Vp-p 1kHz square

wave Maximum Input Voltage: 600Vp-p or 300V

(DC + AC peak)

Horizontal Deflection:

Sensitivity: 250mVp-p/cm or better Bandwidth, -3dB: DC to 500kHz Input Impedance: 1M ººº 10 percent within 35PF Maximum Input Voltage: 100Vp-p or 50V

(DC + AC peak) Sweep Frequency: 10Hz to 100kHz in 4 steps with fine adjuster

Synchronization: Internal — & + , external, line. Power Supply: AC 240V/50Hz; approx. 15VA Size and Weight: 250(H) x 180(W) x 415(D)mm;

Accessories: Test leads and instruction manual.

OTHER GW INSTRUMENTS: Function/audio generators, DMM's, frequency meters, AC millivolt/milliohm meters, AF/RF attenuators, capacitance/leakage meters, puncture/ insulation testers, regulated power supplies.



Sole Australian Agent: **EMONA ENTERPRISES**

PTY. LTD. CBC Bank Bldg, 661 George Street, Haymarket, Sydney. (02) 212-4815.

UNBELIEVABLE PRICE BREAKTHROUGH Telephone Answering Machine \$1



Capture important calls WITHOUT returning to your office!



*With this optional remote beeper you can actually dial your number from any other phone & listen to any messages that have been recorded imagine how handy that would be for busy people on the move. You can capture important calls without having to go to the office

*Remote beeper available \$39.00

Direct import & latest microprocessor technology have halved the cost of telephone answering machines from

CK SMIT

Huge price breakthrough

Traditional telephone answering units are enormously complex and expensive. In this revolutionary unit most of the components have been replaced by one "microprocessor" (computer) integrated circuit which not only means greater reliability but also vast savings in cost. To purchase this unit outright you will probably spend less than one years lease payments on competitive units

NOT AS GOOD.

This unit has some tremendous advantages over competitive units however we must first tell you of one disadvantage. With competitive units selling for \$400-\$500 a sales representative will call, demonstrate and quote you. However, because of the extremely low price of this unit we can only sell it directly "over the counter" or by mail order. The profit we make wouldn't even run a traditional salesman's car for very far!

but far better

Many telephone answering units (including this one) can have remote beepers. This means that when you wish to retrieve a message, you simply 'phone your number, hold the beeper to the 'phone and the telephone answering machine then rewinds to the start of your first message and plays back. However, with most units if you then wanted to erase these messages and rewind, it was either impossible or extremely complicated. This unit solves the problem as you can command the machine to rewind from your beeper at any time.



easy to install

The telephone answering unit simply plugs into the power and connects to your telephone (Telecom install a socket at a nominal charge). We even supply instructions on how you can easily install it yourself in seconds where Telecom regulations do not apply.

incredibly small

Microprocessor technology has reduced the machine to $25.5 \times 15 \times 6$ cm. (your telephone sits on top perfectly) and the unit will record up to 45 messages on the standard cassette tape (many other machines have special tapes costing over \$20.00).

You don't have to pay for special tapes costing \$20 or more!

Features:

- All solid state non mechanical switches.
- Electronic cassette mechanism (patent pend).
- All functions computer controlled
- Acknowledges all commands.
- Messages received signal.
- "Fail safe" signal signals if you forget to insert cassette.
- Uses standard cassette.
- Supplied with pre-recorded cassette tape
 unit ready for immediate use.
- Supplied with microphone for personal recording of outgoing message.
- Computerised "Auto Record" just speak into the microphone and the computer does it all.
- Monitor allows undetected screening of callers.
- Skip mode automatically jumps to start of next message.
- No listening to outgoing message. Only hear the message received.
- Remote beeper allows you to listen to your messages from any telephone.
- Choice of keeping messages or resetting to fresh start, from any telephone.
- Unit has "No message received" signal on remote call-in.
- Last message received signal.
- Signal for tape fully recorded with incoming messages.
- Book size fits under your telephone.

no wasted time

With our unit there is a special beep tone that tells you the moment you call in if there's a message. It also tells you if you have finished listening to the last message.

This saves you time and money!

try it yourselfno obligation


We are so confident of this computer controlled marvel that we are happy for you to try it yourself for 14 days and if you are not completely satisfied, simply return it to us in its original condition and we will refund your money in full.

XK-2100 TELEPHONE ANSWERING



Cat. Y-2173 \$199 00 P&P \$5.50

OPTIONAL REMOTE



(Allows you to interrogate machine from another phone).

\$3900

Cat. Y-2174 P&P \$3.00

don't miss those important calls

TELECOM APPROVED (App. No: C80/16/92).

DICK SMITH ELECTRONICS



SEE OUR OTHER ADVERTS IN THIS MAGAZINE FOR OUR STORE ADDRESSES AND RESELLERS

Electronic humidity meter can double as a controller

Graeme Teesdale


This project can be built to give a readout of relative humidity either on a LED dot-mode display or a conventional meter. In addition it can be used with a following project as a controller to turn on and off a water mist spray in a hothouse, for example.

MEASURING environmental parameters such as temperature, wind speed and direction, etc, are relatively simple problems in electronics. But when it comes to humidity - or relative humidity - a stumbling block arises. The Bureau of Meteorology, and most other agencies or people interested in measuring relative humidity (Hrel.), employ wet bulb/dry bulb thermometer instruments and a conversion table. Attempts to emulate the wet bulb/dry bulb technique electronically have been tried, using thermistors, in the past but the technique has not met with a great deal of acceptance. It's "fiddly" and offers few advantages — other than a direct readout of relative humidity over the wet bulb/dry bulb method.

Now, doubtless many an electronics engineer and hobbyist has turned their mind to the problem of a suitable electronic sensor over the years finally turning to more stimulating things after running up a number of frustrating blind alleys. Not so the Philips organisation. Somewhere along the line they ran up an alley that bore fruit (... pomegranates and paw-paws, but that's another story entirely!). In 1979, Philips released a 'capacitive humidity sensor for consumer applications', type number 2322 691 90001. The device characteristics and applications circuitry were described in Philips Technical Note 134, issued 12 September 1979.



The capacitive humidity sensor.

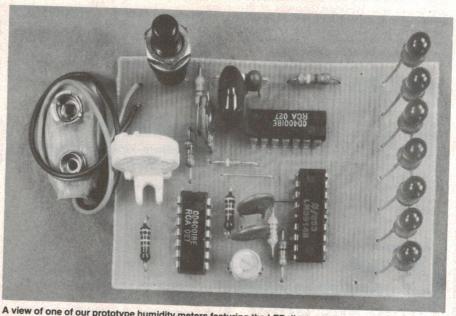

A view of one of our prototype humidity meters featuring the LED display. Note the sensor mounted on the board at the left, adjacent to the battery clip.

This project has been designed to use that sensor and employs a measurement technique described in that Technical Note. To cater for as wide a range of readers' interests and applications as possible, we have designed this project to display the relative humidity reading either on a conventional moving-coil meter or on a dot-mode LED display, using the ubiquitous LM3914 to drive seven LEDs indicating relative humidity over the range 35% to 100%. For those who wish to employ the project in an automatic humidity control system, it can be coupled to our Universal Relay Driver ETI-257, also described in this issue.

This project is not intended as a true scientific instrument as accuracy of the sensor is only a few per cent, but for most general domestic applications it should prove more than adequate.

The sensor

A humidity sensor to suit the applications described must meet two major objectives: it must have predictable behaviour and good long-term stability. In addition, the sensor must be ruggedly constructed for reliable operation and be simple to operate and maintain.

Philips claim their capacitive humidity sensor meets the above requirements, and our experience with them would bear this out.

The device consists of a perforated plastic case containing a membrane of non-conductive foil coated on both sides with gold, the membrane and coating forming, respectively, the dielectric and electrodes of a parallel plate capacitor.

Changes in relative humidity cause a change in the sensor's capacitance. With suitable circuitry, this change can be converted into a dc voltage that can

humidity meter

be used to give a direct reading of relative humidity, or to serve as the monitoring signal of an automatic humidity control system.

The sensor is designed to measure relative humidity between 10% and 90% and has the advantage that its long-term characteristics are unaffected by condensation of water on the foil surface.

The relationship between relative humidity and capacitance for the sensor is somewhat non-linear. To obtain a direct indication of humidity, either a non-linear scale must be employed on the readout or the circuitry output signal must first be processed by a linearising circuit.

The sensor will not respond immediately to a very rapid, large-scale change in relative humidity. For example, if the relative humidity jumps from 10% to 43%, it will take the sensor round three minutes to again provide a stable reading, according to the Philips data.

If the relative humidity exceeds 90%, even slight temperature variations can lead to condensation of water on the sensor foil; this will cause measurement errors and a considerable increase in response time. The sensitivity of the sensor is not specified below a relative humidity of 10%, although it would be feasible to measure values below this.




Figure 1. Block diagram of the circuit technique employed in the humidity meter. Two synchronised multivibrators provide an output signal which varies proportional to variations in relative humidity. 'H' is the humidity sensor.

The circuit

circuit technique used a We've suggested in Philips' Technical Note 134. The operating principle is based upon measuring the pulse width differences between two synchronised multivibrators (see Figure 1). M1 is controlled by the capacitive humidity sensor, the output pulse width varying as the humidity varies. The second multivibrator, M2, has a fixed pulse width, set by a fixed capacitor. The output of each capacitor is combined in a NOR gate which produces an output signal that varies in width proportional to the difference between the multivibrator output pulse widths (see Figure 2). This is very convenient as the difference signal will be virtually independent of temperature and voltage,





Figure 2. Illustrating how the output signal, t_3 , is obtained. If t_2 is fixed and t_1 varies with variations in humidity, t_3 will vary in direct relation to it.

provided the characteristics of both multivibrators are identical and the fixed capacitor controlling M2 has a temperature coefficient as close as possible to the capacitive humidity sensor. The first requirement is easily met as both multivibrators employ two gates from a 4001 quad NOR gate package.

To provide M2 with a temperature characteristic closely matching that of the humidity sensor, several positive temperature coefficient ceramic capacitors in parallel are used. A small value trimmer capacitor permits adjustment of this multivibrator to calibrate the

23.0 ±0.5 17.0 11.5 ±0.5 ±0.5 ±0.5 ±0.5 ±0.5 ±0.5 ±0.5

The relationship between H_{rel} and C_s (sensor capacitance) can be approximated by: $C_s/C_s(12\%) = 0.985 + 0.34(H_{rel}/100)^{1.4}$ where $C_s(12\%)$ is the capacitance at




Relationship between relative humidity, H_{rel} , and sensor capacitance, C_s .

Characteristics of the humidity sensor


Capacitance	122pF ± 15%
$(T = 25^{\circ}C, H_{rel} = 43\%, f = 100 \text{ kH}$ Sensitivity	Hz) $(0.4 \pm 0.05) pF/\%$
(H _{rel} = 43%) Operating frequency range	1 kHz to 1 MHz ≈ 0.1%/K
Temperature dependence (over operating frequency range)	
Measuring range Operating temperature range	0°C to 60°C
Maximum operating voltage	15 V
(ac or dc) Dielectric loss ($\tan \delta$) (at T = 25°C, f = 100 kHz)	<35 x 10−3
Response (90% value)	43% <3 min.
within the range of $H_{rel} = 10\%$ to within the range of $H_{rel} = 43\%$ to	
$(T_{amb} = 25^{\circ}C, \text{ in circulating air})$	
Hysteresis at one cycle (H _{rel} ▶ 10% ▶ 90% ▶ 10%)	≈ 3% (H _{rel})

Capacitance of the humidity sensor at four different frequencies (nominal values)


rrequencies (normali values)				
frequency f (kHz)	C ₀ (pF) (H _{rel} = 0%)	△C (12%) (pF)	△C (100%) (pF)	
-	116.1	3.6	45.5	
10	112.7	3.5	44.2	
100	109.0	3.3	42.7	
1000	104.6	3.3	41.0	



Response of sensor to rapid changes in humidity: (a) from 43% to 75%, (b) from 75% to 43%.



Influence of frequency upon sensor capacitance, C_s , based upon a reference frequency of 100 kHz. (Note this curve also represents the influence of frequency on $\triangle C$ and C_o .)

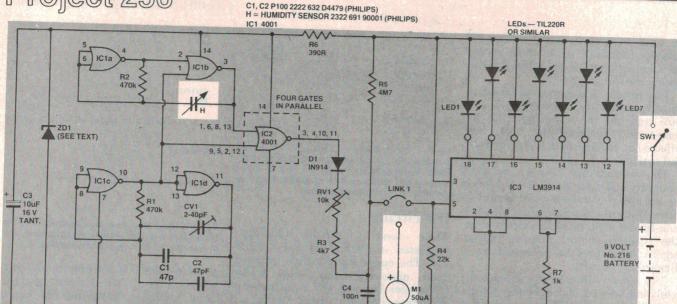

instrument and does not greatly affect the temperature coefficient.

The output voltage from the NOR gate used to combine the two pulses is obviously directly related to the supply voltage, so we have used a simple zener

regulator circuit to avoid supply voltage variations affecting the accuracy of the

Readout can be on a conventional meter or via a LED dot-mode display. A

as suggested by Philips, to prevent 'cramping' of the readout scale - regardless of whether a meter or the LED circuit is used. Its operation is explained in 'How It Works'. The LED display prolinearising circuit has been employed, vides relatively coarse steps but can be

- HOW IT WORKS — ETI 256

Two synchronised multivibrators employed and their outputs compared to provide a signal proportional to relative humidity. This output signal is first 'linearised' and then used to drive either a moving-coil meter or a LED dot-mode display employing an LM3914 dot/bar-mode display driver IC. One multivibrator has a period fixed by a set of ceramic capacitors and a trimmer capacitor (for calibration) while the other has a period set by the capacitance of the Philips capacitive humidity sensor. Thus the difference in period between the two multivibrators is a measure of the relative humidity, Hrel.

The two multivibrators are made up from two pairs of gates from a 4001 quad NOR gate package. This ensures both multivibrators have similar characteristics. IC1a and IC1b form one multivibrator, the period of which is controlled by 'H', the capacitive humidity sensor. IC1c and IC1d form the other multivibrator, the period of which is set by the parallel combination of CV1, C1 and C2. CV1 permits adjustment of this multivibrator's period for calibration purposes (zero setting). The two multivibrators are 'synchronised' turn on at the same time — by having pins 1, 12 and 13 tied together. To illustrate how each multivibrator works, we shall examine that using IC1c and IC1d.

When power is applied, the capacitance made up of CV1, C1, C2 will initially appear as a short circuit, thus coupling pin 11 to the input of IC1c (connected as an inverter), pins 8, 9. If we assume pin 11 is low initially, this will hold the input of IC1c low, forcing the output (pin 10) high. As IC1d is connected as an inverter, its input will be high, holding the output low. The CV1/C1/C2 capacitor will charge via R1. When the voltage across this capacitance rises above the logic low threshold, the input of IC1c will be high and its output will go low. This brings the input of IC1d low, and its output (pin 11) will go high. This will now charge the CV1/C1/C2 capacitor in the reverse direction, via R1. When the voltage across R1 drops

to the logic low level, the input of IC1c will again be low and its output (pin 10) will go high. This drives the input of IC1d high, driving its output low, and the whole cycle repeats.

The multivibrator involving IC1a and IC1b is synchronised to the other by having one input (pin 2) of IC1b tied to the output of IC1a. Only when both inputs of IC1b are high can the output of IC1b (pin 3) go low. Thus the outputs of both multivibrators (pins 3 and 11) go low together.

The humidity sensor has a positive temperature coefficient of about 100 parts per million. Accordingly, so that the other multivibrator has a similar characteristic, positive temperature coefficient capacitors with a rating of 100 ppm are used. The characteristic of CV1 has little effect.

The outputs of both multivibrators are combined in a NOR gate to provide positive-going pulses, the width of which will vary depending on the difference in pulse widths between the two multivibrators. As H varies with relative




Figure 4. The linearising circuit. The meter is included for the sake of explanation. R4 replaces Link 1.

humidity, the pulse width at the output of IC2 will vary in direct relationship. The four gates in IC2 are connected in parallel to provide a low impedance output to drive the 'linearising' circuit. This part of the circuit is shown in Figure 4 here, and for the sake of explanation the meter circuit output is included.

Pulses from the output of IC2 charge C4 via D1, RV1 and R3. At the same time, a discharge current proportional to the voltage across the capacitor flows via the meter circuit. An additional current is supplied to the meter circuit from the supply line, via R5. The amplitude of the output pulses from IC2 does not vary, but the width does. Thus the charge supplied to C4 will vary in proportion to the pulse width ratio. The output voltage across C4 supplied to the metering or display circuit will thus vary non-linearly. By judicious choice of the values of C4, RV1/R3 and the load (R4, including the meter), the relationship between relative humidity and the current through R4 (and thus the voltage across it) can be made substantially linear. In practice, the scale becomes a little cramped at the top end, but is considerably better than if the voltage across C4 were read off directly.

The LED display circuitry simply employs an LM3914 LED dot/bar-mode IC, operated in the dot mode here. This is partly to conserve battery current (prolonging battery life) and partly because it gives a much more convenient display in this application. It is arranged to read 0 - 1.25 V, according to the bias provided by R7. Only seven LEDs are used rather than the 10 possible, as the low scale one (pin 1) is inaccurate and rarely used, and the output from C4 provides 1 V at a relative humidity of 100% (thus the highest LEDs, pins 11 and 10, are unnecessary). The calibration graph in Figure 3 indicates at which levels each LED turns on and what Hrel. each LED corresponds to.

Supply is derived from a 9 Vdc source and the supply rail for IC1 and IC2 is zener regulated to 4.7 V.

PARTOLIO	T FT1.050
PARTS LIS	
Resistors	all 1/2W, 5%
R1, R2	. 470k
R3	
R4	
R5	
R6	
R7	
RV1	. 10k miniature trimpot
Capacitors	
C1, C2	
	10u/16 V tantalum
C4	
	2-40p film or
	ceramic trimmer
Semiconductors	
IC1, IC2	4001
IC3	
LED1-7	TIL220R or any
	suitable LED
D1	1N914, 1N4148 silicon
	diode 400 mW or 1 W zener,
ZD1	see text
	see text
Miscellaneous	DI III La dibirance
H1	Philips humidity sensor
	type 2322 691 90001
E11-256 pc b	oard, pushbutton switch (h); battery clip to suit No. 216
	i), battery clip to suit 140. 210
9 V battery.	

read at a glance. The indication is somewhat .non-linear; that is, the interval between each LED is not the same, as the linearising circuit is not perfect. The interval decreases with increasing humidity. Between LED1 and LED2, the change indicated in relative humidity is 15%, from 35% to 50%. At the opposite end of the scale, the change indicated in relative humidity between LED5 and LED6 is less than 10%. The reading indicated by LED6 is only accurate to a few per cent in any case. If you want to read the humidity to within 5% over most of the range between 10% and 90%, we suggest you opt for a meter readout. A calibration graph is given in Figure 3. To employ the project as part of an automatic environment control system, the LED readout circuitry is necessary.

Our prototype operates from a No. 216 9 V battery. To conserve battery life, we used a pushbutton switch to operate the unit, and the reading stabilises very shortly after the circuit is switched on.

Construction

The unit is quite easy to assemble. We've not given any details of housing the completed project as this is likely to vary widely according to individual requirements. Generally, the components may be assembled in any order. Take care with the orientation of the three ICs, the LEDs, C3 and the two diodes, D1 and ZD1. The humidity sensor is not polarised and may be connected any way round. Solder its leads quickly to avoid affecting its performance. The photo-

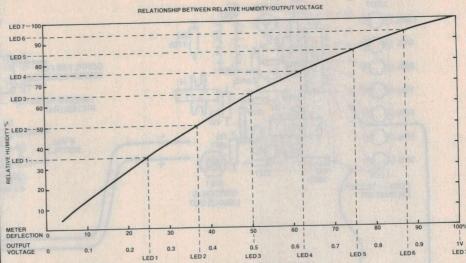


Figure 3. LED display and humidity readings against meter deflection.

graph of our unit shows the sensor mounted on the pc board, but we did this principally for convenience. It can be mounted off the board but it is necessary to keep the leads short and ensure they have little capacitance. We would recommend you mount the sensor no more than about 50 or 60 mm away from the pc board and use 22 gauge tinned copper wire spaced the width of the sensor's pins apart (about 5 mm). A twisted pair of hookup wire is not recommended.

If the unit is to be used in a very humid environment (in a hothouse, for example), mount the electronics in a sealed box with the sensor mounted externally, and pass the sensor's pins through a hole in the box, sealing the box with Silastic or a similar sealing compound so that the humid atmosphere does not affect the electronics.

Note that positive temperature coefficient (PTC) capacitors are specified for C1 and C2. No substitutes can be

made without adversely affecting the operation of the instrument. We have given Philips part numbers but other manufacturers do make PTC ceramic capacitors. It is necessary to ensure you purchase capacitors having a positive temperature coefficient of 100 parts per million (i.e: P100) of the nominal capacitance specified (47 pF).


Alignment

To obtain optimum performance, the following adjustment procedure is recommended:

If you are using the LED display, connect a high impedance voltmeter (input impedance of 1M or greater) between pin 5 of the LM3914 (IC3) and 0 V. Set RV1 at minimum resistance.

1) Replace the humidity sensor by a combination of capacitors to make up a value of 118 pF (a 100 pF, 15 pF and 3p3 in parallel). Turn the unit on and adjust CV1 to produce minimum out-

Component overlay. If you want meter readout, leave out IC3, the LEDs and R7, put R4 in place of Link 1 and connect the meter between the pin 5 pad of IC3 (+) and 0 V.

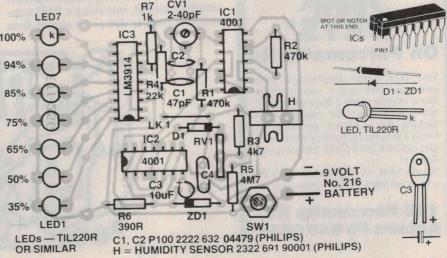

Project 256 2-40pF TO WATER SOLENOID SUPPLY IN FOR LINK FITTED WATER SOLENOID 75% 100 OHM RESISTOR FITTED (R5) 65% D1 - D4 4001 10 50% SUPPL 35% LED! SW1 LEDs — TIL220F OR SIMILAR 4 x IN4004 **SWITCH IS** LINKED OUT C1 1000uF 9VI ZENER (ZD1) FITTED BC557 THIS WIRE CAN BE CONNECTED TO INPUT 1 OR 2 10k, 1/2W THIS LEAD IS

put. You should be able to get this down to about 0.09 V (90 mV). A slight zero offset reading occurs due to the current supplied by R5. Turn the unit off after adjustment.

CONNECTED TO ONE OF THE REQUIRED

LM3914 OUTPUTS

2) Replace the 118 pF capacitor network substituted for the sensor by one of 160 pF (150p and 10p in parallel). Turn the unit on again and adjust RV1 to produce a reading of one volt on your voltmeter. LED7 should light.

can construct an environmental controller.

If you are using a 50 uA meter for readout instead of the LM3914 and LEDs, repeat steps (1) and (2), but this time connect your high impedance voltmeter across C4. In step (2) adjust for full-scale deflection on the meter.

As a controller

The humidity meter can be used as a controller in conjunction with the ETI-257 Universal Relay Driver Board described elsewhere in this issue. It is necessary to use the LED display version of the humidity meter. A simple interface circuit, involving a PNP transistor, is used to derive an output from

one of the LEDs on the humidity controller and drive a 'pull high to operate' input on the ETI-257 relay driver board. The accompanying diagram shows how it's done.

The switch on the humidity controller board is not used and the pads on the board are linked. A BC557 is mounted on a tagstrip, along with a 10k, ½W resistor, and this provides the interface between the humidity meter and relay driver boards. The appropriate humidity level is selected by connecting a lead from the cathode of the appropriate LED to the base of the interface transistor, via the 10k resistor.

Power supply for the humidity sensor is obtained from the relay driver board. Don't forget to install Link 1 on the latter board.


In this application the sensor should be placed so that it takes a reading unaffected by the source of water vapour.



one-stop electronics supermarket, has a branch open 7 days per week! Now you won't be caught short looking for a .001uF greencap to finish a project on Sunday afternoon. Just call into Dick Smith Electronics -Auburn!

*Open 9AM - 5.30PM Mon-Fri, 8.30 - 12 noon Sat & 10AM - 2PM Sunday

145 Parramatta Rd Auburn Ph 648 0558

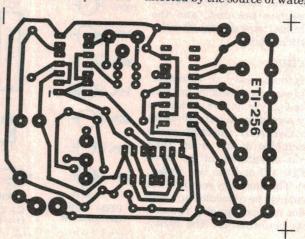

How to interface the humidity meter to the relay driver boad described elsewhere in this issue so that you

HURRY! THESE PRICES JUST CAN'T LAST FOR THESE FULL SPEC. PRIME I.C.'s

	2716. 450ns Single 5	5v Supply\$7.50
	2716, 200ns Single 5	Sv Supply\$19.50 ea.
	2114. 450ns	\$2.50
	2114. 300ns	\$3.30 ea.
	2708. 450ns	\$5.90 ea.
	4116. 200ns	\$2.50 ea.
	Z80 C.P.U.	\$10.80 ea.
	Z80A C.P.U	\$11 10 ea.
	Z80 C.T.C	\$9.40 ea.
	Z80A C.T.C	\$11.30 ea
	Z80A C. T. C	\$6.50 ea
	Z80 P.I.O	\$9.50 ca.
	Z80A P.I.O	\$8.50 ea.
	Z80 S10/0	\$38.60 ea.
	Z80A S10/0	\$49.00 ea.
	Z80 S10/1	\$38.60 ea.
	Z80A S10/1	
É	Z80 S10/2	

Z80A S10/2\$49.00	ea.
780 \$10/9 \$38.60	ea.
Z80A S10/9\$49.90	ea.

A DIT MDIPS		
S10/9	\$49.90	ea.
10/9	\$38.60	
S10/2		

8 BII M	
6802	\$11.80 ea.
6808	\$10.50 ea.
6809	\$45.00 ea.
6821	\$5.10 ea.
6840	\$7.84 ea.
6845	\$38.94 ea.
6847	\$28.00 ea.
6850	\$4.40 ea.
6852	\$5.50 ea.
0002	

Full range of chemicals available.	12" x 12"	\$9.40 ea.
ALL PRICES PLUS 15 PERC	ENT SALES TAX IF	APPLICABLE
ALL PRIOLOTEGO TO TELL		AND DESCRIPTION OF THE PARTY OF

FLOPPY DISC CONTROLLERS FD 1771\$25.00 ea. FD 1791\$61.00 ea. FD 1793\$61.00 ea. FD 1795\$65.00 ea. RISTON 3000 COATED FIBREGLASS BOARD SINGLE SIDED 6" x 3"\$1.60 ea. 6" x 6"\$2.25 ea. 12" x 12"\$3.30 ea.\$7.90 ea. DOUBLE SIDED 6" x 3" \$2.25 ea. \$3.25 ea. \$4.05 ea. 9" x 6". 12" x 12".....\$9.40 ea.

NEW JIFFY BOXES

New snap-in PCB design. PCB's slide vertically into card guides or larger boards will clip in horizontally. No more expensive

spacers etc. UB1 \$1.65 **UB3 \$1.30**

UB2 \$2.50 UB5 \$0.80

ALL PRICES PLUS 15 PERCENT SALES TAX


COMPUTER COOLING FANS Either 115 volts

or 230 volts


\$18.00 Plus 15% S/T



HIROSE AND ANSLEY RIBBON CABLE CONNECTORS FITTED SAME DAY



38MM 75MM



SOAR MODEL 501A

4 DIGIT LARGE LCD DISPLAY

> Send now for spec's.

Add \$3 P&P and certified mail.



HS3 HS4 HS5 UNANODISED HS11 HS12 HS13

BLACK ANODISED

"For reliable data storage, you can't beat Shugart's



CHECK THESE PRICES SA400....\$330.00

SA800....\$550.00

5 INCH \$3-69 8 INCH \$3-90



SA801 \$


550.CO		
Part No.	Sectoring	Application
MD 525-01	Soft Sector	TRS-80 Apple
MD 525-10	Hard 10 Sector	North Star
MD 525-16	Hard 16 Sector	Micropolis
FD32-1000	Hard Sector	Shugart 801R
FD34-1000	Soft Sector	IBM 3740





All prices plus tax

QUALITY RITRON HEATSINK (AS FEATURED AUGUST ETI)



	HS2 HS3 HS4	75MM 150MM 300MM	N	HS14 HS15 HS16	300MM 600MM 1200MM	
35 00 30 10	5-9 \$1.75 \$2.90 \$5.40 \$7.60 \$8.40 Price	\$1.50 \$2.50 \$4.90 \$7.10 \$7.90 On Application	\$1.35 \$2.00 \$3.80 \$5.90 \$6.50 ation	\$1.00 \$1.50 \$2.90 \$4.50 \$4.90	\$0.90 \$1.40 \$2.70 \$4.30 \$4.60	
			***	60.00	\$0.70	

MU45

PANEL METERS

600mm



50-0-50μΑ 1mA fsd 50μA fsd 10A DC All \$6.50 plus tax 30V DC

58mm x 52mm

MU45 VU meter \$7.60 plus tax MU65 100mm x 82mm 30VDC All \$9.60

10A DC plus tax 1mA DC Tax exempt customers from Ritronics Wholesale.

(03) 489 7099 \$3.30 ea 2708's \$11.00 ea 2732's \$6.90 ea \$23.00 ea 2716's 100 Redleds. \$9.00

ALL PRICES PLUS TAX IF APP

REGISTERED PACK & POST \$5.00



RITRONICS 425 HIGH ST., NORTHCOTE VIC **PO BOX 235** 489 7099

Bankcard Mail Orders Welcome

Please debit my Bankcard

Bankcard No Expiry Date

Signature . . ETI 5/81



'Universal' relay driver board

Operating a relay to switch heavy current or mains voltages is a common requirement in electronic control applications. This project permits a relay to be switched in a variety of ways and from a variety of inputs.

Graeme Teesdale


THIS VERSATILE relay driver unit is intended to be used with projects or devices not normally providing a switched relay output. In addition, power for external circuitry can be obtained from the board.

The unit has three groups of 'logic' inputs and a direct input. The relay itself is driven by two transistors, Q1

and Q2, and the direct input goes to the base of Q1 via a resistor (R7). Linking this input to the unit's 0 V rails — via a switch, a transistor which is turned on by a signal (open-collector logic) or a logic gate output — will operate the relay.

The logic circuitry on the board can be implemented by installing Link 1,

which connects the output of the logic circuitry to the direct input. There are two "logic high to operate" inputs (pins 1 and 2). A logic high level—i.e: voltage level above about 2 V — on either of these inputs will operate the relay. There are also two "logic low to operate" inputs (pins 7 and 8). Pulling either of these inputs below logic low—about

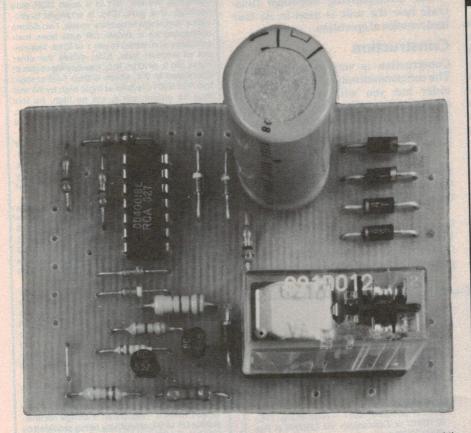

The relay driver board is simple, yet versatile. The external input/output pins are located around the edges of the board.

ATTENTION Microcomputer Programmers

Dick Smith Electronics, Australia's most energetic marketers of microcomputers like the highly successful System 80 and Exidy Sorcerer, are currently engaged in an ongoing program to develop truly Australian business software for these machines. To help us with this development, we're looking for further experienced contract programmers.

If you're an experienced microcomputer programmer with a professional outlook and demonstrated track record in completing projects in one or more of the following areas, we'd like to hear from you.


Z80 machine language programs
 Programs in Microsoft Level II
 BASIC

3. Business applications programming

Please apply initially in writing to:

Mr Jim Rowe Technical Director, Dick Smith Electronics, P.O. Box 321, North Ryde, NSW 2113 Project 257

The pc board artwork is on page 139.

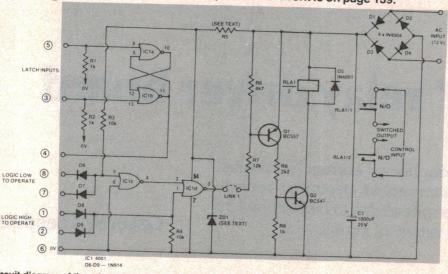

Circuit diagram of the relay driver board. Note that the rectifier diodes may be any of a range of types, such as 1N4001-2-4, etc, or EM401, EM402, etc. A variety of common relays will fit the pc board.

0.5 V — will operate the relay. Note that these input pairs are ORed with diodes and can be linked so that one input inhibits the other. In addition there are two "latch" inputs, pins 3 and 5. Pin 4 is the output of the latch circuitry and latch operation is implemented by linking this pin to one of the other inputs. All the logic inputs are high impedance and can be driven from CMOS circuitry.

This unit is powered from a 12 to 15 Vac source such as a plugpack or 5 VA transformer. Supply for IC1 (and perhaps any off-board circuitry) is obtained from a simple zener regulator circuit. This can be chosen to suit individual requirements. We used a BZY96/8V2 zener (1N4738) to provide an 8.2 V rail for IC1. We used a 220 ohm, 1 W resistor for R5. You can use any convenient zener from 5.1 V to - but no higher, and we recommend 1 W types run at around 50-60 mA current. You will have to work out the value of R5 according to your choice of zener. For a 15 V zener, R5 could be 47 ohms, for a 5.1 V zener, 270 ohms, or for a 12 V zener, say 100 ohms. There's plenty of latitude and

these values are only given as a guide.

The logic circuitry (i.e: IC1) can be supplied from an off-board source if you wish. To do so, remove R5 and use a 15 V zener for ZD1 to prevent spikes on the external supply line causing damage to IC1. Note also that the logic levels on inputs 1, 2, 3 and 5 should also be no higher than 15 V.

The accompanying drawings illustrate how the unit is used in its four basic modes of operation.

Construction

Construction is very straightforward. The components may be mounted in any order but you will probably find it easiest to leave the relay and C1 until last. Watch the polarity of all the diodes, the transistors and the IC. However, leave out link 1 at this stage.

Once you've got it together and have checked everything, apply 12 V ac to the ac input and check various modes of operation as follows:

(1) Bridge the free end of R7 to ground. The relay should operate.

(2) Install link 1, then bridge pin 7 to ground. The relay should operate.

Likewise for pin 8.

(3) Bridge pin 1 to the cathode of the zener. The relay should operate. Likewise for pin 2.

(4) Connect pin 4 to pin 1 or 2. The relay may operate. Apply a pulse to pin 3 or 5 and see that it latches on. A pulse on the other input will drop it out again.

If all is well, your unit is ready for installation!

HOW IT WORKS — ETI 257 -

The best place to start is right in the middle of the circuit — because that's the 'business' end!

Transistor Q2 has relay RLA1 as its collector load. Diode D5 provides protection for Q2 when the coil current is cut off whenever Q2 is turned off. The base of Q2 is driven by the collector of Q1 via R8 and R9. Base bias for Q1 is obtained from the resistor network of R6 and R7. The 'free' end of R7 can be linked to onboard logic circuitry (IC1) or driven by an external source.

If the free end of R7 is connected to 0 V then base current will flow in Q1, which will turn on. This will turn on Q2 and the relay will operate. In fact, all that is required to turn Q1 on is to 'pull' the free end of R7 about 1 V below the positive supply rail to overcome the 0.6 V base-emitter turn-on voltage of Q1.

Effectively, a 'low' level on the free end of R7 will operate the relay.

Two groups of logic circuitry built around IC1 are included to provide a variety of operating 'modes'. IC1 is a quad NOR gate package. One gate, IC1d, is arranged to provide a 'logic high to operate' mode. Two diodes connected as a simple OR gate have their cathodes connected to pin 1 of IC1d. The output of another gate, IC1c, drives the other input, pin 2, of IC1d. IC1c has one input (pin 6) connected to 0 V, which is thus held at logic low. Pin 5 IC1c is held at logic low. Pin 5 IC1c is held at logic high by R3 and thus its output, pin 4, will be high. As this drives pin 2 IC1d its output, pin 3, will be high. With Link 1 fitted, Q1 will normally be off and the relay not operated.

When a high logic level is applied to either input pin 1 or 2, or both, the diode(s) will conduct driving pin 1 IC1d high. The output, pin 3, will go low and the relay will operate. The relay will remain operated only while the input remains high.

Two diodes (D6, D7) are connected as a simple OR gate with their anodes connected to pin 5 IC1c. A logic low on either input pin 7 or 8 (Jogic low to operate') or both will pull pin 5 IC1c low and its output, pin 4, will go low. Pin 2 IC1d will go low and thus pin 3 IC1d will go low and the relay will operate. The relay will remain operated only while the input remains low.

The remaining two gates from IC1 are connected as a set-reset (SR) flip-flop. Pin 4 on the pc board provides an output which may be coupled to the other inputs. Assume the SR flip output is initially low. A pulse applied to input pin 3 or 5 will cause pin 4 (pins 9, 11 of IC1a, b) to 'latch' high. A pulse then applied to the opposite input pin will cause the output to go low again, and remain low.


This part of the circuit can be used as a switch debouncer as illustrated.

Power is derived from an off-board 9 Vac or 12 Vac source. This drives a bridge rectifier, diodes D1 to D4, smoothing being provided by C1. A zener diode, ZD1, is used to provide a regulated supply to the logic circuitry (IC1).

-PARTS LIST - ETI 257 -


- rania Liai	— E11 257 ————
Resistors all ½W,5% unless noted R1, R2, R9 .1k R3, R4 .10k R5 .220R, 1W (see text) R6 .4k7 R7 .12k R8 .2k2	Semiconductors IC1 .4001B Q1 .BC557 Q2 .BC547 D1-D5 .1N4001, 1N4002 etc D6-D9 .1N914, 1N4148 etc ZD1 .400 mW or 1 W zener, see text
Capacitors C11000 u/25 V electrolytic	Miscellaneous ETI-257 pc board; RLA1 — relay, Fujitsu FRL-621D012 or Takamisawa VB 12STAN or Pye 265/12/G2V.

universal relay driver

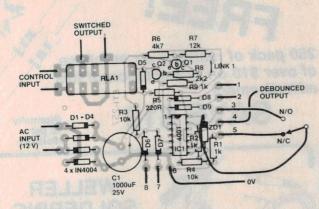


SWITCH DEBOUNCING

The SR flip-flop (IC1a and b) is not electrically connected to the rest of the circuit and may be used in external circuitry — for example, as a switch debouncing circuit.

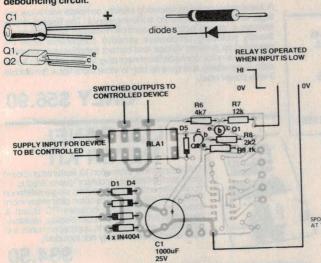


DIRECT INPUT

The relay will operate when the input is low (i.e: 0 V) or 'pulled' about 1 V lower than the positive supply rail. Only those components shown are necessary for this mode of operation.

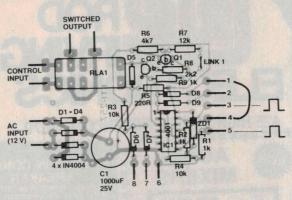

LATCH OPERATION

Pin 4, the output of the set-reset (SR) flip-flop, must be linked to either pin 1 or pin 2, or pins 7 or 8. A positive-going pulse on pin 3 or pin 5 will cause the relay to latch. A positive-going pulse on the opposite latch input will then cause the relay to unlatch.

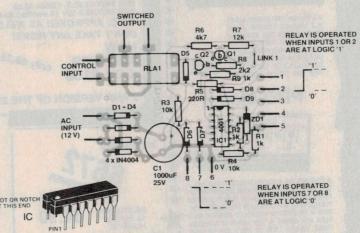

LOW OR HIGH TO OPERATE

The relay will be operated when pins 1 or 2 are held at logic high. To operate the relay from a logic low, pins 7 or 8 must be held at logic low. The inputs are ORed so that up to two input signals can be employed to operate the relay in each mode.



NOW SELL THE COMPLETE HARD DISKS MIRRORS CONSTELLATIONS

MORROW 26MEGABYTE HARD DISK NEC SPINWRITERS ITOH PRINTERS 8" DOUBLE. SIDED DISK DRIVES TELEVIDEO 912 ARCHIVES BUSINESS COMPUTERS TRS 80* TO S100 INTERFACE * TOUGH TABLE TANDEY CCS 12 SLOT MAINFRAME COMPLETE	1190 6500 149 499	5656 3378 923 802 1340 7175
CCS S100 BOARDS ASSEMBLED AND TESTED Z 50 * CPU AMHZ & TEXTURE Z TLOOR 16K STATIC RAM 32K STATIC RAM 43K STATIC RAM 64K DYNAMIC RAM AMHZ 12 SLOT MOTHERBOARD WITH CONNECTORS 5'AND 6' DISK CONTROLLER WITH CPM 2.2 2 SERIAL AND 2 PARALLEL PORTS A SERIAL PORTS A PARALLEL PORTS	FROM 295 FROM 555 649 140 399 450 229 285 250	627 727 157

SEND FOR OUR FREE 90 PAGE CATALOGUE

NOW INCLUDING A TUTORIALBRINGING

425 HIGH STREET, NORTHCOTE, 3070 *********



250 pack of resistors on purchase of over \$10 on presentation of this advertisement.

SAVE \$10

(Normally 4c per resistor)




AUDIO MIXERS



• 2 Hi-Low microphone inputs 2 Mi-Low microphone inputs
 2 Magnetic/Ceramic phono
inputs ● Also tape and tuner
inputs ● 2 VU meters ● Stereo
or mono ● Independent CUE on
each chan ● Compact size, 26 x
20 x 6.5cm ● 9V. battery operation, ext. DC input socket.

\$89

PRO Model



• Facilities for 4 stereo program input and 2 Facilities for 4 stereo program input and 2 mic. inputs • Built-in low noise preamplifier for magnetic phonos and low or high impedance microphones • Professional stereo side controls • Headphone circuits to monitor each input and output • Talk switch to attenuate music volume 14db so mic's can be used without readjusting music levels • 5 channel stereo graphic equalizer section using separate slider controls • Meters monitor the output of left and right channels independently.

\$169

"Selectalott"

With this great little kit you don't have to bother about thinking up numbers anymore. It features 40 LEDs and tells you what numbers to choose Great for picking a winner.

\$22.50



CYLON VOICE

Are you sick and tired of that boring voice? Build this delightful little kit and impress your friends with the Cylon Voice.

\$18.50

'LE GONG' door bell kit

Are you sick of ding-dongs? You don't have to spend a fortune to hear a pleasant sounding doorbell. This great little kit does the job sim-ply and cheaply. (pushbutton not included)

\$15.00

8" TWIN CONE **SPEAKER**

2851 240V/12.6C.T. 150MA \$2.50 2155 240V/16.3-15V 1A multitap \$3.85 S.E.C. APPROVED AS WELL DON'T TAKE ANY RISKS! NOW only \$6.25 ANOTHER K.O.! 2156

2 AMP VERSION OF THE 2155

\$4.90

BOX

60°



WELLER SOLDERING STATION

A transformer powered soldering station, complete with a low voltage, temperature controlled soldering pencil. The Special Weller features a 'closed loop' which controls maximum tip temperature, thereby protecting temperature sensitive components while the grounded tip protects voltage and current sensitive components.

Features:

quick connect/disconnect plug for the soldering iron extra large wiping sponge ● tip tray to store extra tips ● 2m flexible 3-wire power cord.

ONLY \$56.90



LCD PANEL METER KIT

This economical evaluation kit features on-board clock and reference, accuracy guaranteed to ±1 count over entire ± 2000 counts, single reference voltage for ratiometric operation plus many more important features. Kit includes PC Board & hardware, A/D converter, LCD display, resistors, capacitors, wiring diagram, application notes and data sheet (power supply not included).

\$34.50

TO RIBBONS ***** **RACK MOUNTING**

AND COIL

INCREDIBLE

240V/15-30V

NOW THRASHED

REED SWITCH



from \$35

Beautiful fashionable sturdy durable matt black finish

1-4 \$39 95 5 up \$35.00 Standard 19" (48.3cm) stacking

10's \$1.20 SAVE 1's \$1.50

HARD TO GET . . . **JAPANESE TRANSISTORS**

25Abb3	\$0.90c
2SA733P	\$0.550
2SC3/2	CO 40-
23C9UUF	CO EO
200101/	\$2 EQ-
2001018	£2 00-
230 1061	\$2 En-
2301090	\$1 100
200 122hA	Q4 4F-
20C1419B	Q1 0F-
2SC1449	#1.25C
2SC1675L	
2SC1730	50.40c
2SC1969	50.80c
2SC1973	\$5.50C
2SC2028	\$1.90c
2SC2166	\$1.90c
2SC2029	\$3.90c
2SD288	54.90C
2SD325F	
2SD350A	
2SD525Y	
2SK45	

QUALITY **SPEAKERS** ETI-4001 4-WAY 156W kits Pair \$579 Cabinets \$190





Bankcard	Mail	Orders	Welcome
----------	------	--------	---------

					_		•	•
Please debit my Banko	aı	0	t					
Bankcard No							W. 100	
Expiry Date								
Name								
Signature						-		

TO ORDER: Heavy Items sent Comet Freight on. Mail Order phone 481-1436. Wholesale Customers phone: RITRONICS WHOLESALE 489-7099 or 489-1923. Mail Orders to P.O. 235 Northcole 3070. Minimum mail order \$2. Add extra for heavy Items and registration, certified mail. Prices, spec. subject to change without notice.

425 HIGH STREET, NORTHCOTE, 3070

FROM THE

THE \$99 COMPUTER

These features as described to us by ETI: low cost, colour capability, plugs straight into TV set aerial, only requires a 9V plug pack to power it, audio output, simple to program and

many other features

Kit for Exidy Sorcerer EPROM Programmer to be released in August EA Kit price including Scotchcal Front Panel.

TV PATTERN GENERATOR

Kit of parts as featured in EA JULY 1980 Programs 2708, 2716 & 2532. Usw with TRS 80, Sorcerer & Compucolour Kit does not include connector from the programmer to computer.

COMPLETE KIT (inc Scotchcal Front Panel)

KIT WITHOUT CASE.

Kit of parts as featured in EA JUNE 1980, Dot, Greyscale, Crosshatch, Raster, Check.

COMPLETE KIT (including Scotchcal front panel)

With standard hex keypad — \$99; With discreet key switches — \$108; Starter Kit (1K RAM, B&W video) — \$99; 9v, 200 mA plus pack — \$6.50; Colour option (add parts to PCB) — \$8; RAM expansion (add parts to PCB) — \$17; Pre-programmed 2716 — \$18.50.

ETI - 256 **HUMIDITY METER**



UHF TV CONVERTER ETI - 730



KIT WITHOUT BOX

DIGITAL PANEL CAPACITANCE METER

DISTAL PARKE CAPACITARCE WELEN Kit of parts as featured in EA MARCH 1980 Four Digits. Extremely popular. COMPLETE KIT (inc. Scotchcal Front Panel). KIT WITHOUT CASE TY CRO ADAPTOR KIT (EA MAY 1980)

UNIVERSAL RELAY BOARD ETI — 257



\$75.00

\$36.90

\$59.99

\$52.49 \$29.00

\$ 9.50

\$13.50 \$32.50 \$69.50


\$34.90 \$54.90 \$109.00 \$24.90

\$99.00 \$79.90 \$32.50 \$129.00 \$129.00

\$15.95

LE GONG

Fantastic doorbell using the new Siemens SAB 0600 chip.



INCREDIBLE!!!

E/A has really done it this time. Display your Hi/Fi response on your colour TV. It will really impress your friends. Kit of parts...\$99




ETI Digital Clock ETI 564 At last a clock display that can be read at a distance; Kit of parts \$79.50

ETI 262 House Alarm Kit of parts only \$15.90


New EA Light Chaser Kit \$64.95 Includes Case plus Kit of parts.

LEDS and Ladders EA August 80 Great game for winter nights. Kit of parts \$18.00 Scotchcal Front Panel to suit 3-25

ETI Digital Car Tacho ETI 324 . . . Kit of parts \$29.95







(without power adaptor) POWER ADAPTORS TO SUIT		
KITS ETI SERIES 4000 50W STEREO AMP KIT Complete Kit Rack Mounting Case Woodgrain Sided Case	\$199.00 \$189.00	MK3 Drill Speed Control CAPACITOR DISCHARGE IGNITION MUSICOLOR MK3 KIT DISCO STROBE KIT LEDS & LADDERS (EA August).
PARTS AVAILABLE SEPARATELY Front Panel. Rack Mounting Case Wooden Sided Case ETI 471 PREAMP KIT of parts ETI 472 PS KIT of parts (without transformer). ETI 470 60W Kit pf parts	\$24.00	ETT 149 Two-Tone Generator ETT 563 Nicad Fast Charger DREAM 6802 KIT Power Supply TO Suit Hex Keypad. ETT 568 Sound or Light Operated Flash Trig- ger. ETT 147 ELECTRONIC DUMMY LOAD KIT SERIES 3000 "MINI" STERED AMP KIT

	\$10.90
Front Panel	\$55.00
Rack Mounting Case	\$49.00
Wooden Sided Case	\$45.00
ETI 471 PREAMP KIT of parts	
ETI 472 PS KIT of parts	\$47.00
(without transformer)	\$24.00
ETI 470 60W Kit pf parts	\$26.50
(without heatsink)	\$23.00
ETI 480 50W KIT of parts	\$17.50
EII 480 50W KIT OF PARTS	\$22.50
ETI 480 100W KIT of parts	\$11.50
ETI 084 Car Alarm KIT	\$29.00
EA TV CRO ADAPTER KIT	\$63.50
EA 300W POWER AMP MODULE	
CTI ACC SOOW DA MODIII F	\$63.50
EA DIGITAL CAPACITANCE METER KIT (EA	HOUSE SELECTION
March 1980)	\$52.99
AUTOCHIME KIT	\$29.75
AUTUCHIME KIT	

Advocame	
EA Power Saver August EA, an interesting approach to power saving	s. Kit of\$32.50
parts Eti147 Oct 80 Electronic Load Kit parts Eti327 Turn Hazard Unit Kit parts EA Digital Engine Analyser Oct 80 801Ma/10 kit	\$75.00 \$22.00 parts inc.
front panel ACE MON Oct FA kit parts	\$6.50
EA BIPOLAR TRAIN CONTROLLER Nov 80 kit parts EA DIGITAL STORAGE CRO Adaptor Nov 80 kit parts EA LIGHT BEAM RELAY NOV 80 Kit of parts	\$13.00
EA RS323 PRINTER INTERFACE Nov 80 kit parts	\$15.00

ger
ETI 147 ELECTRONIC DUMMY LOAD KIT
SERIES 3000 "MINI" STEREO AMP KIT
ETI 561 Metal DETECTOR KIT
PLAYMASTER 40+40 AMP KIT
PLAYMASTER AMFM TUNER KIT
PLAYMASTER GRAPHIC EQUAL
PLAYMASTER GRAPH ANALY KIT
EA 79SF9 Sound Flash Trigger
ETI 585H Ultra Sonic RX.
ETI 576 ELECTROMYOGRAM KIT \$8.95 bankcard welcome here

Please note we attempt to have all kits available to our customers. Provided of course we have the required information from the mags in time. Where a component is unavailable we may use a substitute or credit this cost so as to prevent delay.

Post & Pack \$2.50 small kits, heavier kits add extra postage

Bankcard Mail Orders Welcome
Please debit my Bankcard
Bankcard No
Expiry Date
Name
Signature ETI 5/81

TO ORDER: Heavy items sent Comet Freight on. Mail Order phone 481-1436. Wholesale Customers phone: RITRONICS WHOLESALE 489-7099 or 489-1923. Mail Orders to P.O. 235 Northcote 3070. Minimum mail order \$2. Add extra for heavy items and registration, certified mail. Prices, spec. subject to change without notice.

Babani Books

NEW TITLES!

FIRST BOOK OF PRACTICAL ELECTRONIC PROJECTS

Full constructional data, circuits, components lists for many practical projects including audio distortion meter, super FET receiver, guitar amp, metronome,

GIANT CHART — RADIO, ELECTRONICS,

SEMI-CONDUCTOR & LOGIC SYMBOLS

Identify those symbols at a glance. A must for beginners and advanced enthusiasts alike. Professionals can always hide it in their desks! A steal at **BP27**

FUN AND GAMES WITH YOUR CALCULATOR

Amazing collection of 101 jokes and riddles, several quite mind-boggling games for two or more players and a dictionary of numbers which are words if the calc. is read upside down. **BP38**

RADIO STATIONS GUIDE

Eight sections covering: European LW/AM; European, Near East and N. African MW/AM; World-wide SW/AM; European FM/VHF; Broadcast band USA; Broadcast band Canada; Local UK; Wavelength/frequency conversion. Book shows station site, country, frequency, wavelength, effective radiated power and, in some cases, call sign. \$6.45

COUNTER DRIVER AND NUMERAL DISPLAY PROJECTS

Well-known author F.G. Rayer features applications and projects using various types of numerical displays, popular counter and driver ICs, etc

TRANSISTOR RADIO FAULT-FINDING CHART

How to trace most common faults quickly. Top of chart indicates faults — users then follow arrows indicating checks in correct sequence until fault is cleared.

\$1.85

PRACTICAL COMPUTER EXPERIMENTS

How to build typical computer circuits using discrete logic. This book is a useful intro to devices such as adders and storers as well as a general source book of

\$6.50

ELECTRONIC PROJECTS USING SOLAR CELLS

Well-known author Owen Bishop has designed a number of projects that benefit from solar power and obviate the problems encountered with batteries, such as weight and bulk, frequency of replacement, and failure when batteries

\$7.15

AN INTRO TO BASIC PROGRAMMING TECHNIQUES

Ideal for beginners seeking to understand and program in BASIC. Book includes program library for biorhythms, graphing Y against X, standard deviations, regressions, generating musical note sequences, and a card game. BP86

\$7.15

SIMPLE LED CIRCUITS — BOOK 2 Sequel to BP42. Further light-emitting diode circuits. If you liked BP42 you'll

love this one. If you don't know either it's well worth buying both! \$5.50

HOW TO USE OP-AMPS

Source book of op-amp circuits. Design notes and applications including basic theory for amps, power supplies, audio circuits, oscs, filters, computers and control engineering. Book is written around the 741 but includes design notes for most common op-amps and comparators. Essential reference for amateur and professional alike.

HI-FI LOUDSPEAKER ENCLOSURES

Data for building corner reflex, bass reflex, exponential horn, folded horn, tuned port, Klipschorn labyrinth, tuned column, loaded port and multi speaker panoramics. Clear dimensioned diagrams included \$3.50

PRACTICAL ELECTRONIC SCIENCE PROJECTS

Unusual projects including laser, electronic gas detector, ultra high voltage generator, digital clock, reaction timer, geiger monitor, ultrasonic receiver and transmitter, electroscope etc.

DIODE CHARACTERISTICS, EQUIVALENTS & SUBSTITUTES Includes signal, zener, rectifier diodes etc. Full interchangeability data and characteristics of thousands of diodes of all types with every possible alternative. Includes UK, USA, European, Russian, and Far Eastern devices. \$4.60

ELECTRONIC CIRCUITS FOR MODEL RAILWAYS

Constructional details of a simple model train controller; a controller with simulated inertia, a high-power controller, an electronic steam whistle and a 'chuff generator'. Signal systems and train lighting and RF suppression also 213

BUILD YOUR OWN ELECTRONIC EXPERIMENTER'S LAB USING ICs.

Includes many circuits and designs for constructing test and measuring instruments mostly using modern ICs. Includes AF osc, TTL pulse detector, hiimpedance Vm, square-wave osc/pulse gen, logic probe, lo-range ohmmeter, bridge, signal tracer etc.

BUILD YOUR OWN HI-FI & AUDIO ACCESSORIES Essential for keen hi-fi & audio enthusiasts. Projects include stereo decoder,

three channel mixer, FET pre-amp for ceramic p.u.s, mic pre-amp with adj. bass, stereo dynamic noise limiter, loudspeaker protector, voice operated 220 \$3.10

28 TESTED TRANSISTOR PROJECTS

Some circuits are new, others are familiar designs. Projects can be split and/or combined for specialised needs. \$4.60

SOLID STATE SHORT WAVE RECEIVERS FOR BEGINNERS

Design and construction of several solid-state short-wave receivers giving high level of performance yet utilising relatively few inexpensive components. See also 226.

50 PROJECTS USING CA 3130 ICs.

The CA 3130 is an advanced operational amplifier capable of higher performance than many others: circuits often need fewer ancillary components. Interesting and useful projects in five groups. Audio projects. RF projects. Test equipment. Household projects. Misc. projects

\$4.60

50 CMOS IC PROJECTS

Many interesting and useful projects — multivibrators; amplifiers and oscillators; trigger devices; special devices. \$4.60

PRACTICAL INTRO TO DIGITAL ICS

Introduction to digital ICs (mainly TTL 7400). Besides simple projects, includes logic test set to identify and test digital ICs. Also includes digital counter-timer. \$4.60

direct from ETI

HOW TO BUILD ADVANCED SHORTWAVE RECEIVERS

Full practical constructional details of receivers with performance equal to commercial units. Also 'add-on' circuits of Q meter, S meter, noise limiter etc

BEGINNERS' GUIDE TO BUILDING ELECTRONIC PROJECTS

Enables total beginners to tackle electronic projects. Includes component identification, tools, soldering, building methods, cases, legends etc etc. Practical basic projects are included.

ESSENTIAL THEORY FOR THE ELECTRONICS HOBBYIST

This book supplies hobbyists with background knowledge, tailored for his or her specific requirements and presented in a readable manner with minimum maths. Purpose-designed examples illustrate applications.

1ST BOOK OF TRANSISTOR EQUIVALENTS & SUBSTITUTES

Complete transistor equivalents. Plus 25 000 transistors with alternatives and equivalents. Covers devices from UK, USA, Germany, France, Europe, Hong Kong etc. See also 211 and BP14.

HANDBOOK OF RADIO, TV, INDUSTRIAL & TRANSMITTING **TUBE & VALVE EQUIVALENTS**

Equivalents book for amateurs and serviceman. More than 18 000 old and new valves from UK, USA, Europe, Japan et al. CV (military) listings with commercial equivalents included.

2ND BOOK OF TRANSISTOR EQUIVALENTS & SUBSTITUTES Data on devices not included in BP1. This book supplements BP1, i.e. no data

is duplicated **BP14**

52 PROJECTS USING IC 741

A must for those interested in any way in this inexpensive and versatile IC. European best seller!

\$3.50

ELECTRONIC CALCULATOR USERS' HANDBOOK

Invaluable for all calculator users. Presents formulae, data, methods of calculation, conversion factors etc, often with examples. Includes way to use simple calculator for trig functions (sin, cos, tan); hyperbolic functions (sinh, cosh, tanh); logs; square roots, and powers.

BP33

50 CIRCUITS USING GERMANIUM, SILICON & ZENER DIODES

Contains 50 interesting and useful circuits and applications in many different branches of electronics.

BP36

50 PROJECTS USING RELAYS, SCRs & TRIACS

Relays, SCRs and Triacs are used in motor speed control, dimming, heating, timers, light sensitive devices, warning circuits, light modulators, priority indicators, circuit breakers etc. Book gives tried and proven circuits allowing easy modification to suit special needs.

DIGITAL ICs & PIN CONNECTIONS

Equivalents and pin connections of popular user-orientated digital ICs. Details of packaging, families, functions, manufacturer, and countries of origin. Includes Fairchild, Ferranti, Harris, ITT, Motorola, National, Philips, RCA, Signetics, Sescocem, SGS-Ates, Siemens, SSSI, Stewart Warner, AEG-Telefunken, Texas, Teledyne. Companion volume to BP41.

\$9.00

LINEAR IC EQUIVALENTS & PIN CONNECTIONS

Similar to BP40 but deals with linear ICs.

\$10.00

HOW TO MAKE WALKIE-TALKIES

Practical circuitry and construction of transmitters, receivers and antennas. A book of great interest to the licenced operator especially. This book was written with the UK licencing regulations in mind. Some parts may not accord with local regulations.

BP43

IC555 PROJECTS

One wonders how life went on before the 555! Included are basic and general circuits, motor car and model railway circuits, alarms and noise makers plus section on subsequent 556, 558 and 559s.

PROJECTS IN OPTO-ELECTRONICS

Included are simple circuits using LEDs as well as sophisticated designs such as infra-red transmitters & receivers, modulated light transmission and photo

LM 3900 IC PROJECTS

Unlike conventional op-amps, the LM 3900 can be used for all the usual applications as well as many new ones. It's one of the most versatile, freely obtainable and inexpensive devices around. This book provides the groundwork for simple and advanced uses - it's much more than a collection of projects. Very thoroughly recommended.

ELECTRONIC MUSIC & TAPE RECORDING

Shows how electronic music can be made at home with simple and inexpensive equipment. Describes how sounds are created and recorded to build up final compositions. Includes how to build a small studio including mixer and effects units

BP51

LONG DISTANCE TV RECEPTION (TV-DX).

Written by UK authority, the book includes many units and devices made by active enthusiasts. A practical and authoritative intro to this unusual aspect of

BP52

PRACTICAL ELECTRONIC CALCULATIONS & FORMULAE

For the practical person's workbench. Bridges gap between technical theory and cut-and-dried methods which work but leave the experimenter unfulfilled. There's a strong practical bias. Tedious and higher maths avoided where possible. Many tables included. This one's a beauty!

ELECTRONIC SECURITY DEVICES

Simple and also sophisticated alarms using light, infra-red and sonics; also gas and smoke detectors, flood alarms, doorphone and baby alarms etc.

HOW TO BUILD YOUR OWN SOLID-STATE OSCILLOSCOPE

Project divided into sections for builder individually to construct and test then assemble into complete instrument. Includes short section on 'scope BP57

50 CIRCUITS USING 7400 SERIES ICS

7400 ICs are freely obtainable, inexpensive and very versatile. Here's 50 interesting and useful circuits using this IC.

\$4.95

Babani Books

PRACTICAL CONSTRUCTION OF PRE-AMPS, TONE **CONTROLS, FILTERS, & ATTENUATORS**

How to construct a variety of magnetic tape recording, microphone, and disc pre-amps; plus tone controls, rumble & scratch filters, attenuators and pads

BP60

BEGINNERS' GUIDE TO DIGITAL ELECTRONICS

Covers all essential areas including number systems, codes, constructional and sequential logic, analog/digital/analog conversion.

BEGINNERS' GUIDE TO MICROPROCESSORS & COMPUTING Introduction to basic theory and concepts of binary arithmetic, microprocessor operation and machine language programming. Only prior knowledge assumed is very basic arithmetic and an understanding of indices.

ELECTRONIC GAMES

How to build many interesting electronic games using modern ICs. Covers both simple and complex circuits for beginner and advanced builder alike. Good one! **BP69**

A MICROPROCESSOR PRIMER

This small book takes the mystery out of microprocessors. It starts with a design for a simple computer described in language easy to learn and follow. The shortcomings of this basic machine are then discussed and the reader is shown how these are overcome by changes to the instruction set. Relative addressing, index registers follow as logical progressions. An interesting and unusual approach.

BP72 \$6.40

REMOTE CONTROL PROJECTS

Covers radio, infra-red, visible light, ultrasonic controls. Full explanations are provided so that the reader can adapt the projects for domestic and industrial as well as model use. **BP73**

ELECTRONIC TEST EQUIPMENT CONSTRUCTION

Describes construction of wide range of test gear including FET amplified voltmeter, resistance bridge, field strength indicator, heterodyne frequency meter etc. **BP75**

POWER SUPPLY PROJECTS

Designs for many power supplies including simple unstabilised, fixed and variable voltage regulators — particularly for electronics workshops. Also included are cassette power supply, Ni-Cad charger, voltage step-up circuit, and simple inverter, plus info on designing your own supply. All designs are low voltage types for semiconductor circuits.

RADIO CONTROL FOR BEGINNERS

How complete systems work with constructional details of solid state transmitters and receivers. Also included — antennas, field strength meter, crystal controlled superhet, electro-mechanical controls. Ideal for beginners. Section dealing with licencing etc not applicable to Australia.

POPULAR ELECTRONIC CIRCUITS — BOOK I.

Yet more circuits from Mr. Penfold! Includes audio, radio, test gear, music projects, household projects and many more. An extremely useful book for all hobbyists offering remarkable value for the designs it contains.

\$7.15

ELEMENTS OF ELECTRONICS

This series provides an inexpensive intro to modern electronics. Although written for readers with no more than basic arithmetic skills, maths is not avoided — all the maths is taught as the reader progresses.

The course concentrates on the understanding of concepts central to electronics, rather than continually digressing over the whole field. Once the fundamentals are learned the workings of most other things are soon revealed. The author anticipates where difficulties lie and guides the reader through them.

BOOK 1 (BP62): All fundamental theory necessary to full understanding of simple electronic circuits and components.

BOOK 2 (BP63): Alternating current theory.

BOOK 3 (BP64): Semiconductor technology leading to transistors and ICs.

BOOK 4 (BP77): Microprocessing systems and circuits.

BOOK 5 (BP89): Communications.

This series constitutes a complete inexpensive electronics course of inestimable value in hobby or career.

Books 1/2/3 Books 4/5

\$8.25 (each) \$10.80 (each)

ORDER FORM

Please forward

Book	Qty	BP1	eren year	BP50		DDCC	
205		BP2			14.5	BP69	
207		7		BP51		BP70	
211		BP14		BP52		BP72	
	2 11 14	BP23		BP53		BP73	
213		BP24		BP55		BP75	
218		BP27		BP56		The state of the s	
220		BP33		BP57		BP76	
221		BP36				BP77	
222		A COLUMN ACCOUNTS OF		BP58		BP78	19191
		BP37		BP60		BP79	
223		BP38		BP61	in the latest and	BP80	
224		BP40		BP62		BP82	
225		BP41		BP63			
226		BP43		ALL THE PERSON NAMED IN COLUMN		BP86	
227				BP64		BP87	
228		BP44		BP66		BP88	
220		BP45		BP67		BP89	
							100 miles

PLEASE NOTE: Following titles being reprinted. Delivery expected within six weeks . . . 160, 202, BP39.

Trade enquiries welcomed

Send to: ETI 'Book Sales', 4th Floor, 15 Boundary St, Rushcutters Bay NSW 2011. Please allow 4 - 5 weeks for delivery.

Post & handling:

l enclose \$		(inc. p & h.)			
5 - 10 books:	\$2.70	11 - 20 books: over 20 books:			
1 - 4 books:	\$1.35	11 00	00		

..... postcode



A manufacturer's mistake means we can sacrifice these incredible CRAIG language translators at a staggering

90 DAY WARRANTY

CRAIG M100

This unit sold in Australia for \$250 and over 200,000 were sold world wide at similar prices. The manufacturer made too

many

WAY BELOW and we have scooped a limited quantity at WAY BELOW the

manufacturer's cost!

How would YOU like to be able to convey your thoughts, needs and questions in

another language? Well now you can! The CRAIG M100 enables you to type in a

message and at the touch of a button translate that message into another language. It even has whole phrases that can be

called up at the touch of a button and

partial phrases to which you can add your

own ending. A truly remarkable unit that

can calculate (e.g. currency conversions)

and it has inbuilt metric conversions, a

great boon! The Craig M100, a true hand-

held language computer with RAM, ROM

and CPU! Ideal for businessmen on over-

seas trips, students studying languages

COST

SAVE \$180 Normally over \$250!

NOW S

Includes English Cartridge

YOU REAP THE BENEFIT

It is recommended that you use 4 Duracells (Cat. S-3280) at \$2.78 or 4 NiCads (Cat. S-3300) at \$2.05 each. If using the NiCads they can be recharged in the Craig M100 by using the M-9525 battery eliminator which also serves to power the unit from the AC. The M-9525 is great value at \$6.90.

CARTRID

French (Y-1341): Japanese (Y-1342): German (Y-1343): Italian (Y-1344): Bar & Wine Guide (Y-1345) and Calorie Counter (Y-1346)

Normally \$35 ea

ALL AT \$12 ea

DAY SATISFACTION GUARANTEE TRY ONE AND SEE!


If you are not totally satisfied return the unit in the same condition as received and your money will be refunded.

DICK SMITH ELECTRONICS



See our other advertisements in this publication for a full list of store addresses, phone numbers and post details.

TCT S100 PROM

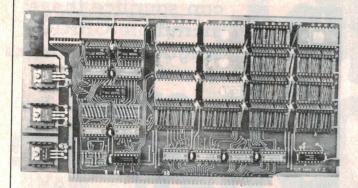

From March 1981 ETI, this is the new S100 ETI-682 PROM board. This feature packed board may be used with no less than four PROM types: the 2708 2758, 2716 (+5V) and 2732. This means the board will not become redundant as PROM prices fall and the 2732 becomes popular.

The board has two banks of eight PROMs each, located on 4K boundaries. Features on this board include:

include:

* Different PROMs may be used in each bank

* Dipswitches disable unused PROM sockets


* Supports phantom and bank select

* Inserts wait states for slow PROMs

Blank board with manual Complete kit with manual

\$ 69 \$115

TCT S100 Dynamic

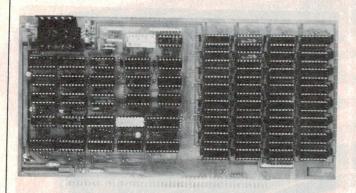

FEATURES:

- * Designed for the S100 bus
- * Expandable from 16 to 64K
- * Does not need halt, wait and reset status signals from bus
- * Optimal arbitration between refreshes and memory accesses
- * All timing derived from 25MHz clock
- * Will run at any speed from zero to 2.5MHz (Z80)
- * Arranged as four 16K banks, with independent write protect and disable
- * Supports bank select and phantom
- * Genuine S100 board size, 5.3 by 10.0 inches
- * High quality solder masked and plated through
- * Excellent manual, including construction and setting up details and a discussion of testing and memory design techniques.

Unlike most other dynamic boards our's does not use the PSYNC, PWAIT, PHOLD, SM1, RESET, phi 2 and HALTA signals from the bus. Our board uses only one more control signal than most static boards. This means it is easier to interface to virtually any system. We have extensively tested our dynamic board with the DGZ80, Base 2, Jade, Cromenco and SD100 CPU cards. The TCT dynamic board is being used with Versafloppy, Micropolis and Tarbell floppy disk controllers.

All prices include 15% sales tax

T.C.T. MICRO DESIGN PTY. LTD.

Engineering excellence P.O. Box 263 Wahroonga, 2076, N.S.W. Phone (02) 48-5388 A.H.

KIT PRICES:

	inc. tax	ex. tax
16K bytes	\$279	\$245
32K bytes	\$349	\$305
48K bytes	\$419	\$365
64K bytes	\$489	\$425
8×4116 (200ns)	\$75	\$66

Add \$60 for assembled and tested.

OEM enquires welcome.

Post and packing charges: \$10 for overnight delivery by courier \$3 for delivery by post

Allow two weeks for delivery, we will immediately inform of any unexpected delays.

COMPONENT USERS.

IN BRISBANE. OCK ITEMS

Using our on-line computer hook-up from sales office to warehouse, and despatching by Skyroad you get the goods next day.

We stock over 7,000 line items of semiconductors, capacitors and resistors from

Motorola, Texas Instruments, Philips and Hewlett Packard.

Try us for service on the widest component range at competitive prices.



(AUSTRALIA)

THE DISTRIBUTOR OFFERING SOMETHING UNIQUE...SERVICE Adelaide 51 6483 • Brisbane 52 4261 • Melbourne 877 5311 • Perth 328 8091 • Sydney 439 8622

Lab Notes

Gate, square, sine, modulate — with the 555 & 7555.

Ray Marston

The ubiquitous 555 timer chip, or its modern CMOS counterpart the 7555, can be readily used as a highly stable and cost-effective astable multivibrator. Although often used just as a square wave generator, they're capable of performing some fairly fancy tricks.

THE OLD-FASHIONED 555 IC should be a fairly familiar component to the average hobbyist. It's the 'universal' square wave generator, pulser, gate and timer. But really, it's much more than that if you employ a little ingenuity in circuit design. The modern CMOS version, the 7555, is even more versatile than its predecessor. Apart from a wide variety of gating functions, the 555/7555 can perform tricks like ramp and sine waveform generation.

Astable gate

The 555/7555 astable can be gated on

and off in a variety of ways, to produce different output waveforms. Figure 1 shows the basic connections and the equivalent circuit of the standard 555/7555 astable. It is necessary to understand the operation of this basic circuit in order to appreciate the action of the various gating methods. In the following discussions, a 12 V supply rail is assumed in all circuits.

The first point to note about the Figure 1 equivalent circuit is that the IC contains a three-resistor potential divider, two voltage comparators, a flip-flop, a transistor and an output buffer.




Figure 1b. Equivalent circuit of the 555-type astable multivibrator.





Figure 1a. Basic circuit of the 555-type astable multivibrator.






Figure 2. Conventional way of gating the 555 astable, with resultant waveforms.

The divider ratios are such that onethird of the supply voltage (i.e: 4 V) is set on the lower comparator and twothirds of the supply voltage (i.e: 8 V) is set on the upper comparator. The circuit action is such that, in each operating cycle, C1 first charges up to 8 V through R1-R2, at which point the upper comparator activates the flip-flop and turns normal way, but when the circuit is is achieved by choosing the R3-R4 first half cycle is again considerably

biased and the astable operates in the that of the succeeding half cycles. This gated off D1 shorts out C1 and pulls values so that the voltage across C1 is point A to ground; in practice, of course, only a fraction below 4 V (one-third of SW1 can be replaced by an electronic supply volts) during the off condition. A switching waveform (the output of a substantially different set of waveforms CMOS gate, etc). Note in this circuit can be obtained by choosing the R3-R4 that, when the astable is gated on, the values so that the voltage across C1 is a fraction below 8 V (two-thirds of supply

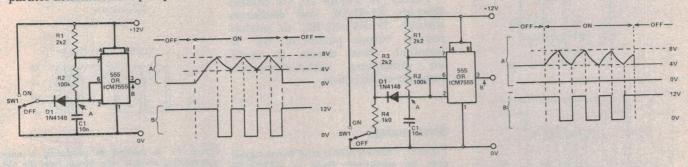


Figure 3. Basic method of gating the 555 astable using C1, with resultant Figure 4. Modification of the C1 gating scheme, giving constant-period waveforms. Note that the period of the first half-cycle is longer than that of half-cycles. the succeeding half-cycles.

the internal transistor on; the transistor then discharges C1 through R2 until the C1 voltage falls to 4 V, at which point the lower comparator activates the flipflop and turns the internal transistor off, causing C1 to recharge through R1-R2. The operating cycle is then complete and repeats ad infinitum. A ramp waveform with an amplitude that swings between 4V and 8V is generated across C1 and a rectangular waveform is generated at the output, pin 3.

The conventional way of gating the 555/7555 astable is with the pin 4 reset terminal, as shown in Figure 2. When this pin is pulled to ground (by a 1k resistor), the flip-flop output is driven high, thus discharging C1 through R2 and the transistor and also driving the output (pin 3) low. The resulting circuit waveforms are shown in the diagram. Note that, when the astable is gated on, the first half cycle is considerably longer than the succeeding half cycles. Also note that, when the astable is first gated off, the voltage across C1 takes a substantial time to decay to zero. The output is zero during the off condition.

Alternative methods

One alternative method of gating the 555/7555 is shown in Figure 3. Here, when the circuit is gated on, D1 is back-

longer than the succeeding half cycles, but that the C1 voltage falls abruptly to zero at gate-off. Also note that the output is high in the off state, here.

Figure 4 shows how the above circuit can be modified so that the duration of the first half cycle is almost equal to

volts) during the off condition, as shown in Figure 5.

It should be appreciated that the 555/7555 astable can only oscillate if its timing capacitor (C1) is free to swing between the 4 V and 8 V switching levels. This simple fact makes it

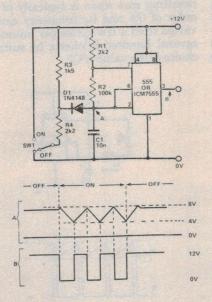


Figure 5. This slight modification of the C1 gating scheme produces a considerable change in the circuit output waveforms





Figure 6. The voltage-controlled astable produces an output only when Vin exceeds two-thirds supply (8 V in this example).

possible to voltage-gate the astable by using the circuit of Figure 6. Here, the circuit produces output waveforms only when the input voltage exceeds 8 V. The circuit can be made to trigger at other levels by giving the op-amp an appropriate voltage gain factor.

Lab Notes

Finally, an alternative method of gating the 555/7555 astable is shown in Figure 7. Here, the circuit is gated off by driving the voltage across C1 above 8 V by D1. A feature of this circuit is that its 'B' output is low in the off condition.







Figure 7. This C1 gating scheme produces a 'B' output that is low in the off condition.

Asymmetrical astables

The basic 555/7555 astable generates near-symmetrical output waveforms, provided that R2 is large relative to R1 (giving near-equal C1 charge and discharge time constants). Figures 8 to 10 show alternative methods of generating








Figure 8. A method of producing a nonsymmetrical fixed ratio from the 555 astable.



Finally, in Figure 10, C1 charges through R1-R3-D2 and discharges through D1-RV1-R1-R2, to produce narrow output pulses at the 'B' terminal. This circuit is useful for generating variable-frequency constant-width pulses.

Sine waves

Figure 11 shows how a sine wave signal can be obtained from a 555/7555 astable. Here, the symmetrical ramp waveform of C2 is buffered by Q1 and then ac coupled to the R1-R2-D1-D2 divider/limiter network. This network attenuates the ramp signal and then non-linearly removes the ramp's positive and negative peaks, to produce a sine-shaped waveform of about 1 V peak-to-peak amplitude at the output terminal. The distortion level of the resulting sine wave is typically of the order of 3% and its frequency can be varied from a few cycles per minute to several hundred kilohertz by suitable choice of the value of C2.







Figure 9. Alternative method of producing a nonsymmetrical fixed ratio output from the 555 astable.






Figure 10. A method of producing a nonsymmetrical variable ratio output from the 555 astable.





Figure 11. A 555 sine wave generator with a range of 83 Hz to 1.4 kHz (via R1).

AM output

Figure 12 shows how the pin 3 square wave output of the 555/7555 astable can be amplitude-modulated to produce the typical attack-hold-decay envelope of a simple musical instrument or of a special-effects sound generator. The heart of the unit is the diode AND gate, or mixer, formed by D1-D2-R5. One input of this gate is fed from the output of the astable via R3-R4 and the other from across R6. The basic action of this gate is such that (ignoring the diode volt drops) its output amplitude is equal to the lesser of the two inputs.

Thus, when D1 is fed with the square wave output of the astable, the peak output of the unit will be zero when the voltage across R6 is zero, or 5 V when the voltage across R6 is 5 V, etc. In our circuit, R6 is shunted by electrolytic capacitor C2. Thus, when PB1 is pressed, a large voltage is applied to R6 and a large-amplitude square wave output is available. When PB1 is released, the voltage across R6 and the square wave output amplitude decay exponentially to zero (with a time constant of R6-C2), as shown in the diagram. The R3-R4 network is used to apply a slight offset bias to the rectangular input waveform, to ensure a full cut-off of the output waveform after PB1 is released.

Finally, Figure 13 shows how the above circuit can be modified to give extended delay times (via emitter follower Q1) and a buffered audio output (via emitter follower Q2).






Figure 12. A method of amplitude-modulating the pin 3 output off the 555 astable in music and sound generator applications.

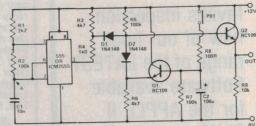


Figure 13. A modification of the Figure 12 circuit to give extended decay times and a buffered output.

THIS IS FREE...



WITH EVERY PURCHASE OF THIS



This Audio Technica light weight headshell is free! In this special offer for mail order purchase only, each Audio Technica AT 11 E cartridge with elliptical stylus is supplied with headshell, AT NO EXTRA COST. All you pay is the regular price of the Audio Technica AT 11 E cartridge at \$31.00 and you have a complete new module that you can simply plug in to your pickup arm. You can discard your old cartridge or keep it as a spare ALL for the price of the cartridge alone.

MAIL YOUR ORDER NOW FOR THE AUDIO TECHNICA 11 E CARTRIDGE AND RECEIVE AS WELL, THE AUDIO TECHNICA UNIVERSAL PLUG-IN HEADSHELL.

THE PRICE \$31.00 MAIL ORDER ONLY

BEST BUYS! CASSETTES, CARTRIDGES, HEADPHONES

Hitachi LN C 60......\$16.00 pack of 12
Hitachi LN C 90.....\$22.00 pack of 12
Hitachi UDC 60....\$28.00 pack of 12
Hitachi UDC 90....\$36.00 pack of 12
Maxell UDC 60...\$29.00 pack of 12
Maxell UDC 90....\$37.50 pack of 12

Memorex 8 track 90 min cartridge
(a hard to get item)pack of 5 \$20
Memorex 8 track headcleaner
cartridges\$7.00 ea.
Akai 8 track head
demagnetizer\$10.00 ea.

FOR IMMEDIATE DELIVERY OF ANY ITEM, POST YOUR CHEQUE OR MONEY ORDER NOW TO:



P.O. BOX 345, ARTARMON 2064 N.S.W. Ph (02) 428-3623 GOODS AVAILABLE BY MAIL ORDER ONLY. All items offered are covered by manufacturers regular warranty.

COMPUTER COUNTRY PTY LTD

338 QUEEN STREET MELBOURNE, VIC. 3000 PHONE (03) 329-7533

AND


COMPUTER CITY 600 OLD CLEVELAND ROAD CAMP HILL (BRISBANE) QLD. 4000 PHONE (07) 398-6433

Invites inspection
now of our huge
range of the LATEST
Software available
for the APPLE II
PLUS & other
microcomputers.
Names like:Adventure
International, Muse,
Softape,
Crystalware,
Automated
Simulations, Avalon
Hill and many others.

ALSO
Ring NOW to
enquire about our
first
NATIONAL
ADVENTURE
TOURNAMENT


AFFORDABLE INSTRUMENTATION

AIM-65, SYM-1 DISC SYSTEM



HDE: Disc system for AIM-65 and SYM-1. Includes TEAC. (Single density single sided for high data reliability).

FD50A drives W.D. 1771 based controller card (KIM 4 bus compatible — plugs directly into Mother Plus II), file orientated disc system and Text Editor software, cables and power supply.



SPECIAL AIM 65-1K \$429 A&T SYM-1 \$199 A&T

BAS-1/2 (2x2332)\$8
6x2114 for SYM, AIM\$19.5
4x2532 (suitable for
DRAM PLUS)\$63.50
K1M-2\$289 A&
PS1 for SYM 5V, 4A:
± 12V, 0.4A\$74.50 A&
DRAM PLUS 32K RAM, 16K EPRON
SPACE, EPROM PROGRAMMER
2x6522\$369
SYM software for Visible Memory and
Music Synthesizer available.
AIM-65 4K, assembler and Basic \$649
Enclosure with PS1 plus 24V \$140
PL 65 on ROM for AIM 65\$145



P.O. BOX 6502 GOONDA 4300 PHONE (07) 288-2757 PRICES PLUS TAX IF APPLICABLE

Verbatim.



MINIDISKS

Verbatim, the world's leading producer of minidisks, makes the widest range of minidisks available for word processing and data processing applications. Intent on maintaining this position of leadership, we constantly strive to make our minidisks even better.

Each Verbatim minidisk is equipped with a hub reinforcing ring to aid in registration, reduce errors and give better alignment repeatability. Our dual-sided, double density minidisks offer users higher storage capacity. Our new plastic box makes our minidisks easier to use, safer and more convenient to store. Our testing standards go beyond the industry standard because we insist on Verbatim being the industry standard of excellence.

Try new Verbatim disks for the performance of a lifetime.

"We play it back, Verbatim"


Magnetic Media Services Pty. Ltd.

SYDNEY: 5 Apollo Place, Lane Cove, NSW. 2066. Phone (02) 428-1100. Telex AA22703.

MELBOURNE: 320 Toorak Road, South Yarra, VIC. 3141. Phone (03) 240-8288. Telex AA32127.

BRISBANE: 146 Leichhardt Street, Brisbane, QLD. 4000. Phone (07) 229-1941. Telex AA42367.

CANBERRA: 25 Lonsdale Street, Braddon, ACT. 2601. Phone (062) 48-6751. Telex AA22703.



- Quality components. . . .
- Full, easy to follow instructions.
- Competitive price. . .

WHY SETTLE FOR LESS!

NEW KITS FOR MAY

UHF TV is here: but only a small percentage of TV's are fitted with UHF tuners. Use any standard VHF TV set with: this convertor: use for a single: channel or make it tuneable.

Cat. K-3235 SEE ETI MAY

DRIVER SEE ETI MAY

(Printed Circuit Board Only)

How many times have you wanted to control mains, etc, but haven't known how to? This simple interfacing project shows you how to: suits most applications

Cat. H-8638 \$ 295

Save a fortune on commercial units! Includes pre-wound coil

CORE BALANCE

This one should be in every hobbyists workshop - it could save your life! Senses any leakage to earth from a mains appliance (e.g. through your body) and shuts off power before it has a chance to electrocute you.

SEE ETI APRIL

4050

Cat. K-3315

Ideal burglar alarm, door minder, etc. Sounds alarm if beam is cut. Also fantastic for wildlife photography.



Cat. K-3375

SEE EA APRIL

Improve your health NEGATIVE ION GENERATOR

Completely safe - battery or plugpack operated. With an incredibly well researched article showing how beneficial negative ions can be!

Cat. K-3335 SEE ETI APRIL

(For System 80) INTERFACE

Enables your System 80 or TRS-80 computer be used with many of the serial-type devices: teleprinters, etc. A must for the hobbyist buff: gives you the chance to use ex-disposals

Cat. K-3608

SEE EA APRIL

HOT CANARY

(short form) SEE EA MAY

A gimmick that will keep any child amused for hours! An electronic bird whistle that sounds just like the real thing

K-3395

SPEED SENTRY

(short form) SEE EA MAY

For safer driving. An alarm sounds if you go over a pre-set speed. You set the speed

K-3245

INFRA RED REMOTE CONTROL

Control any mains operated (or other) device from across the room Now you can turn the TV off from your chair - or turn the stereo on.

> Cat. K-3380 SEE EA MAY

dB METER

Troubled by noise? Worried about exceeding noise pollution laws? Build this simple dB meter and find out. Easy to build, save \$\$\$ on commercial units.

Easy to build.

Cat. K-3476 SEE EA MAY

DICK SMITH ELECTRONICS



See our other advertisements in this publication for addresses, phone numbers, post and packing etc.

Ideas for **Experimenters**

These pages are intended primarily as a source of ideas. As far as reasonably possible all material has been checked for feasibility, component availability etc, but the circuits have not necessarily been built and tested in our laboratory. Because of the nature of the information in this section we cannot enter into any correspondence about any of the circuits, nor can we produce constructional

ERRATA

A rather obvious, but potentially dangerous error occurred in the circuit on the top left of page 60 ('Power Monitor') in the March issue. It shows the mains active input connected to the earth at the output. The mains active input should instead go to the fuse. Correct your copy now. Correction slips were inserted in the majority of copies distributed.

Simple anemometer

Having managed to pronounce the heading (an-ee-mom-meter), no doubt you're wondering what it is. It's a wind speed indicator.

The idea comes from 14-year-old Wayne Brown of Dromana in Victoria. Make up an anemometer rotor and attach two small magnets to a mounting on the bottom. A reed switch is then placed under this assembly such that the two magnets operate the reed switch twice per revolution of the rotor


The reed switch gates on and off a 555, the output of which is rectified and integrated to drive a meter (M1). You can use a meter having a sensitivity up to 150 microamps, but the resistor in series with the 1N914 will have to be selected to suit.

To calibrate it, you will need: one daring passenger

one car

plenty of road no radar traps.

With the anemometer's rotor held outside the vehicle (clamped to a roof rack, for example), drive at a variety of speeds for a short distance at each speed. The passenger can then mark down the meter reading against the car's speed so that the meter scale can be later marked with the calibrations.



The ETI-480 amp module — barefoot and bridged.

For many years now, constructors have built the ever-reliable ETI-480 power amp and many people in the industry have used this design in many different ways. Some other variations that have been tried from time to time are listed in the table here, compiled by G.T. Dicker of Parkholme, S.A.

One of the most useful ways to utilise the ETI-480 is by bridging the output stage for increased power into higher load impedances.

This may be done with the 2N3055/ 2N2955 output stage combination or by utilising the MJ802/MJ4502 or

MJ15004/MJ15003 type transistors in their place.

To bridge two modules, one must first get the modules working to specification, then add a 10k, ½W resistor from the junction of R8 and R9 on module 2 to the output stage, junction of R22 and R21 on module 1. Audio input is then provided to module 1 and output is taken from module 1 and 2 output stages. The input to module 2 may optionally be shorted but in practice makes little difference.

If you feel some of the options tabled look attractive wait and see what will be done with the ETI 466!


ETI-480 TABLE O	FOUTPUT POWER FO	OR VARIOUS CONFIG	URATIONS
Supply Voltage	3055/2955	MJ802/4502	MJ15003/MJ15004
±30 Vdc single-ended	35 W - 8 ohm 65 W - 4 ohm	35 W - 8 ohm 65 W - 4 ohm	35 W - 8 ohm 65 W - 4 ohm 100 W - 2 ohm
±45 Vdc single-ended	65 W - 8 ohm	100 W - 8 ohm 150 W - 4 ohm*	100 W - 8 ohm 190 W - 4 ohm 300 W - 2 ohm*
±30 Vdc bridge	150 W - 8 ohm* 75 W - 16 ohm	150 W - 8 ohm 75 W - 4 ohm	150 W - 8 ohm 190 W - 4 ohm
±45 Vdc	100 W - 32 ohm	190 W - 16 ohm	195 W - 16 ohm 355 W - 8 ohm*

*NOTES: Not recommended, unless for home hi-fi.

At output powers above 100 W RMS extreme heatsinking and/or forced air cooling is recommended.

Not all configurations are necessarily safe for continuous output power operation.

When MJ802/MJ4502 or MJ15003/MJ15004 are used supply fuses F1, F2 must be changed to 5 amps.

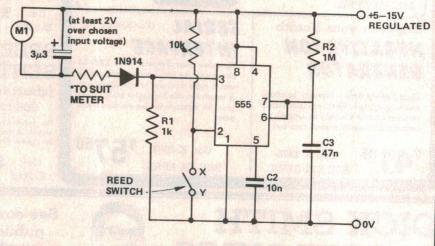



Australia's Resistor House "BIG SAVINGS!"

Carbon Film Resistors 1/4 watt 5% tol.

50¢

100 in 100 lots* 40¢

100 in 1000 lots* Metal Film Resistors
1/4 watt 1% tol. 50 P.P.M.

\$2

100 in lots of 1000* \$2.50

100 in lots of 100*

*Plus sales tax if applicable.



VSI ELECTRONICS (AUSTRALIA) DTY LTD


VSI, the distributor offering something unique — Service.

Adelaide 51 6483; Brisbane 52 4261; Melbourne 877 5311; Perth 328 8091; Sydney 439 8622

ETI May 1981 - 71



Ideas for Experimenters

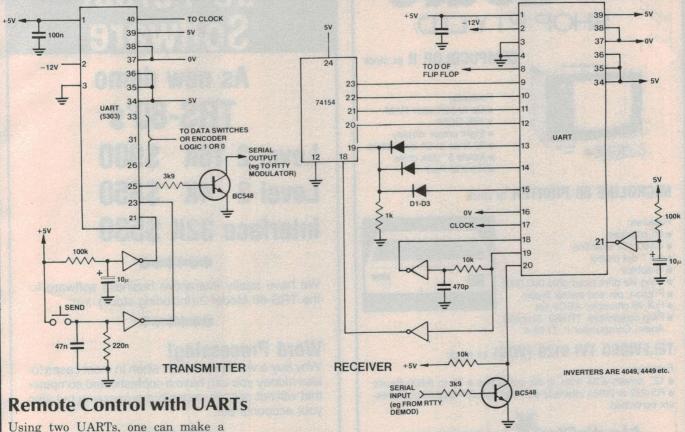

Using two UARTs, one can make a simple remote control system as Ralph Youie of Oakleigh in Victoria shows here. One UART is used as the transmitter and sends a binary word of, say, five bits. This word may be transmitted by radio, ultrasonics, infra-red etc. The receiver then converts the serial data into parallel data which can be decoded by logic devices, such as a 4-16 line decoder (74154). Each output of this decoder can be connected to the clock input of a 'D' type flip-flop, and the fifth bit can be connected to the 'D' input. Thus, a five-bit word programmed on the transmitter can control 16 flip-flops and hence 16 devices in two states. With a little more logic, one could control 16 devices in 16 states, 128 devices in two states, 64 devices in four states etc., using eight-bit words.

The circuit shown is just one possibility as many factors could be changed, such as clock rate, modulation system, word size, parity and transmission method to name a few. In the circuit, D1-D3 form an OR-gate which prevents the 74154 from operating if an error is found in the word received. Ralph used an RTTY system for the mod-demod and slide switches to program the code word

on the transmitter. However, a refined system could use a keypad with encoder.

Possibilities include remote control of television, hi-fi, solenoid tape decks, lights, garage doors etc...limited only by imagination.

UART pin connections:

1: Vss	2: Vgg	3: Vdd	4: RDE	5: RD 7
6: RD 6	7: RD 5	8: RD4	9: RD3	10: RD 2
11:RD1	12: RD 0	13: RPE	14: RFE	15: ROR
16: SWE	17: RCP	18: RDAR	19: RDA	20: RSI
21:MR	22: TBMI	23: TDS	24: TEOC	25: TSO
26:TD 0	27: TD 1	28: TD 2	29: TD 3	30: TD 4
31: TD 5	32: TD 6	33: TD 7	34: CS	35: NPB
36: NSB	37:NDB2	38: NBD 1	39: POE	40: TCP

RDE Receive Data Enable (tri-states data line)

SWE Status Word Enable

SWE Status Word Enai

RCP, TCP clock input

RPE, RFE, ROR parity, frame, and receive overrun errors.

MR master reset

NSB 1 or 2 stop bits

POE odd or even parity


RSI, TSO serial input, output

TDS send transmit data

NPB parity inhibit

NDB no of data bit 5,6,7 or 8

RDA, RDAR Received data, Received data reset

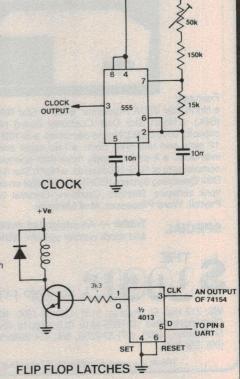

\$ THE LOGIC SHOP PTY, LTD.



COMPUCOLOR II ex stock

Features:

- Up to 32K user RAM
- 16K ROM
- Eight colour display
- 32 lines at 64 characters
- Inbuilt 5" disk drive
- RS-232 Port

MICROLINE 80 PRINTER ex stock

Features:

- 80 char/sec
- 40/80/132 char/line
- 9 x 7 dot matrix
- Graphics
- Long life print head (200,000,000)
- Friction, pin and tractor feeds
- Full 96 character ASCII set
- Plug compatible: TRS80, Sorcerer, Apple, Compucolor II, TI 99-4




TELEVIDEO TVI 912B (VDU) ex stock

Features:

• 12" screen • 24 lines at 80 characters • 75 to 9,600 Bauds • RS-232 or 20MA interface • Printer output Port • Microprocessor controlled.





Features:

● North Star Z80A Processor. ● North Star RAM memory board (64K). ● North Star Disk Controller Board (4 drives). ● Quad capacity drives (360K bytes per drive). ● S-100 motherboard with 12 slots and real time clock. ● Two serial and one parallel I/O interfaces. ● A power supply more than adequate to power a full complement of 12 S-100 boards. ● North Star Software — BASIC, Disk Operating System (DOS), and Monitor on diskette. ● Applications software: Debtors, Creditors, General Ledger, Inventory, Payroll, Word Processor, Mail Manager.

SPECIAL

Trader — An intergrated invoicing, accounting and stock control system. NOW AVAILABLE



VIC: 212 High St, Prahran, 3181. (03) 51-1950. NSW: 91 Regent St, Chippendale, 2008. (02) 699-4919. QLD: Shop 16, Civic Arcade, Adelaide St, Brisbane, 4000. (07) 31-2330. WA: 454 Williams St, Perth, 6000. (09) 328-7345.

TRS-80 is a registered trademark of Tandy Electronics

SALE - SALE - SALE

de Forest Software

As new demo TRS-80's

Level 2 16K \$900 Level 2 4K \$850 Interface 32K \$530

We have totally interactive business software for the TRS-80 Model 2 (Including stock)

Word Processing!

Why buy a word processor, when in most cases for less money you can have a sophisticated computer that will not only do your word processing but also your accounts etc.

"TRS80 Disk and other Mysteries"
Don't Boot-Up without it!
The 'How To' book of TRS-80 data recovery.

- 130 page, 81/2 x 11 sortcover
- Actual memory maps, samples
- Detailed recovery instructions
- Recover lost programs, DOS errors
- Fix parity, gat and hit errors
- Recover from unreadable directory
- Fix Electric Pencil file errors
- Recover lost or killed files

JUST \$22.50

Get it and unveil the many disk mysteries.

TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORP.

26 Station Street, Nunawading Melbourne 3131 (03) 877-6946

write or phone for our Catalogue.


Don't let technology pass you by!

Learn Microprocessor Programming and Application techniques



with the HEATHKIT Microprocessor Self-Instruction Program.

Microprocessor Trainer for EE-3401 Program



Functioning as a miniature digital computer, the ET-3400 Microprocessor Trainer is essential for the experiments in the EE-3401 selfinstruction program. After completing the program, the ET-3400 is ideal for breadboarding, prototyping and system design.

The ET-3400 features a built-in 1K ROM monitor program for controlling unit operation; 6-digit hexadecimal 7-segment LED display for address and data readout; 17-key hexadecimal keyboard for entering programs and data. Has 256 bytes of random access memory (RAM) built-in, expandable to 512 bytes with the RAM's supplied in the EE-3401 program. Also has 8 buffered binary LED's for display of breadboard logic states, 8 SPST DIP switches for binary input to breadboard circuits, a breadboarding socket for prototyping, interfacing and memory circuits.

All microprocessor address, control and data busses are buffered and terminated on the front panel for ease of connection to prototype circuits. There's also provision for a 40-pin external connector to extend memory and 1/0 capacity. Built-in +5, +12 and -12 volt power supplies.

Kit ET-3400

If you're involved in scientific or electronic pursuits, microprocessors are becoming a way of life and a dominant factor in your success or failure. The EE-3401/ET-3400 self-learning program and accompanying computer trainer is the easy, effective way to learn about these powerful devices. The program uses Heath's proven self-instructional techniques including programmed instructions and audio-visual aids to teach computer programming, microprocessor operation, interfacing and related topics.

This self-instruction program covers microprocessor basics, computer arithmetic, programming, interfacing and much more.

The microprocessor course is organised into 10 learning units as follows: 1: Number Systems & Codes, 2: Microcomputer Basics, 3: Computer Arithmetic, 4: Introduction to Programming, 5: The 6800 Microprocessor-Part 1, 6: The 6800 Microprocessor-Part 2, 7: Interfacing-Part 1, 8: Interfacing—Part 2, 9: Programming Experiments, 10: Interfacing Experiments. Each unit is complete with introduction, unit objectives, activity guide, experiment, examination and examination answers.

The EE-3401 is complete with 62 electronic components required to complete the experiments. These components include two 2112 256 x 4-bit RAM's, 6820 PIA interface chip, 1406 d/a converter, 741 and 301 op amps and a variety of other microprocessor-oriented devices. The ET-3400 Computer Trainer is required for the experiments in the Microprocessor Course

Course EE-3401

Microprocessor Trainer Accessory

The ETA-3400 gives you the additional 1/0 and memory you need to turn your ET-3400 Microprocessor Trainer into a complete, personal computer system. It provides an audio cassette interface so you can store programs on convenient cassettes. It also provides an additional 1K bytes of memory so you can run longer and more sophisticated programs through the ET3400. The memory can be expanded to 4K bytes with the optional 3K chip set (ETA-3400-1). A serial 1/0 with EIA 20mA loop format provided in the ETA-3400 accessory lets you hookup a video terminal

A tiny BASIC interpreter is provided in ROM to let you do actual programming using the BASIC language.

Kit ETA-3400 ETA-3400-1, Optional 3K Chip Set

\$270.00 \$ 86.00

ORDER BY COUPON NOW OR COME TO OUR SHOWROOM

Please rush me the Heathkit of my choice. My cheque for \$..... is enclosed plus \$7.00 for package and post.

Send to: W. F. Heathkit Centre

220 Park St., South Melb. 3205. Phone 699 4999.

□ Course EE-3401

☐ Kit ET-3400

☐ Kit ETA-3400

□ ETA-3400-1

☐ I'd like to know more about the full range of Heathkit Training Programmes and Prices. Please send to me, without obligation, my FREE catalogue and price list.

Credit Card No **Expiry Date**

Signature

minimum \$50

What's The Advantage Of Having Tandy Electronics In Your Workshop?



Basic Electricity 695 Each

SAVE \$302 Both For 1088

Volume I introduces electricity and cir-cuits and Volume II expands on electronic devices. 60-2019/20



Understanding Digital Electronics 795

Explains all you need to know about digital electronic devices, circuits, systems and more. 62-2010




Audio Output **Transformer**



Miniature size, 1000-ohm centre tapped primary. 8-ohm secondary. 1.9x1.5x 1.5cm. 273-1380

Power Transformers



150 Ceramic Discs

50WVDC. Contains 15 .005uf, 10 each of 100, 220, 470pF; .001, .002, .01, .02, .05, .1uF; 5 each of 5, 47, 68, 330pF; 25 other assorted styles. Sealed construction. Real value! 272-601

Archer-Pak Parts and Semiconductors only \$2.99 each!






9











6



Sunnamulan, way www.m. Tandy's Greater Efficiency and Value Make Our Parts and Components Stand Cat. Parts and Components Stand Out From the Rest!

50 Silicon switching diodes. 20 LED's Asstd. red, green and amber . 10 LED readout displays, asstd 12 Asstd. switches in many styles .
 Asstd. electrolytic capacitors . . .
 Asstd. voltage regulators

276-1608

276-1620 9. Asstd. Mini reed switches 271-1605 10. 15 General purpose transistors 276-1617 11. 25 Assorted zener diodes, 250 m . 276-1617 11. 25 Assorted zener diodes. 250 mW to 5 watts . 276-1622 12. 100 Disc capacitors, asstd. types . 276-1627 13. Pair LED digits common cathode

common anode 276-1629 . 272-801 276-1648 276-1628 . 272-803

275-1610 276-1603

1/4

Available at all Tandy Stores and Participating Dealers Around Australia



Mail Order Department P.O. Box 229, Rydalmere, N.S.W. 2116.

Shoparound

THIS PAGE is to assist readers in the continual search for components, kits and printed circuit boards for ETI projects. If you are looking for a particular component or project — check with our advertisers if it is not mentioned here.

First of all, readers requiring Scotch-cal panels for the projects in this issue, or past projects of recent vintage, should enquire with Rod Irving Electronics and All Electronic Components in Melbourne and Radio Despatch Service in Sydney. Printed circuit boards for all this month's projects and almost every project we've done in the past can be supplied by (apart from specific suppliers mentioned) RCS Radio, 651 Forest Rd, Bexley NSW; Radio Despatch Service, 869 George St, Sydney NSW; and All Electronic Components, 118 Lonsdale St, Melbourne Vic.


For subscribers in South East Asia we have news that Jemal Pty Ltd of Welshpool W.A., who stock most ETI pc boards and front panels, have appointed a distributor in Singapore. For your pc board and front panel requirements, contact Applied Digital Systems, 326 3rd Floor, Far East Shopping Centre, 546 Orchard Road, Singapore.

FTI-735 UHF TV converter

The OM350 wideband amp chip used in the RF stage was also used last month in the ETI-729 Masthead Amp. So far as we were aware at time of going to press, the following suppliers were stocking the OM350: in Melbourne — All Electronic Components, Ellistronics, Rod Irving Electronics and Tasman Electronics; in Sydney — Jaycar and Radio Despatch Service. Dick Smith has it listed in his latest cataloguue as Z-6185.

For the tuneable version of the converter, there are two sources of suitable tuning capacitors, as mentioned in the article. The C1604 capacitor is sold by David Reid Electronics stores — get the 14 pF type. It costs around \$7. The 15 pF Johnson capacitor is available from General Electronic Services of 99 Alexander St, Crows Nest NSW 2065. However, some kit suppliers may well be stocking this item, so check your favourite supplier first.

Note that this project requires a fibreglass pc board.

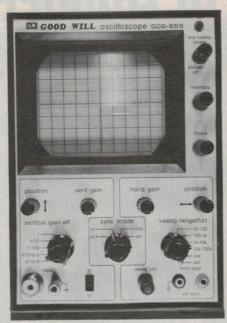

Emona Enterprises, who recently gained the Good Will Instruments agency, has released a 5" (130 mm) CRO featuring 6.5 MHz vertical amp bandwidth, 10 mV/div sensitivity, horizontal sweep from 10 Hz to 100 kHz, internal voltage and frequency calibration oscillator, and low cost. Called the Good Will GOS-955, it costs only \$255 (plus tax). The two-tone front panel has large, clear markings for the controls and is well laid out. Vertical input connector is an SO239 socket. We found the unit easy to use, with good synchronisation and trace brightness. It held lock on signals well beyond the bandwidth and would be worth considering for the 'serious' hobbyist. We hear the latest shipment sports a 7 MHz bandwidth. See Emona, Suite 208/661 George St, Sydney NSW 2000. (02)212-4815.

ETI-256 humidity meter

This unique, versatile little project is built around the Philips capacitive humidity sensor type 2322 691 90001. This is distributed by Sycom (offices in Sydney and Melbourne). At the time of going to press Radio Despatch Service in Sydney and All Electronic Components in Melbourne said they would be stocking the humidity sensor.

The two 47 pF positive temperature coefficient capacitors (100 parts per million — P100) will also be stocked by these two firms. All other components are widely stocked.

ETI-257 relay driver board

There's nothing out of the ordinary in this project and pc boards and components should be readily available. The board was laid out to accommodate the various popular double-pole relays available and you can fit the Fujitsu FRL621D012 (distributed by IRH Components), the Takamisawa VB 12STAN (distributed by Associated Controls) or the Pye 265/12/G2V.

Series 5000 heatsink panels

At time of going to press, the following firms had ordered or had in stock the front panel/heatsink for the MOSFET amplifier presented in the January, February and March issues: in Sydney — Electronic Agencies and Jaycar; in Melbourne — All Electronic Components, Rod Irving Electronics and Tasman Electronics.

Readers may also order the unit through the magazine. The cost is \$42.50, post paid within Australia. Send your cheque or money order to cover the number you require to:

Series 5000 Heatsink/Front Panel ETI Magazine 15 Boundary St Rushcutters Bay NSW 2011

Please allow up to four weeks for delivery.

Project price estimates

As some information on component pricing and availability could not be obtained until very late, we have not included the price estimates with the projects this month. As this page is usually the last to be done, we've included it here. Note that these prices are estimates only and not recommended prices. A variety of factors may affect the price of a project, such as quality of components purchased, type of pc board (fibreglass or phenolic base, tinned tracks, etc), type of front panel (if used) supplied, etc — whether bought as a kit or separate components.

ETI-735 UHF TV converter

	\$35 - \$40
- Single chamile version	
• tuneable version (plug pack not included)	\$52 - \$58
	\$21 - \$27
ETI-257 relay driver	\$10 - \$12

How many of these kids are equipped for the electronic world of tomorrow?



This century has seen remarkable advances in electronics. Advances which are now a part of every day living. As this continues into the next century, there will be the need for more education in electronics. A good basic knowledge of electronics is essential for those children who are to become our future technicians, programmers and so on. Without this knowledge, your child could be left in the dark, perhaps without a future career.

You can give your kids a head start in electronics; knowledge which is essential to the future of your children.

DICK SMITH'S FUN WAY INTO ELECTRONICS

can provide that essential knowledge-& what's more it's FUN! Give your child a start for \$195



Great kits from FUNWAY VOL 1.

Has all you need to make any of the projects descibed in Volume 1.

Projects 1-10 \$690 Cat. K-2600

Projects 11-20 \$750 Cat. K-2610

FUNWAY VOL 2 kits from only 6 7

Build many tascinating & worthwhile projects.
There are many to choose from!

Drop in today & pick up your FREE kit catalogue for more details!

DICK SMITH Electronics



SEE OUR OTHER ADS FOR FULL ADDRESS DETAILS



In your March issue, you presented a 'Short Circuit' of a Guitar Sustain, the active component of which was a Moto-MC3340P voltage controlled amplifier.

Having an immediate application for such a unit, I consulted the catalogues of Australia's two largest component retailers, to find neither stocked this vital component. In order to find a supplier, I contacted both Motorola agents. Neither had any stocks, and neither could

suggest alternative sources.

Consequently, I contacted your office by phone, and was given the name of two Melbourne stockists, whom you "had been told" carried stocks. Neither did. In desperation, I contacted eleven Sydney component retailers. Not one had current stocks, and only two ever carried stocks; one was just out of stock (around ten weeks' wait) and another was trying to find stocks

Sir, I find it absolutely incredible that a reputable magazine such as yours could publish a circuit using an essentially unavailable component. Your claim is that 'Short Circuits' are tested, but how could it be tested if the component is unavailable? Surely you have a responsibility to your readers to ensure components for your projects are available — if not, then the circuit should be altered to use a readily available component!

I am confident many other people were annoyed by this lack of planning on your part, and I for one will only continue to read your magazine because limiting my reading to your opposition alone will not allow me to keep up with new

developments.

Edwin Humphries Rockdale NSW

Firstly, the unavailability of the MC3340P was not due to "lack of planning" on our part. More likely, it was brought about by the swift action of other readers! However. I must commend your determination and resourcefulness in attempting to find a source of supply.

It is our standard practice whenever a project or Short Circuit is scheduled for a particular issue, to check the availability of components specified. With projects in particular, we often go to a great deal of trouble to ensure that, with components which are not standard stock lines, dis-

tributors and/or retailers will have them in stock by the time the issue goes on sale and for some time thereafter. We retain a freelance correspondent in Melbourne to assist us in this task. Our publishing schedules are such that the contents of a particular issue are finalised about three months ahead. This means that the Guitar Sustain item was readied for production in December and artwork was prepared in January. In mid-January I rang suppliers and distributors to check on availability of components scheduled for projects etc. in the March issue. From memory, some three suppliers indicated they had stocks, so the Guitar Sustain was considered a 'goer'. Now, consider that there is a period of some six to seven weeks from the time the check is made to the time an issue goes on sale. It is just not feasible to check component availability and alter the contents of an issue if supplies of an item dry up, any closer to the publishing date than that. It seems that what stocks there were of the MC3340P had sold out in the interim or very shortly after the March issue went on

As you would appreciate, although we can advise suppliers that particular components will appear in the magazine, we have no control over their stocking policies. You would also appreciate that they are in the component marketplace 'taking a punt' as it were on how many units of each device stocked they will sell to obtain a reasonable return over a period of time. If there is a sudden upsurge in demand and their punt on sales was well below that demand, then clearly their stocks will rapidly run out. The same applies to distributors — in fact, their planning and setting of stock levels is generally much more rigid than that of retailers. For this very reason, we recently introduced a scheme - at the request of several major distributors - to advise distributors up to four months in advance of semiconductors and 'special' components planned for projects in forthcoming issues. We hope this scheme will go a long way towards alleviating such problems as you found.

Returning to your letter, in your fourth paragraph you say you find it "absolutely incredible" we could publish a circuit "using an essentially unavailable component". According to our usual prepublication check, the component was available! As you can see from the

foregoing explanation, we take our responsibility to readers seriously with regard to component availability.

Perhaps I can throw the ball back in your court in finishing. Semiconductors are readily and speedily obtainable from overseas if you find them in short supply in Australia, and many resourceful hobbyists use this avenue when necessary (some as a matter of course!). For example, recent issues of English electronics hobbyist magazines (available locally in many newsagents and technical book stores) — Wireless World, for example - carry advertisements which list the MC3340P for sale at 120 pence. Two advertisers I'm looking at as I write this are: Watford Electronics, 33/35 Cardiff Rd, Watford, Herts, UK, and Technomatic Ltd. 17 Burnley Rd, London W10, UK. An international money order or bank draft in pounds sterling for about \$3 would secure one by return airmail accompanied by a flyer or catalogue, like as not!

Australia represents a very small market in the electronic component business, despite generally good representation by local firms. For those components which are not consumed in relatively large quantities - unlike 1N914s and 555s, for example — the local stock level is likely to be guite small and supply delays quite long. When there's a 'run' on such components, there'll be disappointed and frustrated customers (or ex-customers!), and there's not a great deal we can do to prevent it, apart from the advance notification and checking system we already employ.

As of 20 March, VSI advised that stocks of the MC3340P were expected in six weeks but they were holding no back orders. Soanar advised that their Melbourne head office had 50 units and that more were expected in around four to five

If you're desperate to build a guitar sustain unit, I would recommend our Project 454, published in the April 1980 issue - which is a combined fuzz and sustain unit to provide sustain alone, fuzz alone or fuzz and sustain. The pc board, semiconductors and suitable other components for this project are normally stocked by Radio Despatch Service in Sydney, while All Electronic Components in Melbourne stock a kit.

Roger Harrison Editor

Your eminent correspondent "Depresst C-Ber" (ETI, Jan. 1981) has most aptly demonstrated the reason why CB is known as the 'Cretins' Band'. Enough

"V.K."



Yaesu call this their 'total performance VHF computerized transceiver'. You get FM,SSB 8

over the full 2 metre band. If you want the best, you want the remarkable FT 480R D-2887





7-287 P&P EXTRA

DICK SMITH Electronics



SEE OUR OTHER ADS FOR **FULL ADDRESS DETAILS**

BUMUNIBATURS

More VHF TV channels could be placed here if channels VHF station, as is the running cost. sought

F.A.C.T.S. seek the facts

The Federation of Australian Television Stations hosted a seminar in mid-March aimed at examining the avenues available to TV broadcasters who are seeking to expand or continue to provide the range of programme choices now enjoyed by the majority of Australians.

the first in a proposed series, social, economic, political, demo-FACTS said, "There has been a graphic and technical aspects of the lot of discussion during the past couple of years about the future possibilities for television ... some ... proposals will put to the efforts of FACTS to catalyse further pressure on available frequencies whilst others may tend to alleviate the problem.

the 1974 McLean Report recommendation to allocate Band II (88-108 MHz) to FM sound broad- moving channel 0 down by 1 MHz casting and an obligation to vacate (putting the 6m amateur band bechannel 5A at some future date, the the Huxley Committee have been a channel above channel 2, between effectively reduced to 9 or 10.

'It seems reasonable to assert -

services would be possible - by satellite distribution, as one factor and that the General World that by announcing that the Prime Administrative Radio Conference Minister had decreed that 5A was to (WARC '79) held in Geneva in late go. Full stop. No time scale was 1979 would provide an opportunity for Australia to put its frequency 5A out, but added channel 3, to be allocations house in order, FACTS allocated on a regional basis, so as began pressing the Government for not to interfere with FM broadaction in June 1978.

"The consistent request, reto allocate frequencies for a defined 208 MHz were removed, channel 13

In introducing the seminar, number of services, but to look at auestion.

'Nothing has happened."

That provides some background some discussion on the question. Basically, what is sought is a 12-channel system in VHF Bands I 'Considered with the adoption of and III. A variety of proposals were put and discussed at the seminar. Proposal 'a' for Band I involved tween 51 and 53 MHz) and channels 13 channels determined in 1961 by 1 and 2 down by 3 MHz, plus adding 67 MHz and 74 MHz. Apparently, many tuners will not cope with this. and it can be proven — that more Proposal 'b' for Band I left channel 0 than 9 (or 10) VHF channels are in place, added a channel between needed to continue to provide the 52 MHz and 59 MHz (eliminating the programme choices now enjoyed amateur 6m band — oh, horror!) by the majority of Australians and and moving channels 1 and 2 up which are more or less promised for 3 MHz. Same problem as Proposal 'a'. Proposal 'c' left Band I alone but "In the knowledge that new required the retention of 5A. Jim Wilkinson of the Australian Broadcasting Tribunal put the kibosh on proposed, though. Proposal 'd' left casting.

In Band III, the proposal put it that peated many times since then, has two extra channels could be gained been for an enquiry to determine the (channels 12 and 13). Firstly, if the future needs of the Australian public present fixed and mobile and DME for broadcasting services — not just stations between 202 MHz and

10 and 11 were moved up 1 MHz. Secondly, by clearing 223 MHz to 230 MHz of the current DME and government services, channel 12 could be placed in this region. Most current and past TV front ends could cope with this, it seems.

A number of hitherto unpublicised problems with both VHF and UHF broadcasting came out at the seminar. Firstly, Band I (channels 0, 1, 2) stations have many problems. Channel 0 especially has propagation, reception (antenna) and interference problems. All Band I stations will have difficulty with Teletext transmissions owing to propagation distortion causing errors which are unacceptable. Indeed, the ABC (channel 2) is running trials with the French Antiope system in an effort to overcome the problem.

To provide appropriate signal levels and coverage similar to that of VHF stations, UHF stations have to run around three times the e.r.p., it seems. Also, capital cost of a UHF coder will suit the system finally station is around four times that of a agreed on."

Roger Harrison

* Stop Press! *

Announcing the start of ABC trials of the French Antiope data broadcasting system on April 6, the Minister for Communications, Mr Sinclair, said it would enable comparison with the UK Teletext system.

"It is important to try as many systems as possible before deciding on the most suitable system for Australia," the Minister said.

'Factors which must be taken inconsideration include the reliability of the system, its cost to the consumer and operator, and its suitability for providing captioning for the hearing impaired."

He re-affirmed Mr Tony Staley's February 1980 statement that the system would be reviewed at the end of three

"Anyone purchasing decoding devices suitable to one of the systems being tested over that period should realise that there is no guarantee at this stage that their de-

Fortnightly propagation predictions

George Jacobs, well-known US radio amateur and propagation expert, offers a propagation prediction service.

Available on subscription for US\$25, the publication, Mail-a- stocked locally. Prop. is published and distributed Maryland USA MD20902.

address above. We've not seen it bands.

Don't forget that the NSW Dievery two weeks. Enquiries should vision of the Wireless Institute of be directed to George Jacobs, Mail- Australia includes a weekly propaa-Prop, Box 1714, Silver Spring, gation report and forecast in its Sunday morning broadcasts at George also has his new book for 11 am EAST on the 3.5 MHz, 7 MHz sale, Shortwave Propagation Hand- 28 MHz, 52 MHz, and 144 MHz book, for US\$7.95. Enquiries to bands and via relay stations on other

500 MHz quartz crystals!

A technique for producing quartz crystals so thin that they vibrate at a fundamental frequency of 525 MHz has been put into pilot production by the Compagnie d'Electronique et de Piézo-Electricité (CEPE).

A Thomson-CSF subsidiary, based in Sartrouville, near Versailles, the firm starts with quartz slices lapped to a thickness of some 33 μm , equivalent to a 50 MHz fundamental, and then thins them down by ion bombardment to about 3.2 µm and a 525 MHz fundamental — the highest yet, says CEPE.

Though chips as thin as this are still experimental, the French firm expects to produce industrial versions with fundamental frequencies of

MR BUSINESSMAN!

here at last from DICK SMITH is a

STOCK CONTROL &
PRICING SYSTEM

program suits DICK SMITH SYSTEM 80 micro computer

especially designed for Australian conditions

No, not just another software package imported from overseas, but one that has been written (at great expense)

by Australians for Australian businesses

In fact it has been modelled closely on the Stock Control and Pricing System used so successfully by Dick Smith Electronics.

The original system runs on an IBM computer costing more than \$50,000 — but you can have the same benefits for less than one tenth of this cost (yes, for both the computer hardware and the software!)

While you're in one of our stores why not check out the many features of the System 80 and its peripherals?

You, and your business can benefit from this amazing system for less than you think!

HERE ARE JUST SOME OF ITS OUTSTANDING FEATURES

Cat X-3750

- Capacity for up to 1200 stock lines!
- Machine-language sorting for FAST operation!
- Ability to print out price lists as well as stock status reports and other listings (all dated!)
- Fast stock and financial status reports on the screen!
- Simple "menu-driven" operation no special training required!
- Prints out stock count sheets for stocktaking, then gives you a printed analysis of all discrepencies!
- Special Australian Sales Tax feature (optional)!
- Easily expandable so you're not forced to change to another system as your business expands!

\$275!

(Program & Data Disks with comprehensive User Manual)

The full Dick Smith business computer system includes computer, monitor, disk-drives, expansion interface, large memory, cables, etc. — costs just \$3,480.00. So with SCAP you can have a superb operating system for well under \$4,000!!!

DICK SMITH Electronics



SEE OUR OTHER ADS FOR FULL ADDRESS DETAILS



If your present tobacco just doesn't deliver the satisfaction you want, then roll a Cannon.


A rich new blend of medium dark cigarette tobacco that's just a little bit stronger.

Cannon, for the taste you're missing out on now.

CANNON. SLIGHTLY STRONGER.



Sooner or later you'll need a Gregory's.

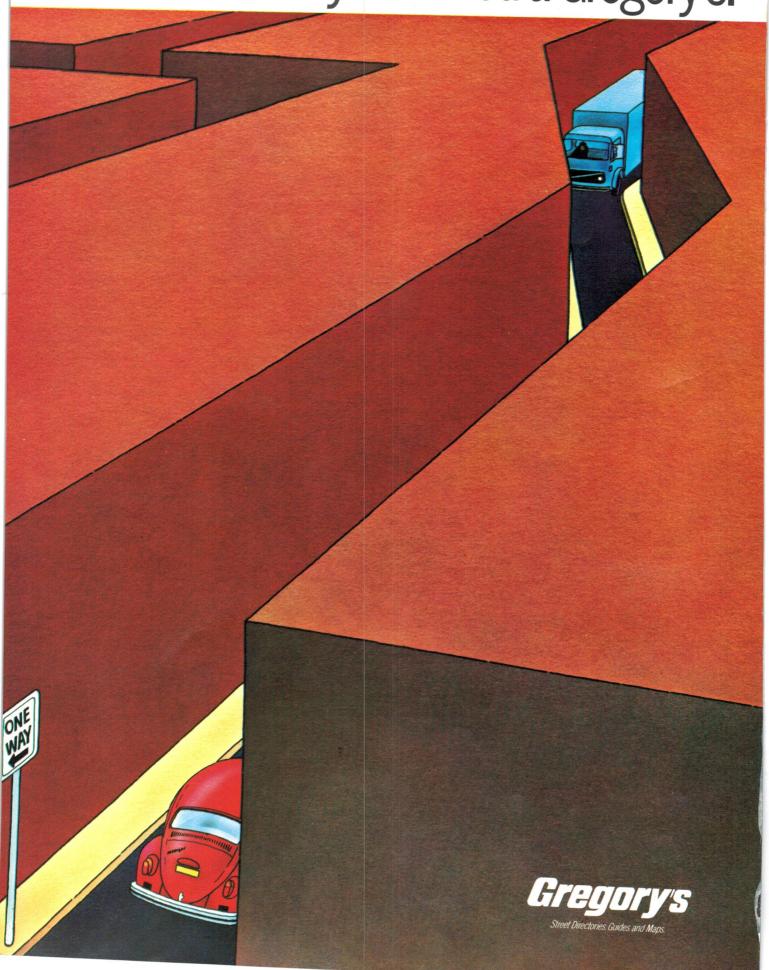

COMPUTING TODAY

Say it again, RAM!

The DT1000, a fully assembled circuit board containing all the components necessary to output speech upon demand, is now available from National Semiconductors.

chip, in either an end or stand- the original person's voice. alone product, and requires only operation.

various functions of the board.

The two speech ROMs enable the and silence durations into phrases information.

The DT1000 evaluates the and sentences. The speech quality operation and application of the reproduced is claimed to be very Digitalker speech synthesis realistic, even sounding much like

The Digitalker is claimed to have a 9 V power supply and an the unique function of reproducing inexpensive speaker for inflection and intonation of the original speech, not just the words spoken; the speaker is even said to It contains National's speech be clearly recognisable. This feature processor chip, two speech ROMs is regarded as important in applicacontaining 138 individual words, tions where the general public is output filter, audio amplifier, key- listening to speech produced by the board and a COPS microcontroller system — in telecommunications, and EPROM that contain stored instruments, control systems, applidata programmed to provide the ances, and even in toys and games and car dashboards!

Contact National Semiconductor user to link words consisting of Australia Pty Ltd, cnr. Stud Rd and numbers and letters of the alphabet, Mountain Highway, Bayswater Vic. assorted useful nouns, verbs, tones 3153, (03)729-6333, for more

Z80 and Pascal-100 marry on S100 buss


The Pascal-100, a new two-board central processing unit, combines a Z80-type microprocessor and Western Digital's Pascal Microengine to yield five to ten times faster execution times than a Pascal-programmed Z80 alone.

The CPU is compatible with the processor system is compatibility processor - in this case an 8-bit which accesses the 16-bit prounit.

A key advantage of the dual-

S100 computer buss and, accord- with existing applications software ing to its developers, Digicomp written for 8-bit Z80- or 8080-based Research Inc, Ithaca, New York, may systems or those using the CP/M be the first 16-bit microengine to be operating system, as well as with combined with another micro- new software like UCSD Pascal, cessor's larger address space.

The Pascal-100 costs US\$1485.

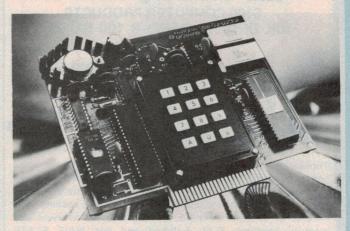

Crusading Computercamp

May 9-16 1981 has been scheduled for the third Computercamp, where high school students from Years 10-12 can learn to program computers and computer applications.

along their own machines.

and many others.

The camp, run by the Crusader Union of NSW, has a Christian Mr A. Potter, (02)95-6926.

Computers of the table-top emphasis and seeks to present the variety have been made available by Christian message in an environvarious computer houses and edu- ment which is up to date with the cational institutions, and in the past latest technology and will also allow some students have even brought students to pursue an interesting and challenging activity.

Newcomers to computing are Set in a bushland site at Galston, taught how to program in BASIC in the camp also provides for such a series of graded exercises. After activities as outdoor games, hikes only one week's camp some and barbecues. Numbers will be students have been able to produce limited to 40 (possibly 20 boys and quite sophisticated programs, such 20 girls), and 13 of last year's as motor trajectories, dodging of campers have already reapplied. random land mines, Hammurabi, The camp caters for all grades from beginner to expert.

Enquiries should be directed to



Low cost Commodore


Trying to bridge the gap between the hobbyist and small-business computers, Commodore Business Machines introduced a US\$300 colour graphics computer at the January US Consumer Electronics Show.

Called the VIC 20, it contains a video interface chip that allows it to display material on an ordinary TV set through an external RF modulator. However, the display is limited to 23 lines of 22 characters each. The VIC 20 uses Pet BASIC.

ECTRONICS

HIGH ST., NORTHCU

S100 COMPUTER PRODUCTS 16K EPROM CARD-S 100 BUSS



\$89.50

KIT

FIRST TIME OFFERED! BLANK PC BOARD - \$39

USES 2708's!

Thousands of personal and business systems around the world use this board with complete satisfaction. Puts 16K of software on line at ALL TIMES! Kit features a top quality soldermasked and silk-screened PC board and first run parts and sockets. Any number of EPROM locations may be disabled to avoid any memory conflicts. Fully buffered and has WAIT STATE capabilities

OUR 450 NS 2708'S ARE \$8.95 EA. WITH PURCHASE OF KIT

ASSEMBLED AND FULLY TESTED ADD \$36

BLANK PC BOARD W/DATA\$49

LOW PROFILE SOCKET SET\$19


SUPPORT IC'S & CAPS. \$27

ASSEMBLED & TESTED-ADD \$30

OUR #1 SELLING

16K STATIC RAM KIT-S 100 BUSS

KIT \$249 A&T \$279



KIT FEATURES:

 Addressable as four separate 4K Blocks.
 ON BOARD BANK SELECT circuitry. (Cronemco Standard!). Allows up to 512K on line! 3. Uses 2114 (450NS) 4K Static Rams.

 ON BOARD SELECTABLE WAIT STATES.
 Double sided PC Board, with solder mask and silk screened layout. Gold plated contact fingers All address and data lines fully buffered.

Kit includes ALL parts and sockets

PHANTOM is jumpered to PIN 67

9. LOW POWER: under 1.5 amps TYPICAL from the +8 Volt Buss

10. Blank PC Board can be populated as any multiple of 4K

RAM BOARD!

TOH Model 8300 PRINTER. \$810 plus 15 percent sales tax.

This 80-column printer provides quiet operation, making it suitable for use in offices. classrooms and homes. Specifications include 125 cps, 60 lines per minute, paper loading from bottom or rear and Centronics-compatible parallel interface.

A bi-directional, dot matrix impact printer with a print head designed for 100 percent duty operation, assuring a print life that exceeds 100 million characters. The precision sprocketoperation, assuring a print rije that exceeds 100 million characters. The precision sprocket-feed mechanism permits printing forms from 4½ to 9½ inches wide. A 96 ASCII character set prints in upper and lower case with the added capability of producing double-width fonts in bold face. The vertical format unit provides preprogrammed/programmable tab positions, top of form and bottom of form for complete formatting capabilities.

ETI636 7-SLOT MOTHERBOARD WITH ACTIVE TERMINATION

Kit of Parts \$79.00. Assembled and tested \$105.99 (inc. tax), RITRON COMPUTER GRADE POWER SUPPLY: 5V Reg, 10A, 16V Unreg. Kit of parts \$79.95 inc. tax. A&T \$99.95 inc. tax. Write for list of other power supplies. Tax free prices also available.

JUST WRAP KIT - JWK-6 \$39.50.

50ft ea. blue, white, red, yellow wire. Just Wrap Tool. Unwrap Tool


Australia's first under \$300 COMPUTER...

FEATURES:

Includes leads etc Basic on board in PROM unique basic interpreter affords single key functions up to 26 string handling powerful editor high resolution graphics. All documentation included single ROM contains basic interpreter cha gen, operating system and monitor less RAM required due to large PROM expandable to 16K small compact size connect your TV direct and cassette recorder and you're away



32K S-100 EPROM CARD



KIT USES 2716 Blank PC Boards - \$45 **ASSEMBLED & TESTED ADD \$30**

KIT FEATURES

. Uses+5V only 2716 (2Kx8) EPROM's . Allows up to 32K of software on line. . IEEE S-100 Compatible. . Addressable as two independent 16K

blocks.

5. Cromemco extended or Northstar

6. On board wait state circuitry if needed.

7. Any or all EPROM locations can be disabled.

8. Double sided PC board solder

masked silk-screened.

9. Gold plated contact fingers.

10. Unselected EPROM's automatically

powered down for low power.

11. Fully buffered and bypassed.

12. Easy and quick to asssemble.

SPECIAL: 2716 EPROM's (450 NS) are \$11 ea. with above kit.

16K STATIC RAM SS-50 BUS


PRICE CUT! | DR

\$229

FULLY STATIC AT DYNAMIC PRICES

FOR SWTPC 6800 BUS!

ASSEMBLED AND TESTED - \$30



KIT FEATURES

Addressable or 16K boundaries

1. Addressable or 16K boundaries

2. Uses 2114 Static Ram

3. Runs at full speed

4. Double sided PC Board, solder mask and silk-screened layout. Gold fingers

5. All parts and sockets included.

6. Low power under 1.5 Amps Typical

BLANK PC BOARD — \$45 COMPLETE SOCKET SET — \$19 SUPPORT IC'S AND CAPS — \$45

AVAILABLE AGAIN

 16K Dynamic Ram Board
 Fully Expandable to 64K
 Assembled, tested and guaranteed S100 compatible

16K Dynamic RAM, Board assembled and tested: Special \$269 plus tax (2mHz), \$299 plus tax (4mHz). This must be the best offer available on quality tested dynamic RAM Boards.

32K Assembled and tested \$309 plus tax (2mHz); \$339 plus tax (4mHz) 48K Assembled and tested \$349 plus tax (2mHz); \$379 plus tax (4mHz) 64K Assembled and tested \$389 plus tax (2mHz); \$419 plus tax (4mHz).

General enquiries (03) 489-8131. Mail order enquiries (03) 481-1436. Ritronics Wholesale (03) 489-7099. Please debit my Bankcard

Prices current till June 7, 1981. Heavier items add additional postage. Extra heavy items sent Comet freight on. Prices subject to change without notice. Send 60c and SAE for free catalogues. MAIL ORDERS PO Box 135, Northcote, Vic 3070. Minimum pack and post \$1.

Bankcard No. **Expiry Date** Name Signature

ET15/81

ROD IRVING ELECTRONICS

425 HIGH STREET, NORTHCOTE 3070, MELBOURNE VICTORIA. Ph. (03) 489 8131.

NEW PRODUCTS



JUST WRAP Replacement Wire

Part No.	Color	Price
R-JW-B	Blue 50 ft. roll	\$4.99
R-JW-W	White 50 ft. roll	499
R-JW-Y	Yellow 50 ft. roll	499
D IW D	Dad E0 (s val)	100

SCOTCHCAL FRONT PANELS FOR ETI & EA PROJECTS:

ETI 452 Guitar Practice Amp Series 4000 Any colour MOVING Coil Pre Amp 577 Power Supply 455 Loud speaker protector Variable power supply Linear ohmeter Muscle activity meter scale ETI 576 Electromyogram 561 Metal Detector EA Capacitance meter EA Slave flash exposure meter EA Slave flash EA Slave flash EA Playmaster graphic analyser EA Metal Detector 79md9 EA Pulse generator EA Square wave oscillator EA RF Z Bridge EA Thyristor tester EA Quartz frequency ref. EA Mutil monitor EA Experimenters Supply EA Quiz master EA Variable wiper delay	\$4.80 \$12.50 \$2.00 \$2.70 \$2.70 \$2.50 \$1.40 \$3.50 \$4.25 \$3.50 \$4.25 \$3.50 \$4.25 \$3.50 \$4.25 \$3.25 \$4.25 \$3.25 \$4.25 \$3.25 \$4.25 \$3.25 \$4.25
EA Playmate stereo Amp	\$4.50

ALL FRONT PANELS AVAILABLE FROM DAY OF RELEASE OF MAGAZINES WHEN ORDERING FRONT PANELS. SPECIFY COLOUR OF LETTERING FIRST, THEN COLOUR OF BACKGROUND.

10 TURN POTENTIOMETERS

Stock resistance values

50R, 100R, 200R, 500R, 1K, 2K, 5K, 10K, 20K, 50K,

Spectrol model 534 1/4" shaft. \$8.50 Price 1-9

10 + values may be mixed \$7.90

EPROM PROGRAMMER KIT

Kit of parts as featured in Electronics Australia July, 1980. Programs 2708, 2716 and 2532. Use with TRS80, Sorcerer, and Compucolor. Kit does not include connector from the programmer to computer

\$72.49 \$59.99 Kit without case Pack and post

DIG CAPACITANCE METER

Kit of parts featured in Electronics Australia March, 1980. Four digits \$52.49 \$39.99 Complete Kit Kit without case \$2.50

COMPONENTS

4116 RAMS	\$3.00
2114 RAMS	2.90
2708 EPROM	6.90
741's 10 up	2.50
555's 10 up	2.90
BD139 10 up	5.50
BD140 10 up	5.50
SC141D 10 up	11.00
SC151D 10 up	21.10
RED LEDS 10 up	1.40
RED LEDS 100 up	11.00
YELLOW LEDS 10 up	2.30
8 PIN I/C SKTS 10 up	2.00
BC548 0	.15 ea.
BC549).19 ea
MJ802	3.60
6.800/50V CAPS (LUG)	4.50
5.600/40V CAPS (PCB)	1.90
3,000/407 04/0 1/00/	

KITS & CIRCUIT BOARDS

ETI SERIES 4000 AIVIP
• Complete Kit
Quality front panel to
suit above
• ETI 470 kit of parts
ETI 480 kit of parts 100w
(incl. bracket) 19.75
• ETI 470 PS kit of parts 19.50
(includes relay, not transformer)
• Transformer to suit 22.90
• ETI 471 pre-amp 45.50
ETI 585R ultra sonic RX 15.95
ETI 585T ultra sonic TX 8.95
• EA 79 SF9 sound flash
trigger 15.00
All parts available for DREAM com-
puter project.

 P.C.B.'s (all quality fibreglass boards) ETI 574 disco strobe 2 80 FTI 549A metal detector DREAM circuit board 10.90



SCHUGART SA 400 5in Minifloppy Drive \$399.00 Tax Inc \$347.00 ex

RITRON COMPUTER GRADE P/S +5V reg 10a 16V unreg (a 1A KIT \$79.95 inc Built and tested \$99.50

ETI636 MOTHERBOARD 7 Slot Motherboard \$90.00 Built and Tested \$120.00 ACTIVELY, TERMINATED

INTERSIL LCD 31/2 DIGIT PANEL METER KITS

Build a working DPM in 1/2-hour with these complete evaluation kits.

Test these new parts for yourself with intersil's low cost prototyping kits complete with A/D converter and LCD display (for the 7106) or LED display (for the 7107). Kits provide all matrials including PC board, for a functioning panel meter ICL7106EV (LCD).

COMPUTER COMPONENTS

Attention Sorcerer & TRS 80 owners. Memory expansion kits available. We also offer full service on the popular computer projects and systems.

SPECIAL 4116 RAM OFFER 8 OFF PRIME SPEC 4116 I/Cs \$23.00 16 4116s for \$40.00

STATIC RAM KIT 16K S-100 2114 \$2.90; 2716 \$11.00; 2708 \$6.90

DIP PLUGS

Ideal for use with flat ribbon cable or to mount components on 14 pin \$1.20 16 pin \$1.40

\$35.50

\$1.30

\$1.20

100K 7318

24 pin \$1,20

POWER TRANSFORMERS SPECIALLY DESIGNED FOR

MICROCOMPUTERS

- Good regulation electrostatic shield
- RI 810 8V@10A2x15V@1A \$24.50 • RI 820 8V @ 20A 15V @ 1A 15V (# 3A

20 TURN CERMET TRIM POT

SPECTROL 43P ACTUAL SIZE

STOCK RESISTANCE VALUES 10R, 20R, 50R, 100R, 200R, 500R, 1K 2K, 5K, 10K, 20K, 50K, 100K, 200K, 500K, 1M, 2M. \$1.40

1_9 10-99 100 Values may be mixed

Hexadecimal Keypad

\$24.50/each



19-key pad in-cludes 1-10 keys ABLDEF and 2 optional keys and a shift key

ideal for dream project

MULTIDIALS



Dials to suit 10 T Pots Model 21 1.8" dia Model 16 9" dia Model 18 1" x 1.75" dia



COMPUTER COOLING FANS

Muffin fan 45%" square 110V \$39.50 240V \$26.50

Range of larger fans available. Send for details.

cermet single TURN TRIM POT

Spectrol model 63P ACTUAL SIZE

STOCK VALUES 10R. 20R. 50R. 100R. 200R. 500R. 1K, 2K, 5K, 10K, 20K, 50K, 200K, 500K, 1M. 2M.

1-9 \$1.00 0.90 10-99 0.80

Values may be mixed.

P.C. EDGE CONNECTORS



S100 gold plated wire wrap \$6.90 S100 solder tail D2 Motorola bus \$8 50 43/B6 solder tail 43/86 gold plated wire wrap \$10.50

ELECTRONIC AUSTRALIA MICROCOMPUTER PROJECT Kit for main board (including

programme 2708) \$109.00 Also available re-designed

6802 PCB \$11.90 \$10.90 PCB (Fibre glass) only 2708 programmed \$15.50 Key Pad 19 Keys \$24.50 Kit (less key pad) \$94.00 \$3.50 PCB for power supply

HEAVIER ITEMS ADD ADDITIONAL POSTAGE EXTRA HEAVY ITEMS SENT COMET FREIGHT ON PRICES SUBJECT TO CHANGE WITHOUT NOTICE. SEND 60c & SAE FOR FREE CATALOGUE MAIL ORDERS: PO BOX 135, NORTHCOTE, VIC 3070. MIN PACK & POST \$1.00

Printout

In 1981, it's the ZX81!

Sinclair Research has done it again — only this time around, a little more refined. In April, their newest 'personal' computer hit the market — the amazing ZX81.

This new machine is a much-upgraded version of the ZX80, incorporating an 8K BASIC ROM, higher speed Z80A processor and using a mere four chips compared to the ZX80's 21!

The ZX81 retains the one-touch key word entry feature of the ZX80 plus the graphdrawing and display facilities. The ZX81 will do animated graphics, though, according to the information from Sinclair Research. It also includes a randomise function (as per the ZX80) which is said to be useful for games amongst other things. With the ZX81 you can LOAD and SAVE named programs on cassette.

The ZX81 is priced at around STG&70, which probably translates to \$200 here.

But there's more! Sinclair has announced they will have their long-awaited ZX Printer available sometime around midyear for a price around STG&50. The ZX81 can drive it directly, while you'll need the 8K drop-in BASIC ROM in your ZX80 to drive the ZX printer.

We await the arrival of these goodies with a great deal of interest



APF 1M-1 for Australia

The Radio Parts Group of Melbourne and Calculator Discounts, also of Melbourne, are the joint Australian importers of this little four-colour wonder that comes from Hong Kong.

The APF 1M-1 has already taken on very well in the American market, and for the price of \$995.00 (including sales tax) should do very well in Australia; it is certainly some of the best value for money seen to date.

For your \$995.00 you get:

MP 1000 microprocessor programmable TV game. Plays on black and white or colour TV. Has two remote hand-held controls with keyboards and joysticks for various types of games.

MPA10 computer module companion. Converts MP-1000 to full user programmable personal computer. Full typewriter keyboard, cassette

deck. We hear that those clever Chinese have solved all the loading problems sometimes associated with the low end of the computer market. **TV Monitor.** A 13-inch colour unit that gives excellent colour resolution for graphics and games.

Probably the best feature of this new computer is that it can be added to with a number of peripherals. Peripherals available to date include:

BB-1 expansion unit with printer interface.

80-column printer (approx. \$575).

BB-s expansion unit with mini-floppy interface.

R-8K RAM memory expansion.

D100 disk drives.

All these peripherals are of moderate price, and a complete system is available for use at schools and in business for \$3049.

Watch ETI for coming review — we're looking forward to getting our hands on this one.

64K CMOS static RAM a first from Toshiba

Toshiba may be the first chip maker to introduce a complementary MOS 64K static random-access memory.

standby. Wafer steppers and 2- idling. micrometre features have been used for the first pass on the RAM, be in production with a 64K

away, but this year the Japanese out that matches Intel's.

Now in development is an 8K-by- company will supply samples of the 8-bit 28-pin device with cells that 8049 single-chip microcomputer, measure 15 by 19 micrometres on also in CMOS. With 3-micrometre a 4.6 by 6.55 mm (46 700 sq. mil.) rules, that chip will measure 22.8 mm² (35 350 sq. mil.) and Power dissipation is 50 mW draw 50 mW for active operation active and just 100 microwatts on and only 50 to 500 microwatts while

Later this year, Toshiba will also which has no redundant elements. erasable programmable read-only The 64K static RAM is over a year memory — in n-MOS — with a pin-



New store for AED

AED Microcomputer Products recently announced the opening of their new store at 130 Military Road, Guildford NSW 2161.

offices and a seminar room.

AED handle what they believe to the Sorcerer to 'Rolls Royce' 4 MHz customer's order. S100 machines. Epson Base 2 and Spinwriter daisy wheel units.

This new store is only seven doors AED are S100 and CP/M away from their old establishment, specialists, from complete combut they say it is eight times larger puters through add-on disks, S100 and boasts a large, airy showroom, cards, etc, to prototype equipment administration offices, workshops, and parts. Available software covers development laboratories, design all areas of microcomputing, including word processing and business applications.

A full range of magazines is be the largest range of \$100, CP/M always available, and special parts and related products in Australia. or software, not normally available Complete computers range from in Australia, can be imported to the

For further information contact Iton dot matrix printers are available, Acoustic Electronic Developments together with TEK and the NEC Pty Ltd on (02)632-6301 or (02)632-4966.

New floppy disk system

AED Microcomputer Products of Guildford, NSW, have just released a new floppy disk system for S100 computers.

steel case that matches the or stacked. 'VN-Serial" terminal.

version of the tried and proven troller, and the system integrates Morrow (MR IEEE S100) disk perfectly with the Morrow 10M and jockey 20. Drives and controllers are 26M hard drive systems. available separately, although the available at no extra charge.

will still handle single-sided, single 632-4966.

Priced about midway between the density disks, for example for softusual single and double-sided ware installation, etc. Both single systems, AEDisk is a double-sided, and dual drive systems are in fact double density 8" system using YE available; in the latter case the drives data drives. These are housed in a may be supplied in separate cases polished timber and vinyl-coated or in a single case, either side by side

Up to four floppy drives can be The controller used is the latest accommodated on the one con-

For information on these and complete package includes CP/M other S100, CP/M and related 2.2, and a special version is also products, contact Acoustic Electronic Developments Pty Ltd, 130 Capacity per disk is a maximum Military Road, Guildford NSW of 1.2M (DS, DD), but the system 2161. Phone (02) 632-6301, (02)

Bubble cassettes

Although at present more costly than other magnetic media, bubble memory technology offers microprocessor-based systems a unique combination of non-volatility, long-term reliability, and data integrity, even in harsh environments. Now National Semiconductor is adding several other dimensions to the technology with the development of a magnetic bubble memory cassette

automatically accepts magnetic about 100K to 1M in capacity.

According to Frank Stempski, product marketing manager for magnetic bubble products, the system was developed in response to the need for a removable, nonvolatile solid-state memory in such applications as numerical machinetool control, data loggers and recorders, portable terminals and intelligent test equipment, and military systems in harsh or dirty environments.

Bubble-based storage systems have no moving parts and thus are not subject to the mechanical failures of tape and disk storage.

The Bublset's temperature range of -20° to +70°C extends well below that of most competitive media, which are limited to 0°C, Stempski states. The lower range is needed on oil-well data-logging systems and on power-demand meters located outside buildings, as well as in many shipboard and airborne applications, such as flightmanagement recording systems.

amplifiers — it contains only the next year.

Designated Bublset, the new bubble memory and temperaturesystem consists of a read-write unit, sensing circuitry. "The design less than 3 by 4 by 6 in. in size, that avoids the data loss typically due to powering up or down or from rebubble cassettes ranging from moving a magnetic tape cassette during operation," says George Reyling Jr., manager for magnetic bubble memory systems.

The bubble memory controller detects and corrects errors automatically. It has built-in self-test features as well as an automatic write-protection feature.

The system comes with two selectable ports - an RS-232-C serial interface and a byte-wide parallel port for interfacing with microprocessor-based systems. Its +5 V and +12 V power supply reguirements and the low power consumption typical of bubble memory technology increase its suitability for portable applications, Stempski notes.

National will make the Bublset available in the general marketplace in the second half of this year. For industrial-grade versions, Bublset will be priced in the US\$1000 range in small quantities. The price includes the read/write system and a minimum-capacity (100K) bubble memory cassette. Prices of the cassettes will vary with The Bublset cassette has no capacity. Militarised and more function or coil drivers and no sense rugged versions will be available



The one-stop Microcomputer Shop for total service to TRS-80* users

*TRS-80 is a registered Trademark of Tandy Radio-Shack

NOW AVAILABLE CISA DISK PASCAL

Executes up to 60 times faster than DISK BASIC. HAS FULL DISK I/O FEATURES and many facilities not available on languages costing many hundreds of dollars.

ADVENTURE SERIES L2/16K

DO NOT CONFUSE WITH CHEAP CASSETTE-BASED 'TINY' PASCALS. overlays and developments will be available to registered users at a nominal charge. Includes the fastest and most powerful screen editor we have seen. Will edit PENCIL, SCRIPSIT and ASCII files.

PASCAL is much easier to manipulate than ASSEMBLY, and is practically as efficient as it compiles into a true-optimized machine-code.

More efficient than currently available BASIC COMPILERS selling for twice the price. We honestly believe that this Australian written PASCAL to be the fastest, most sophisticated and powerful high-level language available anywhere in the world for the TRS-80 Model I.

RELEASE 1.0 \$99.00

(numbered copies to registered single-users only) Early purchasers will be offered upgrades at no cost penalty.

\$39.95

CISA HARDWARE AND MODS

HEAVY DUTY POWER LINE FILTER Absolutely essential for enthusiast and busines CISA LIGHT PEN AND DEMO SOFTWARE Don't be fooled, this includes both. Compare prices CISA DATA DIGITIZER, Vers. 2 Now accepts most types of cassette player. Essential for use with HISPED. No internal modifications\$57.50 16K UPGRADE KITS Both keyboard and i/face. Fitting Charge... GREEN PHOSPHOR TUBES CISA RS232 PRINTER-DRIVER Operate any RS232 or 20MA serial printer with this Australian made unit. Includes software......\$54.75 VIDEO STABILISER CRYSTAL Totally removes shimmer and wobble on your video. Highly recommended for Green Tube. \$19.95

TRS-80 SOFTWARE

AIR TRAFFIC CONTROLLER L2/16K
Supervise a large area of air-space in real time
SPACE GAMES L2/16K
Five brilliant games in the classic space
series\$14.50
STRATEGY GAMES L2/16K
Four fascinating games to test your judgement and logic
\$14.50

1	ADVENTORE SERIES LZ/TOK
	Adventure-1, The Count, Voodoo Castle. Each\$14.95
ı	Z-CHESS
	A fast and exacting opponent. 6 levels of play. L2/16K\$19.95 Disk 32K\$24.95
ı	DISASSEMBLER IN BASIC L2/16K only
	Disassembles ROM and high memory machine language routines
	Checks and verifies every millemetre of a cassette tape. Also useful as cassette I/O diagnostic\$9.95
ı	FLOPPY DOCTOR 32K/DISK
	This is the most comprehensive and exacting series of memory and disk I/O tests we have seen.
	THE SIMUTEK SERIESeach \$14.95 1. Invasion Worg, Star Wars, Space Target, Saucers. Full of action and surprises!

- 2. Checkers, Poker Face, Tanglemania, The
- Psychic, Word Scramble. Games of skill and logic.
 3. Poetry, Electric Artist, Gallactic Battle, Wordmania,
- Air Command. A good value mix of game type.

 4. Life, Planetary Lander, Pharoah, Robot Hunter, Greed. A more exacting package of games and
- Super Horserace, Maze-Mouse, Amobic Killer, Logic, Submariner. 5 games to test your skill and 6. 20 Home Finance Programs. Every calculation you
- will ever need for your building society or hire purchase deposits or loans.
- Backgammon, Speed Reading, Yhatzee PT109.
 Your favourite historical games now on the TRS-

These seven packages are excellent value for any TRS-80 owner. ...\$14.95 ea. Plus many, many more.

BASIC EXTENSIONS

BASIC EXTENSIONS Single step through a BASIC programme. Enable-disable BREAK key, plus many other de-bugging side\$9.95

NEW CISA SOFTWARE

BASIC EXTENSIONS by G.J. Howe

MCMOM by M.J. Dinn of 80-Software.

MCMOM provides all the facilities needed to write, run, debug and save machine level programs. Single step through ROM, RAM indefinitely or until a pre-set break-point is reached. Displays all register contents at every step. Immediate switching to Z80 mnemonics display, if required. Many other features. Level II 16-48K

Disk version available soon.

Exclusive to CISA and authorised agents.

MICROPOLIS DRIVES FOR THE TRS-80*

For the enthusiast: 192K bytes per drive. SINGLE 77 TRACK

A professional disk drive for the business user: TWIN 77 TRACK 385K.....

Both complete with heavy-duty case and inbuilt power supply and free dospatch to TRSDOS. Requires cables - 2 drive \$30, 3 drive \$40, 4 drive \$50

MIX 'N MATCH with any 35 or 40 track drive. SHOP WHERE YOU CAN BE SURE OF SERVICE BACK-UP AND YOUR WARRANTIES HONOURED. We copy 35 or 40 track disks onto 77 track disks for \$1.00 each plus the cost of the diskette.

CISA REPAIR, UPGRADE AND MAINTENANCE FACILITIES

Yes, we are now in a position to undertake any repair of any nature (except plastic cases) to any Tandy Model I or Model II equipment or any of our own peripherals. No fancy surcharges if you have any previously fitted mods

CISA HIRES BOARD

This totally Australian designed and manufactured unit has many fea-This totally Australian designed and manufactured unit has many reatures which we truly claim are unique in the world. Every character is now programmable into a 6 x 12 grid, giving you the highest resolution of virtually any microcomputer. Includes full lower case driver to printer and video. Ends many hidden errors in BASIC lines. 90 days full guarantee parts and labour on your system if we install it. HIRES BOARD

Fitting. \$25.00 \$25.00 \$25.00 \$25.00 \$275.00 \$275.00 \$275.00 \$275.00 \$3.00 \$275.00 \$3.0 .\$25.00 .\$275.00

PHONE OR CALL AND BROWSE. TRADE ENQUIRIES INVITED


Trading Hours: 9am to 6pm Monday-Friday, 9am to 12.30pm Saturday

All the above fine products are available at or can be ordered from: NSW: SOUTH COAST COMPUTING SERVICES The Village Centre, 90 Worrigee Street, Nowra, 2540. (044) 25-552. CONQUEST ELECTRONICS 212 Katoomba Street, Katoomba, NSW: SOUTH COAST COMPUTING SERVICES The Village Centre, 90 Worrigee Street, Nowra, 2540. (044) 25-552. CONQUEST ELECTRONICS 212 Katoomba Street, Katoomba, 2780. (047) 82-2491. ACT: COMPUTER WORLD Shop G71, Woden Plaza, Canberra, 2601. (062) 81-1368. COMPUTER BUSINESS AIDS PO Box 99, Kambah, 2902. QLD: SOFTWARE 80 200 Moggill Road, Taringa, 4000. (07) 371-6996. UNIVERSAL SERVICES Cunningham Street, Dalby, 4405. (074) 23-228. ALLIANCE COMPUTER PRODUCTS 11 Cracknell Road, Chardons Corner, Anneriey, 4000. (07) 392-1152. OUTBACK ELECTRONICS 71 Barkley Highway, Mt. Isa, 4825. (077) 43-3475. TAS: H.S. ELECTRONICS PTY. LTD. 104 Charles Street, Launceston, 7502. WA: WAGB RADIO CENTRE 129 Fitzgerald Street, Perth, 6000. (09) 328-6254. VIC: W.D. LESLIE PTY. LTD. 363-375 Raymond Street, Sale, 3850. (051) 44-267. NT: RADIO PARTS (DARWIN) PTY. LTD. PO Box 515, Darwin, 5790. (089) 818-508.

CISA MICROCOMPUTING PTY. LTD. 159 KENT STREET, SYDNEY, NSW 2000. PHONE: (02) 241-1813.

Orders under \$100 add \$2.00 p and p. Over \$100 post free. For repairs and mods to systems — send by carrier — you pay, we pay return carriage.

Printout

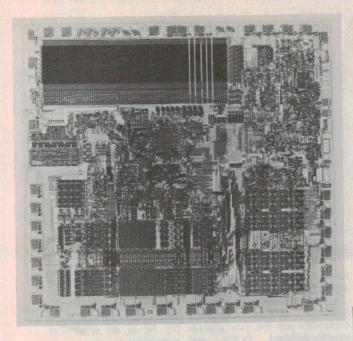

National Semiconductors unveils 16-bit micro

The first wafers of the NS16032 microprocessor were produced in December last year at National's Utah factory, and evaluation and debugging of the complex 16-bit micro are now being carried out.

According to National, the 16000 family offers virtual memory, high fully supported by a complete family level language support, symmetric of development systems, compilers, register set, memory-to-memory operating systems and board level operations, powerful addressing products. modes, numerous data types, symmetric instruction set, memory agreement with Fairchild Camera management and large, uniform and Instrument Corporation to addressing, plus unique modular second source the NS16000 family. cessing facility.

of system configurations, extending oriented devices with data on from a minimum low-cost system to Fairchild's dedicated peripheral a powerful 16M system. It will be circuits.

National also announced an software support and a slave pro- Under the agreement there will be an exchange of mask-making data The family supports a wide variety for the NS16032 CPU and systems-


VDU to take Australia by storm?

The TVI-950, manufactured by Televideo and released in Australia by Anderson Digital Equipment, is confidently expected by them to take the Australian market by storm, as it is said to have done in the USA.

with the shift key) that can be as a standard. programmed to the user's requirements using 256 bytes of on-board scrolling, and a 25th status line. for more information.

The detachable keyboard has 11 Fifteen special characters for special function keys (22 functions powerful line graphics are available

The TVI-950 will sell at \$1595 RAM. In addition keys, key functions plus tax for one-off, with quantity and even keyboard locations can be discounts available on request. changed, and other features include Contact Anderson Digital Equipadvanced editing with wraparound, ment Pty Ltd, P.O. Box 322, Mount split screen with line lock, smooth Waverley Vic. 3149, (03)543-2077,

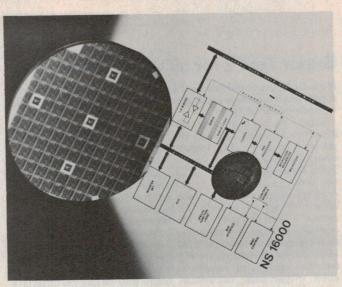

Here's lead in your pencil!

An 'electronic blackboard' that will allow users to write directly on special pressure-sensitive screens has been developed by Sanyo Electric Inc., a US division of the Japanese company.

sent to an internal microprocessor then drawing on the screen. which generates a video display. Thus you draw on the screen in the same manner as you would draw on transferred to a floppy disk for

The blackboard employs a light screen permits the user to select pen and a screen. When the light from 16 colours by touching the pen touches the screen, a signal is pen to the appropriate colour and

The completed drawing can be storage and future use. A printer can A display at the bottom of the be attached to provide hard copy.

Powerful desktop computer system

The DSD 880 Winchester/floppy disk storage system can be used to configure a compact and powerful desktop computer system in partnership with the DEC VT-103 intelligent terminal, according to its suppliers, Anderson Digital Equipment.

The DSD 880 is said to be fully compatible with DEC hardware, software and media, and can be used with any system based on the popular DEC LSI-11 processor.

Ideal for any application where space is at a premium, the DSD 880 combines an eight-inch Winchester and an eight-inch floppy in a compact 51/4" high package.

The Winchester provides 7.8M of formatted capacity; the floppy gives an additional 1M and accepts all combinations of single-sided/ double-sided and DEC single density/double density diskettes. In most applications the Winchester is the primary on-line storage due to its higher capacity and per- 3149. (03)543-2077.

formance, and low-noise operation. Users may obtain software and diagnostics directly from DEC on floppy disks.

DSD 880 users can move readily from one DEC operating system to another, and can expect to remain compatible with future releases of DEC software. Developers of systems incorporating the DSD 880 can use DEC diagnostics for debugging.

The DSD 880 costs \$7450 in single quantities, and further information may be obtained from Anderson Digital Equipment Pty Ltd, P.O. Box 322, Mt Waverley Vic.

Printout

Super Text 2 for all those little Apples

Muse Software of Baltimore, USA, have announced the release of a new word processor, called Super Text 2, which is compatible with all species of Apple.

Super Text 2 displays either with users to have the Form Letter set provided by the 'Dan Paymar Virtual Memory Assembler. Lower Case Adaptor', and accordprinting professional-quality copy a normal typewriter would; there is manual". Later sections of the obtain upper case displays and manual are said to teach the user to printouts. do tricks and variations on standard letters and files, and the system also the Super Text 2 for \$149, and if you has the capability of completing wish to trade in your old word prodirect mathematical calculations, cessor, they will give \$90 credit on a calculations on numbers in a file, Super Text and \$50 on an Apple column totals, etc, as well as normal Writer, Easy Writer, or Apple Pie. word processor functions. Slave More details of the Super Text 2 disks may also be copied, even if are available from Seahorse Comdamaged.


facilities to enable Super Text 2 available ex-stock.

the normal character set or with the Module, Terminal Module, and the

Unlike most other word proing to Muse will enable anyone "to cessors, the Super Text 2 uses the be writing, saving to disk and shift key to call upper case in the way within minutes of opening the no need to use the 'escape' key to

Seahorse Computers are offering

sectors of them have been puters, P.O. Box 47, Camden NSW 2570, (046)66-6406, from whom Super Text and the Dan Paymar Muse will be providing add-on Lower Case Adaptor are also

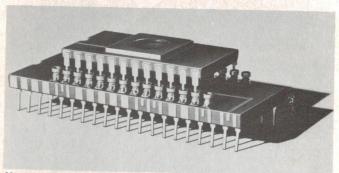

Mostek's new piggyback processor, the MK38P70.

RAMs, chips and cables

Amtron Tyree recently released three new products designed to expand their computing range.

• The Mostek 'Bytewide' RAM was Australian market conditions. The designed to compatible with the most popular 1K, 2K or 4K of EPROM, proindustry-standard ROMs and EPROMs, so that memory boards interrupts and single 5 V supply. may be configured to accept any mixture of RAM, EPROM and/or version of the well-known Ampenol ROM. By using PROM or EPROM devices to decode addresses and two wire jumpers per memory chip, a designer can now design a universal memory board upon which both page boundaries and memory insertions and withdrawals, and type (RAM, ROM or EPROM) may be simple and reliable termination to varied at will, according to Amtron Tyree. Mostek is also committed to are interchangeable and intermatecompatibility between today's able with the 57 series solder or memories and future generation

 The new Mostek MK38P70 can flat-to-round cable transitions. 'piggyback' any one of five popular EPROMs, producing a highly versa-

be completely MK38P70 family features include: grammable timer, external

 The 57F series is a flat cable 57 series micro ribbon connector. It is currently available in 36 and 50-way versions, with 14 and 24 to be coming soon. Features include positive spring, latches, 20 000 0.05" flat cable. These connectors micro-pierce insulations displacement connectors for intercabinet or

Further information on all these products can be obtained from tile single-chip microprocessor said Amtron Tyree Pty Ltd, 176 Botany to be very suitable for low-volume St, Waterloo NSW. (02)698-9666.

A rolling bubble gathers no MOS

Bubble memory shipments will increase 65% a year, from US\$18.4 million in 1980 to US\$100 million in 1983 and US\$226 million in 1985, according to Venture Development Corporation in the US.

First major applications have floppy disk systems. Fixed head disk dust and chemicals in the atmos- Kbit in 1984, says the Corporation. phere make moving magnetic media unsuitable, and in portable terminals where resistance to shock is important

Small computers and word pro-Rockwell's will be increasingly cessors important applications.

As prices of bubble memories decrease with larger volumes and setback to Rockwell. more experience in producing general memory applications.

New bubble units pose a threat to world-wide sales director fixed head disk drives but not to Rockwell.

been in areas such as numerical drives will be displaced by bubbles control of machine tools, where when the price drops to 15 cents/

> Meanwhile, Rockwell dropped out of the bubble memory market. It is believed that Motorola's decision not to second-source 256K-bit memory and instead produce its own 1M device was a serious

The price erosion in semiconducthem, the use of bubbles will shift tor memory devices, particularly in from specialised areas such as 64K RAMs, slowed the development adverse environments to more of the bubble memory market, according to Robert Anslow, EDD

New address for Sorcerers

The Sorcerer Users' Group in Victoria, which has been established for over two years and has a current membership of over 400, now has a new postal address. Contact them via The Secretary, Sorcerer Computer Users of Australia (SCUA), P.O. Box 144, Doncaster Vic. 3108.

Zilog cuts price of Z8000

With the introduction of the Z8002 and Z8001 MPUs in plastic packages instead of ceramic DIP, Zilog has cut prices drastically.

The Z8002 will now be priced at tions such as printer controllers. US\$19.90 in quantities of 1000; The Z8001, a segmented MPU formerly it was US\$45. The Z8001 MPU and the memory management unit (Z8010) is being offered as a kit in plastic packages at US\$49.50 pared with a former price of changed.

Zilog is aiming the Z8002, a non-64K bytes of memory, at applica- on them.

addressing eight bytes of memory, is aimed at medium- to high-end performance applications.

When contacted for comment on each at the 1000-piece level, com- Zilog's price reduction, the general manager for Intel's microprocessor (IS\$139. The ceramic prices for the operation said, "It is a belated move Z8001 and Z8002 have not on their part to make the processors competitive with the 8086 and 8088." He disclosed that Intel is also planning to offer these two MPUs in segmented MPU which addresses plastic, and is reviewing its pricing



S100 MICROMODULES: AFFORDABLE, COMPATIBLE, EXPANDABLE...



INSTRUCTOR 80:

Ideal starting package. Uses DGZ80 CPU, DG640 VDU, RCA Keyboard and comes complete with manuals and programming course. S100 based system needs no special interface to expand to any configuration. Don't be fooled with single board imitations, the Instructor 80 is fully software supported with basic, assembler, games and even Pascal and CP/M!

IN-Z80-K INSTRUCTOR 80 KIT \$399.00

DGZ80 Z80/S100 SINGLE **BOARD COMPUTER:**

Most popular Z80/S100 SBC in Australia, Features Z80 CPU, PIO, CTC for powerful I/O and timing, 2K ROM/2K RAM on board, 2 or 4 MHZ operation. With DGOS Monitor in ROM the DGZ80 needs only a keyboard and DG640 VDU for minimum system.



DG-Z80-2K 2MHZ DGZ80 KIT \$199.00 DG-OS-1.4-DGOS MONITOR IN ROM \$40.00

DG640 VISUAL DISPLAY UNIT: This super functional S100 PCB is an industry standard. Generates 64 characters per line, 16 lines per page, full upper/lower case and graphics. Built in crystal time base locks onto TV sync. Watch out for outdated "El Cheapo" 32 character/upper case only displays, they just don't suit most software requirements.



DG-640-K DG640 KIT \$149.50

TCT PCG HIGH RESOLUTION **GRAPHICS:**


Need high resolution graphics and programmable characters? The TCT PCG option connects to the DG640 to produce 512x256 bit resolution. Supplied with StarWars and table tennis programs on cassette and has built in joy stick interfaces



PCG KIT \$140.00

AT16K ECONOMY 16K STATIC MEMORY:

Just released, the AT16K uses proven 2114 static memory chips to produce a 16K block locatable ram module with write protect and bank select (port or switch controlled)



AT16K is supplied burned-in and tested ready for years of trouble free service!

AT-16K-4A ASSEMBLED/TESTED AT16K (450NS) \$199.00

TCT 16K BLOCK LOCATABLE RAM:

This versatile 16K ram module is configured in four independent 4K blocks each with write protect and independently locatable at any location in 64K address space. The board



is fully socketed and includes dip switches for easy location.

TCT-16K-K TCT16K IN KIT FORM \$209.00

2650/S100 SINGLE BOARD COMPUTER

Released at last this top class design now brings the 2650 to the S100 bus. Feature laden board contains 2650 CPU, 8255 PPI, serial and parallel ports, on-board ram (to 4K), on-board rom and bank select fac-



ility to address up to 512K. The 2650/SBC is available in kit form or as a PCB with manual and control ROM.

SBC-2650-K 2650-SBC KIT WITH MANUAL \$209.00 SBC-2650-SK 2650-SBC PCB/MANUAL/ROM \$80.00

SCVT S100 SERIAL VIDEO TERMINAL

Described in EA Oct 1980, the SCVT uses the Thomson-CSF VDU Controller to produce this versatile serial terminal. Features on board UART with BAUD rate generator (50 to 1200), cassette interface, RS232 and current loop working and accepts effective "Dumb" terminal suitable for applications.



ASCII encoded keyboard to output to monitor or modified TV set. Format is 64 characters/16 lines and attributes include reverse or flashing characters, cursor abbressing and hardware scrolling. With a keyboard such as the Clare C70, and a suitable TV set, the SCVT becomes a cost microprocessor many

SCV-T100-K SCVT TERMINAL KIT \$189.50

Full product descriptions and specifications are detailed in our 1981 catalog (see ETI March 1981). Note that prices quoted include sales tax. Please add \$4.00 to cover packaging and registered postage



MAIL ORDERS TO:

PO Box 355, Hornsby 2077

Please add \$2.00 per order towards cost of post and packing.

OFFICE/SHOWROOM

1a Pattison Avenue, Waitara 2077. Hours: 9-5 Monday to Saturday Telephone: 487 2711

1 Debenham Road, West Gosford (behind the Pizza Hut) 043.24 2711

5 bankcard



Are you going to let a Yank tell you how to run your Australian business?

Most computer ledger systems are designed for American businesses & tailored around American taxation. So why settle for a hand-me-down?

THE DICK SMITH GENERAL LEDGER

WAS DESIGNED FOR AUSTRALIAN BUSINESSES & suits SYSTEM 80 or TRS 80 computers with S-100 expansion

There are numerous General Ledger Systems available in Australia today. Most are based on programs written in the USA for American businesses. It took Bob Petersen — ex EDP manager for Woolworths months of hard work to find the best advantages of every system and to incorporate them in this fabulous program suitable for small Australian businesses.

To run the General Ledger, you require: System 80 computer, 32K, video monitor, expansion interface, disk drives, printer and cables.

2 program Disks and 1 Data Disk with Comprehensive User Manual

All this for only

Credit terms available to approved applicants


DICK SMITH **Electronics**



Cat. X-3752

Compare these features

- Well-defined chart of accounts. General Ledger comes complete with 200 accounts which will suit most businesses and yet flexible enough so that accounts may be deleted, altered or new accounts added.
- Up to 1,975 accounts with 5 account
- groups and unlimited account sub-groups
 Up to 315 entries per session and 2,730 entries per month.
- Check digit security computer generates a check digit so that typing errors for ledger entries are virtually impossible.
- Password security 3 password levels to enable different access to records. Accounts can now be kept as confidential as you like.
- Batch posting for well-defined audit trails Automatic 'Out of Balance' detection.
- Automatic Entry Totalling.
- Automatic document balancing Comprehensive manual complete with illustrations, working samples, reports and glossary — written for the person who knows nothing about computers or accounting.
- Reports generated trial balance, profit and loss statement balance sheet, chart of accounts, posting summaries, transaction reports, account details. Titles may be provided for reports.
- Fully interactive with Accounts Payable. (Coming soon).



SEE OUR OTHER ADS FOR FULL ADDRESS DETAILS



MENSA COMPUTERS

Suite 3, 454 St. Kilda Road, Melbourne, 3004. Telephone: (03) 26-5683, 26-6150.

FINDEX, The Real Computer



THE WORLD'S FIRST PORTABLE MICROCOMPUTER Battery or mains operated

RAM 48K to 2 megabytes, bubble memory to 2MB, gas plasma display, optional audio, printer, mass storage mini floppys to 800K bytes, hard disk to 195 megabytes, acoustic coupler, S-100 bus, battery optional, CPU with real time clock. For dynamic businessmen on the move. Ideal for real estate agents, insurance brokers and accountants.







Powerful, multi-purpose microcomputer systems.

BUSINESS SYSTEMS

Priced competitively from as low as \$45.00 p.w. lease cost including sales tax and software.

TYPICAL APPLICATIONS

Debtors ledger and statements, creditors ledger and remittances, general ledger and trial balance, order entry/invoicing, sales analysis, payroll/wages, enquiry, word processing, mailing, record keeping, ledger card, doctors office, real estate, agency accounting, hotel/motel accounting, branch office accounting.

Also:

Facilities management consulting. Software and computer sales. Computer data preparation.

NTRODUCING

MENSA G.F. 1000

BASIC SPECIFICATIONS

CPU 8080 and Z80 operating at 4MHZ. 64K bytes Dynamic RAM expandable to 2MB storage bytes of unformatted data on two double density drives. Optional external hard disk storage can be connected using the optional S-100 Bus. Floppy Disk. All modules mounted to base. CRT in a rigid aluminium frame. Disk Drive assemblies are mounted into special brackets for ease of servicing.

WINCHESTER DISK


26MB of Winchester Disk complete with controller and easy backup. Disk has special capacity to only back up files accessed during the last period. Disk operating system CP/M.

OPTIONAL SOFTWARE

FORTRAN, COBOL, BASIC.

Application packages. Extensive software development tools are available from leading software vendors, including software for the following applications: payroll, accounts receivable, accounts payable, inventory control, general ledger and word processing.

Mensa computers provide a service network throughout Australia at major service centre locations to minimise response time to service calls. To ensure that equipment will operate at peak performance, engineers and technicians are trained to ensure the highest possible standard of service.




Want to get into microcomputing without boiling your brain cells or breaking the bank?

Part 1

We often receive letters from readers that say "... I want to get into microcomputing but can't afford hundreds of dollars and don't have an engineering degree". When approached with this project, we knew that here was an answer. This project is not a 'toy' or anything like an 'evaluation kit', yet is inexpensive and simple to build and get going. It was designed by Hugh Anderson and developed for publication by Graeme Teesdale, both of whom hail from the land of the kiwi and the great white cloud.

MICROPROCESSORS peared, the concept of having a personal computer to do one's bidding has firmly taken hold in many people's minds. Electronics enthusiasts generally have a different motivation in that they're interested in the technology as well as what it will do. But the price of getting involved is generally pretty high and the level of knowledge required up front is generally pretty high too. Whilst you can buy an up-and-running computer for around \$300 (the Sinclair ZX80), involvement with the hardware is minimal and many enthusiasts seek to build a computer from a kit. We've described computer projects in the past and it's possible to make up a functioning system from our ETI-680 CPU board with the addition of some peripheral hardware; the cost is around \$400 but this presents a barrier to many otherwise interested enthusiasts. There are other kits around, but the price is much the same or can extend to two or three times that.


The 'evaluation kits' marketed by various microprocessor manufacturers are a less expensive alternative, but are intended for engineers and technicians and a certain level of knowledge and experience is assumed in their presentation. They also have a number of other limitations that cause many enthusi-

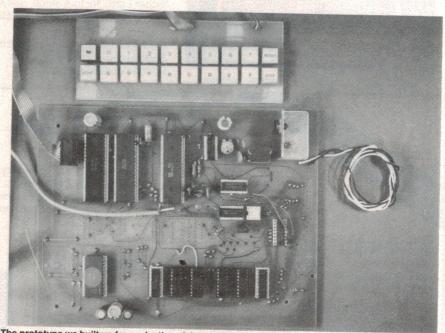

The prototype we built up for evaluation, debugging and further development. At top is the re-arranged hex keyboard designed to make data and program entry easy — it's also great when playing games! The final unit has a somewhat larger pc board which includes an RF modulator. asts to shy away from them.

This project is aimed at people wishing to make a start in the microprocessor field, but who have no real idea where to begin. That 'dream' computer is here. The basic unit is

provision for expansion units - such as additional memory, standard keyboard, etc — has been included. The basic unit provides for data and program entry from a hex keypad and either a standard type or one we've especially designed for constructed on a single pc board, but user convenience may be used. Video

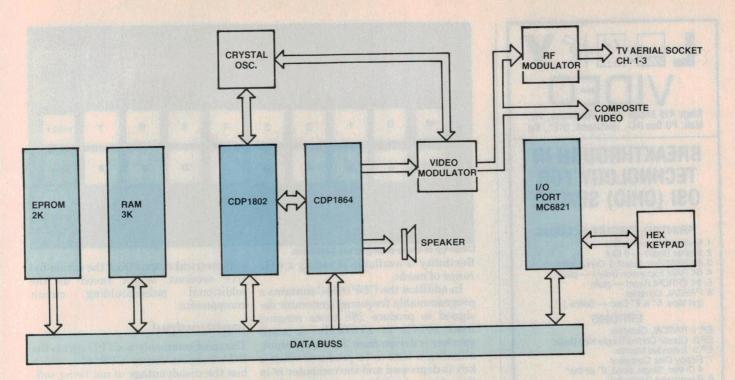

can be taken direct to a monitor, or RF output from an on-board modulator can be plugged directly into the antenna of a TV set tuned to channel 1. A cassette interface is provided on board and any standard cassette recorder and tape may be employed to permanently save programs. Colour video can be obtained with the addition of further components to the basic board. An audio output, via a small speaker, is provided and is used to give an audible 'prompt' when operating the keypad. In addition, it is possible to play tunes and provide games sound effects.

Following is a general technical explanation and description of the project.

The microprocessor

The Computer is a versatile single-board mini-computer using an LSI COS/MOS CDP1802 microprocessor. This is one of two produced by RCA and is an eight-bit register-oriented central processing unit. Its main advantages are low power consumption and a wide operating voltage range of 4-10 volts.

However, one of the side effects of the low power consumption is its slow-speed machine cycle; the oscillator input frequency is 1.773 MHz to the CDP1802, machine cycle duration being approximately $4.5~\mu\mathrm{S}$. However, this apparently slow speed is counteracted by efficient software design.

The CDP1802 has a total of 91 easy-to-use machine code instructions, and to speed up writing programs a resident CHIP-8 language interpreter is located in EPROM.

A saving on hardware is achieved by

locating the monitor and CHIP-8 interpreter in memory location 0000 to 0400. To start the monitor program running the on-board RESET button is depressed; when it is released the processor resets some of the internal registers and looks to address 0000 for the next instruction. There is thus a saving in the hardware necessary to bootstrap the processor to some other area of the memory map, e.g. 8000 to 81FF, as in some other systems. The following is a memory map for this computer:

OFFF additional user RAM 0C00 OBFF additional user RAM 0800 program storage area in 0700 0600 RAM video display memory -0500 variables and scratchpad 0400 0300 monitor and CHIP-8 inter-0200 preter located in EPROM 0100 0000

The user RAM is standard 2114 RAM, the final design being expanded to 3K RAM and 2K of EPROM on board. The

This project was originally developed by Hugh Anderson for Kitparts N.Z. and known as the 'HUG 1802'. Graeme Teesdale, working in ETI's laboratory, has further refined it in conjunction with advice from Hugh, and prepared it for presentation as an ETI project, number ETI-660.

use of the more expensive CMOS 2114 RAM will result in a lower total power consumption, and using a total of 3K standard RAM and other COS/MOS devices the total load current for the complete project is around 400 mA. This low power consumption allows the use of a simple power supply driven by an ac plug pack — no lethal 240 V mains to connect up!

Using the cheaper 2K 2716 EPROM only a single 5 V supply is required. Only 1K of the 2716 is used at this stage, but a 'tiny BASIC' is at present under evaluation.

Features

RCA produce a wide range of busscompatible devices for use with the CDP1802. For this project we have selected the CDP1864C, an LSI CMOS colour or black and white PALvideo controller. compatible CDP1864C generates vertical sync, horizontal sync and composite sync. These signals combined with the RED, BLUE, GREEN, BURST and BACK-GROUND output signals can be used to generate a composite video signal for a video monitor or into our RF modulator to your TV aerial inputs. The DMA (Direct Memory Address) feature of the 1802 is used for direct data transfer of luminance information for display refresh.

The completed toy computer with additional components added to the motherboard and under program control will produce limited background and foreground colours, but sufficient



Shop: 418 Bridge Road, Richmond, Vic. Mail: PO Box 347, Richmond, 3121, Vic.

BREAKTHROUGH IN TECHNOLOGY FOR OSI (OHIO) SII/C1P

PRINTED CIRCUIT BOARDS

- 1. Mother Board 8 Slot 2. Mother Board 5 Slot
- 3. 8K RAM Exp. Board & Connector
- 4. 8K RAM Expansion Board plain
- 5. 8K EPROM Board plain
- 6. PASCAL Compiler
 - (on tape, 5" & 8" Disc Soft/w.)

EPROMS


- EP.1. PASCAL Compiler
- EP.2. Cursor Control/Single Key Basic
- EP.3. Extended Monitor
- 7. Floppy Disc Controller
- 4 Drives, Single sided, 8" or 51/4"
- 8. Programme Generator
- 9. Dual V.I.A.

Drilled Boards extra. Assembled & Tested \$15 extra.

Component Packs available from \$6-\$50.

See previous adverts for over 100 items of software or buy our catalogue \$3.50 plus \$1.00 P&P

This ad was printed entirely on the NDK S-4000 wordprocessing printer





will drive any precision printer such as Diablo, Qume, Spinterm, etc. And Spellbinder will almost any CP/M-based

operate on almost any CP/M-based microprocessor - Sorcerer, TRS80, System80, Apple (with Z80 card), Vector Graphic, Superbrain, etc. Full mailing-list facilities, mail-merge, boilerplate, forms-handler, alpha and numeric sorting, multi-column printing, line-numbering, etc.

And the system that printed this ad does our accounts and keeps our books, types our accounts and keeps our books, types our letters (as well as our letterheads), keeps mailing-lists, does stock control and even corrects our spelling mistakes! It coats around \$8500 all up. And that's the top of the range! Contact us for a full demonstration.



AUSTRALASIAN DISTRIBUTORS

ENQUIRIES WELCOME

po box 364 edgecliff 2027 australia phone (02) 33 4536



flexibility is available to satisfy a wide range of needs.

In addition the CDP1864C contains a programmable frequency generator designed to produce 256 tones ranging from 107 Hz to 13 672 Hz. A small speaker is driven from the AUD output, allowing a tone to be produced when a key is depressed and the computer is in the tape load/dump routine. generator can be used with suitable software in users' programs.

To produce the correct line and vertical sync pulse periods, a crystal frequency input of 1.75 MHz is required to the CDP1802; conversely, to produce the correct colour phase angles, a reference of twice colour-burst frequency is required by the colour modulator circuitry. Considerable attention was given to this area in an effort to reduce the crystal count to one. The frequency of the colour burst is far more important than the line or vertical frequencies, and most video or TV receivers have at least a 5% catching range about their nominal frequencies. A decision was therefore made to use the more commonly available 8.86 MHz crystal, which was divided by five to produce a frequency of 1.773 MHz. The error when compared to the original 1.75 MHz is slightly over 1%, and results in a vertical sync frequency of 50.6 Hz and a line frequency 15 820 Hz. The only effect on screen is the 0.6 Hz beat pattern on the picture if an older monochrome receiver with a poorly filtered power supply is used. In modern colour TV receivers the effect is not noticed due to the improved power supply designs. The cost saving of not having the additional crystal and TTL oscillator outweighs any disadvantages encountered.

In practice it is difficult to obtain a symmetrical output divide-by-five to drive the clock input of the CDP1802. We experimented with different circuits until we discovered that the CDP1802 would accept an inverted nonsymmetrical output from the divide-byfive sections, which saved us the additional pulse-doubling components.

Input/output

The most commonly used I/O port is the RCA support device CDP1852, which has the disadvantage of not being software programmable to be input or output; the CDP1851 does not have this disadvantage but is more expensive. The more commonly available Motorola MC6821 Peripheral Interface Adaptor (PIA) was therefore chosen for the I/O port. The basic system uses only one of the two eight-bit bi-directional ports, the other being user-available, although only using machine language programming.

The PAO-PA7 section of the PIA is used to interface the hex keypad to the CPU, the other PB section not being initialised in the monitor program. The 6821 PIA is normally memory-mapped in the 6800 system, a combination of the decoded address lines and the 1802 encoded 'N' lines being used to select it for software programming.

The PIA allows a high degree of flexibility, but does require some initialisation software in the monitor for it to act as a keypad reader. Our design is arranged so that no load key is required in conjunction with the keypad to debounce keys. An audible tone is an indication of a key being depressed.

Whetted your appetite?

Construction details of this brilliant little computer will commence next issue, so clean up your soldering irons and clear a space on the workbench, kitchen table, etc. Following the construction we intend to present an article or two on programming along with a few already-developed programs that you can play with. Now you can learn about the ins and outs of microprocessing without boiling your brain cells or breaking the bank. Don't go away!

nitroducino

THE HUG 1802 CROPROCESSOR

Developed by our parent company in New Zealand to allow the hobbiest to get into microprocessors at minimal cost.

This simple single board microcomputer has already become the top selling micro kit in New Zealand — thoroughly tested and proven over the last 8 months.

And for those wishing to expand, there are many add-ons already under development.

CLUB

We have established a club for 1802 users to swap software and interesting applications. Club members are eligible for discount on software and peripherals purchased through us.

Club members will be given first (and possibly the only) opportunity to purchase anticipated new innovations as we develop them.

Membership is free ONLY to those who purchase the original HUG 1802 kit from Kit Parts (Aust.) Pty. Ltd.

Write now for FREE details to:

KIT PARTS (AUSTRALIA) PTY. LTD.,

PRIVATE BAG, NOOSA HEADS, QLD. 4567.

New Zealand customers please write to:

Kit Parts Ltd., PO Box 6544, 216 Cuba Street, Wellington.

NEW SOFTWAREFBN "SMART KEY"

AN INTELLIGENT KEYBOARD
PROGRAM FOR ALL CP/M COMPUTERS
— ONLY FROM AED!

- User can redefine the logical layout at the keyboard e.g. define as single keys common control characters.
- Otherwise unavailable characters can be programmed onto unused keys.
- Keys can be defined to generate the strings of characters e.g. for use in a Basic program a key can generate "for I =", another "next I".
- Definitions can be saved on disk and called up and used or altered on demand.

There is nothing like "SMART KEY"

\$50 on 8" disk with full manual (\$55 for Micropolis II 51/4"disk with manual)

NEW HOBBY COMPUTER

Announcing the AED "Stanten System"

A new concept in hobby computers. A computer to a high standard at a reasonable price. Using S100 card with guaranteed trade in values when the time comes to upgrade.

Standard Specifications

● 4 MHz Z80 CPU ● 64 x 16 video display with chunky graphics ● 8-slot actively terminated Mothercard ● Attractive and strong case with 10 amp power supply ● Programmable I/0 set up for Centronics style printers ● Dual cassette interface ● 16K of static RAM with room for another 16K on the same board ● Basic on tape ● Powerful MONAED monitor in EPROM ● B&W TV style video monitor.

Obvious Upgrades

Guaranteed trade-in of 80 percent of original purchase price when customer decides to upgrade to 20A power supply, 12-slot bus, 80 x 24 video, or green Phosphor video monitor.

Available in kit form or assembled and tested. Prices range from \$1731 for tax free kit to \$2173 for tax paid assembled.

This computer may be easily expanded to disk operation (from \$1285 plus extra 16K of RAM) and onto the ultimate in IEEE S100 computing.

- PRINTERS
- MONITORS
- S100 CARDS



- HARD DISK
- FLOPPY DISK
- CASSETTE

MICROCOMPUTER PRODUCTS

1981 CATALOGUE

The AED 1981 Catalogue is too large to insert in a copy of ETI (unfortunately). So send an 80c A4 SAE for:

● 16 pages of S100 cards ● 4 pages of cases and power suplies ● 10 pages of keyboards, video monitors, printers and disk systems ● 13 pages of complete computers — Sorcerer, AED "Stanten" and AED "Eclipse" business and engineering computers ● 14 pages of CP/M compatible software ● 3 pages of books and magazines ● 10 pages of parts ● 4 pages of furniture ● plus data on S100, RS232, IEEE 488 and Centronics Standards ● You need the 1981 AED Catalogue.

There isn't room to tell it all, so see us at:

130 Military Road, Guildford, NSW 2161 Phone (02) 632-6301 Telex AA70664

Trading Hours 9am — 6pm Monday to Saturday

Acoustic Electronic Developments P/L reserve the rights to vary prices and specifications without notice.

MICRO-80 is a monthly magazine dedicated to users of SYSTEM 80 and TRS-80 microcomputers. Owned and produced entirely in Australia, each issue of MICRO-80 contains at least six programs, articles, useful hints and answers to readers' problems; all designed to help tralia, each issue of MICRO-80 contains at least six programs, articles, useful hints and answers to readers' problems; all designed to help tralia, each issue of MICRO-80. Since MICRO-80's first issue in December 1979, we have published over 80 major your get the most out of your SYSTEM 80 or TRS-80. Since MICRO-80's first issue in December 1979, we have published over 80 major your software and 10 hardware projects. Most of the programs and articles are written by our readers to whom we pay publication fees pieces of software and 10 hardware projects. MICRO-80 readers can save money by buying Tandy products at 10% discount from an authorised dealer — for details see any issue of MICRO-80. Our sister business, MICRO-80 PRODUCTS, sells Australian designed and produced software and high quality, imported goods at low, sensible prices. We repeat, if you own a SYSTEM 80 or TRS-80,

CAN YOU AFFORD NOT TO SUBSCRIBE TO MICRO-80? 12 month subscription delivered to your door, only \$25.00

CASSETTE EDITION only \$60.00 for 12 months

If you do not have enough time at the keyboard to type in the program listings which are published in MICRO-80 each month, then you need a cassette subscription. As well as MICRO-80 magazine, you receive a cassette each month containing all the programs listed in the

SPECIAL OFFER TO ALL NEW SUBSCRIBERS TO MICRO-80

A FREE cassette containing 6 programs (3 Level I + 3 Level II), together with complete documentation, will be sent to every new subscriber to MICRO-80.

Suspicious of mail order? Then send \$2.50 for a single copy of MICRO-80 and see for yourself that this is the magazine for you!

Daisy Wheel Typewriter/Printer

MICRO-80 has converted the new OLIVETTI ET-121 DAISY WHEEL typewriter to work with the TRS-80 and SYSTEM 80 or any other microcomputer with a Centronics parallel port (RS 232 serial interface available shortly). The ET-121 typewriter is renowned for its high quality, fast speed (17 c.p.s.), quietness and reliability. MICRO-80 is renowned for its knowledge of the TRS-80/SYSTEM 80 and its sensible pricing policy. Together, we have produced a dual-purpose machine: an attractive, modern, correcting typewriter which doubles as a correspondence quality Daisy-wheel printer when used with your micro-computer. micro-computer.

How good is it? - This part of our advertisement was typeset using an ET-121 driven by a TRS-80. Write and ask for full details.



MPI DISK DRIVES

MPI is the second biggest manufacturer of mini floppy disk drives in the world. They produce a family of high quality 5¼" drives super-fast track-to-track access times with

(5ms!) 40 TRACK SINGLE HEAD ... \$339 40 TRACK DUAL HEAD ... \$449 80 TRACK SINGLE HEAD ... \$499 80 TRACK DUAL HEAD ... \$599 80 TRACK DUAL HEAD \$599

Dual head drives use both sides of the disk and occupy two drive positions — it is like two drives for little more than the

price of one! Prices quoted are for bare drives. Add \$10 per drive for a cabinet and \$30 per drive for a power supply.

DISKETTES FOR TRS-80

NASHUA 40 track single side\$4.50 ea VERBATIM 40 track double side . .\$5.90 ea VERBATIM 77 track single side . .\$5.90 ea

THE FABULOUS **NEWDOS 80** IN STOCK NOW!

ND-80 The disk operating system that gives:

New basic commands that support variable record lengths up to 4095

- bytes long.
- Mix or match disk drives supports any number of tracks from 18 to 80. Use 35, 40 or 77 track 5" mini disk drives or 8" disk drives, or any combination.

 A security boot-up for basic or machine
- code programs. User never sees "Do ready" or "Ready" and cannot "break clear screen or issue any direct basic statement including "List"... ... and much, much more

77 TRACK DISK DRIVES DOUBLE YOUR CAPACITY

Micropolis Floppy Disk, 77 Track, 100% larger capacity than most mini-floppy drives, complete with cable, power supply, chassis, and includes NEWDOS '80.

SYSPAND 80 FOR THE SYSTEM 80 \$119.00

\$179.UU

SYSPAND 80 is a self-contained module which connects to the expansion port on your SYSTEM 80 and gives you a CENTRONICS parallel port to drive a printer PLUS the TRS-80 40 line bus. SYSPAND 80 allows you to connect all Tandy peripheral, including the expansion interface, disk drives, MICROTEK MT-32 memory expansion unit and the fabulous EXATRON STRINGY FLOPPY.

TRS-80 MEMORY EXPANSION UNIT MT-32 ... \$149.00

The MT-32 is manufactured by MICROTEK The MT-32 is manufactured by MICROTEK Inc., USA. It provides a CENTRONICS printer port and sockets for up to 32K of dynamic RAM. It comes complete, ready to plug into the expansion port of your Level II 16K machine. (Will also work with your SYSTEM 80 via SYSPAND 80).

MT-32A without RAM...... MT-32B with 16K RAM.....\$204.00 MT-32C with 32K RAM .

16K MEMORY EXPANSION KIT

ONLY\$ 30 incl. p&p

These are prime, branded, 200 ns (yes, 200 ns!) chips. You will pay much more elsewhere for slow, 350 ns chps. Ours are guaranteed for 12 months. A pair of DIP shunts is also required to upgrade the CPU memory — these cost an additional \$4.00. All kits come complete with full, step-by-step instructions, no soldering is required. You don't have to be an electronic type to instal them. type to instal them.

DISK DRIVE HEAD **CLEANING DISKETTES**

\$29.00 plus \$1.20 p &p

S29.00 plus \$1.20 p &p
Disk drives are expensive and so are diskettes.
As with any magnetic recording device, a
disk drive works better and lasts longer if
the head is cleaned regularly. In the past,
the problem has been, how do you clean the
head without pulling the mechanism apart
and running the risk of damaging delicate
parts. 3M's have come to our rescue with
SCOTCH BRAND, non-abrasive, head
cleaning diskettes which thoroughly clean
the head in seconds. The cleaning action is
less abrasive than an ordinary diskette and
no residue is left behind.

ONLY \$1995 INC. S.T.

To: MICRO-80 P.O. Box 213, Goodwood, S.A. 5034 Please rush me the items checked below: 12 month subscription to MICRO-80 and my free ... \$24.00 I software cassette 12 month subscription to MICRO-80 and the cassette edition, plus my free software cassette . \$60.00 | The lastest issue of MICRO-80 \$2.50

PLUS THE ITEMS LISTED BELOW DESCRIPTION TOTAL ENCLOSED

..... Post Code ... bankcard No

Please debit my Bankcard \$ Expiry date

Name

MICRO 80 **PRODUCTS**

(08) 272 0966 433 MORPHETT STREET, ADELAIDE S.A. 5000

AUSTRALIAN SOFTWARE

We have a wide range of Australian software available. Send for a free catalogue

RS

a

n

d

SYSTEM

W

NERS

Ř S 80

a

n

d

THE AFFORDABLE HOME COMPUTER



when the System 80 was first introduced to Australia, the response was overwhelming! The Computer World was ASTONISHED at the QUALITY, as well as the PRICE. In fact, the System 80 has more features than the TRS-80, but with a price tag that is substantially less!

Microsoft's Level II BASIC and 16K Memory.

Another reason for all the commotion is that the System 80 uses the same, easy to learn, LEVEL II BASIC language that the TRS-80 uses! What does this mean? It means that the System 80 can run most of the 1000's of programs that have been written for the TRS-80 Level II, 16K computer! This means that you have scores of games, educational programs, business programs, simulations etc, that can be used with the System 80.

The System 80 is Expandable!

Your System 80 is ready to grow with your needs. The S-100 Expansion Interface enables lots of other "goodies" to be interfaced to the System 80. For example, you can control up to 4 disk drives, there is a full Centronics-type parallel printer port, RS-232C serial communications port plus two vacant S-100 card sockets. All of this for \$499 (X-4010) plus if you want further RAM memory you can get a 16K card for only \$199 (X-4016) which has provision for a further 16K to be added for only \$59.95 (X-1186).

IS NOW ON SALE

Comparison Chart Parameter Syst. 80 TRS-80

THE RESERVE THE PERSON NAMED IN COLUMN 2 IS NOT THE PERSON NAMED I		
CPU Type	Z-80	Z-80
Speed	1.7MHz	1.7MHz
S-100 Compatible (with expansion unit).	Yes	No
RAM (basic computer)	16K	16K
Built-in Cassette Recorder	Yes	
Built-in Video RF Modulator	Yes	No
Capacity of BASIC ROM	AND DESCRIPTION OF THE PARTY OF	No
Cassatta Bassada B	12K	12K
Cassette Recorder Ports (basic machine).	2	1
Motor Control for Cassette Recorders.	Yes(2)	Yes(1)

Cost of basic unit with 16K RAM, video monitor \$899.50* \$1169 & cassette recorder *

* The Basic System 80 costs only \$750. As this computer can connect direct to your TV set a video monitor, as a separate entity, is not required: making the saving on TRS-80 prices even greater

WHY SPEND MORE AND GET LESS! SYSTEM 80 - THE AFFORDABLE COMPUTER. . . .

Also available for the System 80: Disk Drives (X-3230 for \$379); Printers from \$495 (X-3252) to \$1995 (X-3265); Light pen (X-3645 at \$9.95); Add sound to your computer with "Sound Off", X-3648 at \$14.50 plus a host of cassette based software from system utilities to games — a full support of peripherals for your System 80.

Save Money! Use your own Television!

The System 80 has a built in RF modulator so you can use your black and white or color TV for a VIDEO MONITOR! A simple hook-up to your television's antenna socket.

Here's what you get:

The System 80 microcomputer with 16,000 characters of "In Computer Memory", Microsoft's Level II BASIC (built into the computer), a cassette player for storing or retrieving programs or data (cassette player is built into the computer!), an RF modulator for connecting the System 80 to your TV set (can also be connected directly to a video monitor, see our X-1196 @ \$149.50), complete instruction manual, learning manual and owners manual so you can begin to write programs straight away, plus a demonstration cassette with 5 programs (Cost Analysis, Graphics, Statistics, Biorhythm, and Star War).

ORDER TODAY!
4K RAM Cat. X-4003
\$695
16K RAM Cat. X-4005
\$750

DICK SMITH ELECTRONICS





See our other advertisements in this publication for address details, phone numbers, post and packing etc.

Universal logic: more potential in the chip

C.L. Boltz

Will we see the thousands of logic chips shrink to one small 'universal' set? If Dr Stanley Hurst of the University of Bath can translate his theories into practice a revolution in logic circuit design may well be sparked off.

MOST SILICON CHIPS are cheap because they embody conventional circuits of the sort generally needed in electronic equipment and are mass-produced. Many others are needed for special applications, but making small batches of chips designed to do specific, less commonplace jobs is complicated and expensive. A new approach to this problem, based on what is called universal logic, is a design for a chip with the potential of virtually any kind of computer-logic circuit and which can be used as a 'universal' building block in electronic systems.

A new and highly original line of development in microelectronics is being pioneered by Dr Stanley Hurst, a senior lecturer in the school of electrical engineering at the University of Bath, in the west of England. Dr Hurst's early work in universal logic, as it is called, was supported by the UK Science Research Council; now the Wolfson Foundation has made a grant of STG£127 000 (A\$254 000) to turn the theory into practical devices.

Closely associated with this research, but with its own money, is Silicon Microsystems, a small microelectronics company based 30 or so kilometres away in Malmesbury. The company's part is the practical and commercial aspects of design. Dr Hurst says that one aim of the partnership is eventually to become a national centre for designing microelectronics devices of the sort that will not be sold in the usual vast numbers.

Microprocessors (computer control processors on tiny slivers of silicon) are cheap and plentiful, but they are so only because of immense sales. The range available from the world's manufacturers is relatively inflexible, which means that users have to surround the microprocessor with other integrated-circuit devices to get the operation they require. So there is already a market, one which will increase in the 1980s and

onwards, where makers of equipment need specific digital microelectronics devices designed to their individual needs. The difficulty here is that the cost of designing a silicon-chip device is enormous, involving many highly skilled scientists and engineers over a very long time, even with computeraided design, and needing very complex and expensive equipment. This huge cost is quickly recovered when there are large, world-wide sales, but such a project cannot be considered by an equipment manufacturer who needs but one or at most a few types of special digital devices designed for his particular application.

Dr Hurst and Silicon Microsystems are not the only ones to see this. The British firm of Ferranti has already won a Queen's Award for technology for what it calls its uncommitted logic array, based on blocks of conventional circuits already incorporated in each chip but not connected to each other until the customer's needs are known.

Dr Hurst's approach is quite different. Though, as he says, there has been and will continue to be tremendous development in designs and manufacturing techniques, there has not been much "evolution or revolution at the fundamental level". If there were a general-purpose basic design, needing only the final masking procedure for arranging the interconnecting links to

make a device to suit a specific purpose, the small-quantity market could be satisfied economically. So he has researched what he calls his Universal Logic.

In this context, logic is the application of Boolean algebra to a digital process using binary arithmetic. Boole was an English logician and mathematician who wrote a paper on the mathematical analysis of deductive reasoning in 1847, a paper re-discovered in 1938 and applied first to relays and switches. It was seized on in the mid-1940s for electronic computing. It is a sequence of decisions of 'go' or 'not-go', or 'on' or 'off' or, in the language of Boole, 'true' or 'false'. A computer and any similar digital device is an immense multiplicity of electronic switches, known as 'gates', which pass on binary information (that is, a 0 for 'off' and a 1 for 'on') from one or more input signals.

Orthodox gates

Among the orthodox gates used in all digital computers and circuits employing logic there are four that are by far the most common. The simplest is probably the AND gate. In this, if there are two inputs, A and B, when both are 'on' or represent 1 in binary arithmetic the output is also 1. If either A or B is not on (that is, represents a 0) the output is a 0. Another is the OR gate. In this, if there are two inputs, A and B, the output

Inp	uts					Allp	ossib	le out	put fu	inctio	nsf(x	(i, X_j)					
Xi	Xi	fo	f ₁	f ₂	f ₃	f ₄	f ₅	f ₆	f ₇	f ₈	f ₉	f ₁₀	f11	f ₁₂	f ₁₃	f ₁₄	f ₁₅
0	0											1					
	1											0					
1		BONGPOOLS, T										1					
1	1											0					

Table 1. Functions which can be obtained from various gates with two inputs. For three input variables there are 256 possible output functions.

ATTRACTIVE CASE INCLUDES & KEYPAD

Who but DICK SMITH could offer this value?

COMPATIBLE WITH ZX80 SOFTWARE

Connect to your tv* & you're ready to go!

The MicroAce is not just another personal computer. Apart from the exceptional low price it offers two uniquely advanced components; the powerful BASIC interpreter plus the simple teachyourself BASIC manual.

Comes complete with everything you need to build your personal computer at home — PCB with IC sockets for all IC's, case, leads for direct connection to cassette recorder and television etc.

FEATURES:

- BASIC language
- Exceptionally powerful edit facilities, allows modification of existing program
- Randomise function, useful for games and secret codes etc.
- High-resolution graphics with 22 standard graphic symbols
- All characters printable in reverse under program control
- Lines of unlimited length

Complete kit including **UHF** Modulator

(connects to your UHF TV)

Cat. K-6500 P&P \$5.50

*If you want to operate with a VHF TV we have a VHF modulator for \$4.96 ... Cat. K-6040 Power supply to suit Cat. M-9560 ... \$12.95

Why pay

\$\$\$ or more?

DICK SMITH ELECTRONICS

NSW: 145 Parramatta Rd AUBURN 648 0558; 613 Princes Hwy BLAKEHURST 546 7744; 818 George St BROADWAY
211 3777; 531 Pittwater Rd BROOKVALE 93 0441; 147 Hume Hwy CHULLORA 642 8922; 162 Pacific Hwy GORE HILL
439 5311; 30 Grose St PARRAMATTA 683 1133; 125 York St SYDNEY 290 3377; 263 Keira St WOLLONGONG 28
8300; 171-173 Maitland Rd, Tighes Hill NEWCASTLE OPENING SOON; ACT: 96 Gladstone St FYSHWICK 80 4944;
QLD: 166 Logan Rd BURANDA 391 6233; 842 Gympie Rd CHERMSIDE 59 6255; SA: 60 Wright St ADELAIDE 212
1962; VIC: 399 Lonsdale St MELBOURNE 67 9834; 656 Bridge Rd RICHMOND 428 1614; Chr Dandenong & Springvale
Rds SPRINGVALE 547 0522; WA: 414 William St PERTH 328 6944; Chr Wharf St & Albany Hwy CANNINGTON 451 8666
Mail Order Centra: PO Roy 321 North Rude, NSW 2113, Ph. (02) 888 3200

Mail Order Centre: PO Box 321, North Ryde, NSW 2113, Ph. (02) 888 3200



The name for value. in computers and is 1 if either A or B is 1, or if both are 1. There is also an inverter or negator gate which inverts a single input, so that a 0 becomes a 1 and a 1 becomes a 0. Combining an inverter with an AND gate makes a NAND gate; an inverter with an OR makes a NOR gate. Generally speaking, for reasons of electronics, NAND and NOR gates make up the bulk of the logic of a digital system.

Lacking power

From the evidence of digital computing it must be agreed that these gates have been very successful, but analytically they do not satisfy Dr Hurst. In his words, they lack logical power. It is easy to see that there is an ambiguity in each gate. With an AND gate, for example, accepting inputs A and B, we can say that when one input is in the off state and the other in the on state the output is 0, but it does not indicate which one of A and B is off or on. With three inputs things are even more ambiguous. To put it another way, the output of an NOR gate is unique only when all inputs are 0, and of a NAND gate only when all inputs are 1.

The practical outcome of this lack of logical power is that quite a number of gates have to be combined to give a specified result. For example, in one simple device adding numbers there are 16 gates. A straightforward decoder (which translates from binary to ordinary decimal numbers, among other tasks) needs 50 gates to do its basic job. A circuit to compare one number with another has 33 gates. (These figures are taken from a random look at some published circuits.) In a microprocessor there may be at least 3000 gates.

The inefficient way orthodox gates operate Boolean logic has set more than one microelectronics engineer or scientist thinking of possible better circuits, but large manufacturers have had such enormous success in getting thousands of gates on a silicon chip, making it a cheap device, that they are interested only in competitive technological improvements in getting more and more on less and less. There is no reason why they should be interested in fundamental changes in logic. In the market for small-quantity, custombuilt chips things are different.

Mathematical

The approach of Dr Hurst and his colleagues is fundamental yet unconventional. In trying to find out whether one could get a basic circuit that would do whatever logical step was needed, according to the connections and the programming, their thinking was

			Section 1988 Section Section 2015
Contraction Discount Date with	ULG2	NAND	NOR
Total number of cells or gates to realize all 256 functions	683	1118	1124
Average number per function	2.67	4.36	4.39
Maximum number per function	4	7	7
Average number of cell/gate connections per function	10.68	17.44	17.56

Table 2. Comparison between the capabilities of ULG2 cells and those of orthodox gates. The table shows that the ULG2 is roughly twice as powerful as a NAND or a NOR gate.

primarily mathematical: it made use of esoteric techniques such as set theory, Walsh functions and so on. They were able to show that a universal logic gate was indeed a possibility. With two input variables there are 16 possible output functions (see Table 1, which is an exercise to see what functions could be obtained from various gates). For three input variables there are 256 possible output functions. Could a single circuit cope?

Calling the circuits ULG2 (universallogic gate for two input variables) and ULG3, Dr Hurst has shown that an array of ULG2 gates will do all the logical steps possible even for three input variables and that one ULG3 will be capable of realising all 256 outputs not all at once, of course, for the result depends on which input terminals are used and how the circuit internal wiring is connected.

The number of ULG2 cells needed to realise all the 256 functions of three input variables has been calculated and compared with the equivalent figure for orthodox gates. The results are shown in Table 2. We can see that the ULG2 is roughly twice as powerful as a NAND or a NOR. Incidentally, it should be noted that although a ULG2 may have only two independent variables as input, there may be three or four physical connections. Figure 1 shows a circuit for a ULG2. It has two transistors, two diodes, and three resistors. Though there are but two input variables, there




Figure 1. Basic circuit of a ULG2, comprising two transistors, two diodes and three resistors. Although only two input variables are applied, three input connections (s, t and r) are provided. This is to do with the set-theory mathematics of the device.

primarily mathematical: it made use of esoteric techniques such as set theory, with the set-theory mathematics of the device and need not concern us.

The electronics of the circuit need not be considered in detail. A gate is made of transistors, diodes, resistors and, sometimes, capacitors. Up to now most logic gates have depended on bipolar technology, that is, transistors with two possible states. This is the one represented in the diagram. A newer technique is based on MOS (metaloxide-semiconductor) devices, which involve far fewer states in manufacture and avoid the 'cross-talk' between adjacent conductors. Silicon Microsystems is very much committed to MOS technology and Dr Hurst considers that bipolar methods will die out in the next decade and be replaced by MOS circuitry.

The practical problem is concerned with how big an area of silicon is used up in a ULG as compared with orthodox gates. It is easily seen that a ULG3 would occupy much more space. So is it better to use an array of identical ULG2s or rely on a ULG3? These are the questions being looked into at Bath now. The answer may be a compromise. When such matters are decided there will be available a set of universal logic gates which can be supplied as units. All that the designer then has to do is produce a suitable mask, a task made simple by computer-aided design, which will deposit the appropriate interconnections on the chip. The cost of design for a custom-made device will therefore be drastically reduced, even if the ULGs are themselves more expensive than orthodox gates - another question being researched.

Furthermore, as Dr Hurst has said, a considerable amount of special logic design in ULG form can be undertaken and a library of standard interconnection details built up, ready for individual customer requirements. It is a long-term research development programme for which full-time staff will be recruited. It could lead to a commanding position in the ever-growing use of silicon chips for specific purposes.



HEY EXPERIMENTERS...LOOK AT THIS! Amazing 'CALL JOTTER' Telephone

Answering Machine is one! This is the affordable answering YES, you can afford this one! (files is the affordable answering machine can be connected to any phone and comes complete with it's own power supply. BUT IT'S MORE THAN AN ANSWERING MACHINE:

As a phone monitor
 As a diction/transcriber for the business person
 As a diction/transcriber for the business person

As a tape recorder – play your favourite cassettes on it!
 Uses standard cassettes!!!

d with all these features, it'll GET YOUR MESSAGES THROUGH TO YOU! NOTE: This machine is not Australian Telecom

DROP IN & CHECK OUT OUR METAL DETECTING BOOKS! GREAT

ONLY

G MELODIES?

If you want to build that

The TMS1000 is a dedicated musical IC as

used in our programmable mini organ. (see catalogue). IMAGINE THE USES!

WHAT A PICK-UP!

TUNER • Accepts 12-16V DC
• Overload protection.

AM/FM

special door chim c organ or even just to experimen this amazing IC is where you start!

mun

se features:

Loop stick AM an

Built in FM muting

Built in 19kHz no filters MPX stage.

Output preamp.

High image reject

\$6950

\$0

THOSE TOYS AWAY... offset by the fact that it easy to use. So look at my price

> \$149 WHO KNOWS ... TT COULD LEAD YOU TO A FORTUNE!!! THOUSANDS SOLD!

drill with this neat kit. Control

to slow down to the re large holes can be

ns AND IT'S

metal even CONTROL

\$1350

its speed to slow down to the

thick

WATCH

THIS SPACE

AND FIND OUT WHAT YOU MISSED

Each month all of our stores feature an

outstanding special which is actually

BELOW COST! N.B. Specials are strictly

LAST MONTH: VERSATILE TOOL BOX. Cat. H-2600 Was \$22.90. Reduced to \$14.12!

SAVING \$8.78!

while store stocks last.

Don't miss out!

FOR SAFE

S. C. S. BUDGET KEY for the novice or any-one who wishes to **LEARN THE** earn the code. Spring CODE

complete and ready to go the computer stc, who want to build their own computer console. This would also be the PERFECT MONITOR for use with our NOVA 80 computer of the compu

there is only a limited n

kit. Hurry — there is stock! Cat. X-1199

S ension adjusts. As tension adjusts. As used in the Morse Teach yourself Morse Practice kit in Dick Learn Morse the easy way. These tapes mith's Funway kits. will teach you in the convenience of you own home (or shack). Speeds from 5wpm to 15wpm in graduated steps. Ideal for Novice licence or 'Z' calls. GIVE' IT A GO!!! Cat. D-7106 Cat. D-7105

mm COLOURED GLOBES Great 100W par 38

> Yellow S-3850 Red S-3852 Blue S-3854 1

Cat. K-3140

TRANNIES?

HI EFFICIENCY POWERSINK

or those big jobs Mounting surface temp. rise above

ent 60°C @

H-342

lest possible heat diss in smallest possible pace. The pprox. 5°C/Watt, at. H-3400 .

TO-3 POWERFIN

30W heat diss.

75mm H-3422

re on bulk purchases!

\$3.50ea \$9.50ea

\$1.25ea

PARTY TIME!

YOU ASKED FOR THE STERE IT THE NEW YOUR BOLLET ARE MAN THE NEW YOUR BOLLET AND Get your party going with this versatile Musicolor kit. Accepts an audio input from almost any amplifier and uses the information to control 3 channels of light. Easy to build. It will provide endless enjoyment to you and your friends

GREAT SOLAR CELL!

lar cell sector with a very high output -450mV @ 95mA (45mW per cell). Join COMING them together for higher outputs in voltage & SOON! current. The versatile 60 degree segment can be

rent. The versatile 60 degree segment can be rent. The versatile 60 degree segment can be red together to form a 60mm dia. circle (in 6 \$250 IT'S EASY TO SOLDER TO! Think of the

NEW

Learning has never been so enjoyable.

SPEAK & SPELL It actually talks! 200 most commonly miss-spelt words. Complete w 32 page guide.

SPEAK & READ

reading comprehension. Offers 6 games 6 activities to play. Use alone or with friends. Makes it ideal for migrant English education! Complete with 64 page book: 'You can Read!' Cat. Y-1313 \$99.00

SPEAK & MATH

The microprocessor IC in this unit can generate over 100,000 maths problems & talk to you; giving you a problem & telling you if you're right or wrong. Added games make learning fun. Supplied with 32 page book; 'Math Talk'. Each unit has a battery saver device

problems are over! Use up to 3 anti-

problems are over Use up to 3 antennas for your CB. Ham radio. Handles. 150 awatts at 30MHz. Ideal for base or amobile use! Cat. D-520B s650

PARTS FOR NEW KITS

See also our advert elsewhe re in this magazine with new kits since our last catalog.

HOT CANARY (See EA May) Complete kit, inc inst. K-3395 H-8396 \$14.95 SPEED SENTRY (See EA May) mplete kit, inc. inst. H-8399 \$1.95 INFRA RED REMOTE CONTROL (See EA May)

Full kit, inc inst. \$63.95 . K-3380 . H-8397 \$6.95 dB METER (See EA May) mplete kit, inc inst... H-8398

UHF TV DOWNCONVERTER (See ETI May) Full kit, inc inst. \$32.50 K-3235

UNIVERSAL RELAY DRIVER (See ETI May) H-8638 (All parts for this kit are normal stock line

SYSTEM 80/TRS 80 SERIAL INTERFACE (See EA April) full kit, inc. inst. \$57.50 \$7.95

INFRA RED BEAM RELAY (See EA April) Full kit, inc. inst. K-3375 H-8395 \$37.50 \$3.95 CORE BALANCE RELAY (See ETI Ap

Full kit, inc. inst. . . . PCB only. H-8635 \$4.50 NEGATIVE ION GENERATOR (See ETI April)

Complete kit, inc. inst. K-3335 PCB only H-8634 \$41.95 \$3.95

(Above prices & dates are from magazine estimates only. We cannot guarantee that the articles will appear when specified. * Price unavailable at time of going to press).



Want to save a hi heap on batteries? Try these value-They're dearer at the start, but you vant to save a neap on patteries: Iry these value waked MiCads! They're dearer at the start, but yo, van charge them over and over again! Ind now we have 'C' &' D' size NiCads, too. at bargai prices! So why not up-date now and start saving!

NOTE: 'C' & 'D' NiCads come in packs of two; 'AA' size licads are supplied individually

'C' SIZE 1.2Ah Cat. S-3302 Pk 2: \$7.50 Cat. S-3304 Pk 2: \$7.95 Cat. S-3300 Each \$2.05 'D' SIZE 1.2Ah POPULAR 'AA's Save more if you buy in bulk!!!

NICAD BATTERY CHARGER

Great for charging anything up to 12 volts! Will charge from six to ten 1.2 Volt batteries at a time. The current automatically adjusts FULLY APPROVED and it's only

50



BEST!

Uur most popular switches. Low in cost, high in quality. Ideal for many applications.

DPDT Sub Mini Silde Sw. S. 2010. 40Cea
SPDI Toggle. 24UAC1 5A. 5.1173. \$1.45
SP Mini Push Button. Nor open. S-1102. 45c
DPDT Toggle Sw. 240VAC 3A. S.1393 \$2.75
We have micro switches, pushbuttons, rotary switches. We have micro switches, pushbuttons, rotary switches, illuminated switches, PCB DIL switches & MUCH MORE! Compare our prices, You'll save even more if you buy in bulk!

DROP IN & SEE OUR HUGE RANGE!

SCR's & PUT's. Easy to build be is ideal for bepiners, servicemen & schools. A patient

ocnools, A valuable piece of test equipment Cat. Get rid of bad smells dust & other pa

nere portable fluoro light 'MIX'

comes complete with cigarette comes complete with cigarette lighter plug. Use a a map preading light, for the caravan boat, garage etc.

Well...not Versatile and quite, but this inexpensive unit can mix 4 signals Y-1082 (mic, tuner, T table etc)

WOULD YOU LIKE TO WORK WITH US?

Dick Smith Electronics is expanding— if you've been watching your local press you'll probably have noticed this already!

Opening new stores requires new staff. Good staff. Electronics enthusiasts who can be trained to become pro-fessional sales people and managers. If you're talented and enthusiastic, we offer good wages and conditions. If you're above average, promotion can be very rapid. (One of our salesmen became general manager three years later!)

you'd like to work with us, drop us a line. When we open a store in your area, we'll be in touch . . .

Send your application to: The Personnel Manager, Dick Smith Electronics Pty Ltd PO Box 321, North Ryde, NSW 2113

WOULD YOU LIKE TO BE A DICK SMITH RE-SELLER?

How would you like to join the hundreds of successful Dick Smith re-sellers, spread right across Australia? If you're interested, why not give our wholesale division a call - Sydney (02) 888 3200, 9AM - 5.30PM weekdays. It could be the start of something big

Cat. H-3400 UNIVERSAL ALUMINIUM niversal hole patte allows mounting of BOD . almost all powe 98¢ea. MINI ALUMINIUM Ideal PCR m ransistors, SCR's, Triacs

VERSATILE POWERSINK

Mount flat or end on. Has side groo onnection. Accepts 2 x TO-3's drilled: H-3460

75¢ea.

\$5.50ea.

\$1

495

Cat. Y-1310 \$89.00

30MHz cut off low loss 50


NEW GENERATION IN UHF CB. The deluxe Apollo 40 ch **UHF Transceiver**

Until now, you've really had no choice in buying a UHF transceiver. With the new Apollo AP400 you'll surprise your contacts with a good clear sound – standing out from the crowd. This amazing breakthrough in UHF technology makes it ideal for small busines or rural applications. Great for use in the car on the way to work or as a high selectivity to eliminate cross channel interference.

Just look at these features:

- Large illuminated SRF meter.

- Tone control



Performance you just couldn't find in less expensive equipment.



It's got to be the best ever so far... 12 LEVEL CHESS COMPUTER

This magnificant and attractive unit has 12 different levels of skill enabling you to learn gradually. It even plays of skill enabling you to learn gradually. It even plays against itself! A must for any professional or serious chess player. You'll have to see for yourself the number of incredible features it has.

Cat. Y-1256.

Don't pay \$1000 or more our price is only:

\$24500

Complete with chessmen WHOLESALE MAIL COMPETITION

earning to play Chess?

Improve your skills with this Chess Master learning aid. You can soon play like a professionall Solve problems in the least number of moves. Play alone or with others and experience the different play the properties at the street of the street was the street of the st tactics and checkmates etc.
Complete with 7 booklets
each containing 50 moves –
that's 350 moves to play!

Did you miss out?

Last month EA & ETI included our FREE 1981 catalogue packed with goodies for the eager enthusiast If you missed out don't worry. Just send 75¢ (P&P is free) to our Mail Order Centre. Address

System 80 computer and other great goodies

Congratulations to: 80 16K personal compute

Stephen Morton: Nightcliff N.T. - 2nd prize: Dick Smith Telephone Answering Machine com Colin Laidley: Coffs Harbour NSW

PLUS 100 FUNWAY VOLUME 2 BOOKS

GIVEN AWAY!!!

Dick Smith & Staff



Catalogue

Correction

Due to an oversight, the price and catalogue number for a discontinued printer were shown on page 6. The correct catalogue number for our new low-c printer is X-3252 and the pr is \$495.00.

Dick Smith & Staff.

THE LOVE OF

of sizes; fitted with rubber feet great! SIZE 102 x 56 x 83 Cat H-2741 150 x 61 x 103 Cat H-2742 150 x 76 x 143 Cat H-2743 184 x 70 x 160 Cat H-2744 \$2.75 \$4.35 \$4.90 \$5.45 \$2.55 \$3.95 \$4.40 \$5.00

DICK'S ZIPPYS ARE BEST!

es with slotted sides unting of PCB's etc.

\$2.50 \$2.00 \$3.75 \$3.00 \$1.95 \$1.60 \$1.50 \$1.20

Our 2nd Perth store is **NOW OPEN**



- NSW AUBURN: 145 Parramatta Rd. 648 0558
 - BLAKEHURST: 613 Princes Hwy. 546 7744.
 - BROADWAY: 818 George Street. 211 3777 BROOKVALE: 531 Pittwater Rd. 93 0441.
 - CHULLORA: 147 Hume Hwy. 642 8922.
 - GORE HILL: 162 Pacific Hwy. 439 5311
 - PARRAMATTA: 30 Grose Street. 683 1133.

 - SYDNEY: 125 York Street. 290 3377.
 WOLLONGONG: 263 Kiera Street. 28 3800.

DICK SMITH MAIL ORDER CENTRE:

PO Box 321, North Ryde, N.S.W. 2113. Ph: (02) 888 3200. SERVICE CENTRE: LANE COVE & WATERLOO RDS, NORTH RYDE NSW 2113. PHONE (02) 888 3200, 9AM TO 5PM, MONDAY TO FRIDAY ONLY.

ACT • FYSHWICK: 96 Gladstone Street. 80 4944

QLD • BURANDA: 166 Logan Rd. 391 6233

• CHERMSIDE: 842 Gympie Rd. 59 6255

ADELAIDE: 60 Wright Street. 212 1962

 MELBOURNE: 399 Lonsdale Street. 67 9834. VIC

RICHMOND: 656 Bridge Rd. 428 1614.

SPRINGVALE: Dandenong & S'vale Rds. 547 0522.

PERTH: 414 William Street. 328 6944.

• CANNINGTON: Wharf St & Albany Hwy. 451 8666 SHOP HOURS: 9AM TO 5.30PM MONDAY TO FRIDAY; NOON SATURDAY. Brisbane stores half hour earlier). Some stores are open on late nights: please phone your local store to check before coming in!

PRICES CORRECT FOR MONTH OF PUBLICATION OR WHILE STOCKS LAST.

MAJOR DICK SMITH RE-SELLERS: Listed below are re-sellers who stock a large proportion of our range. However guarantes that they will have any or all of the items, or at the same prices, as those s

ATHERTON, QLD: Tableland Radio Service BENDIGO, Vic: Sumner Electronics 95 Mitchell Street, Phone 431 977 BLACKHEATH, NSW: Goodwin Electronics BROKEN HILL, NSW: Crystal TV Rentals 66 Crystal Street. Phone 6897 CAIRNS, QLD: Thompson Instrument Services 79-81 McLeod Street. Phone 512 404 COFFS HARBOUR, NSW: Coffs Harbour Electronics
3 Coffs Harbour Plaza, Park Ave. Phone 525 684

DARWIN, NT: Kent Electronics 42 Stuart Highway, Phone 814 749 DUBBO, NSW: Selekta Sound.

EAST MAITLAND, NSW: East Maitland Electronics. Cnr Laws & High Streets. 337 327 FAIRY MEADOW, NSW: Trilogy Wholesale Elect. 40 Princes Hwy, Phone 831 219

GERALDTON, WA: KB Electronics & Marine 361 Main Terrace. Phone 212 176 GOSFORD, NSW: Tomorrow's Electronics & Hi Fi 68 William Street. Phone 247 246 HOBART, TAS: Aero Electronics KINGSTON, TAS: Kingston Electronics & Records Channel Court. Phone 296 802 LAUNCESTON, TAS: Advanced Electronics 5a The Quadrant. Phone 317 075 LISMORE, NSW: Decro Electric
Mangulan St & Bruxner Hwy, Phone 214 137 MACKAY, OLD: Stevens Electronics MARYBOROUGH, QLD: Keller Electronics 218 Adelaide Street. Phone 214 559 MORUYA, NSW: Coastal Electronics MT GAMBIER, SA: Hutchesson's Communications 5 Elizabeth Street. Phone 256 404 MUSWELLBROOK, NSW: Silicon Chip Electronics Suite 3 98 Bridge Street. Phone 43 1096 NAMBOUR, QLD: Nambour Electronic Shop NEWCASTLE, NSW: Elektron 2000

ORANGE, NSW: M&W Electronics 48 McNamara Street. Phone 626 491 ROCKHAMPTON, QLD: Purely Electronics SOUTHPORT, QLD: Amateur's Paradise 121 Nerang Street. Phone 322 644 TAMWORTH, NSW: Sound Components 78 Brisbane Street Phone 661 363 TOOWOOMBA. QLD: Hunts Electronics
18 Neil Street. Phone 326 944 TOWNSVILLE, Qld: Tropical TV 49 Fulham Rd, Vincent Village. Phone 791 421 TRARALGON, VIC: Power'N'Sound WAGGA. NSW: Wagga Wholesale Electronics WINDSOR, NSW: Hawkesbury Electronic Centre

WODONGA, VIC: A & M Electronics WHYALLA NORRIE. SA: Mellor Enterprises

There's a re-seller near YOU!

BUYING BY MAIL?

P&P \$1.00 ORDER VALUE: \$5 (min) to \$9.99 \$10.00 to \$24.99 \$25.00 to \$49.99 \$50.00 to \$99.99 \$100 or more \$2.00 \$3.00 \$4.00 \$5.50

NOTE: These charges apply to goods sent by post in Australia only. Large and bulky items cannot be sent by

post
If you prefer, we will despatch your order by Comet Road
Freight to anywhere in Australia for only \$7 00 that's
below what it costs us! Large and bulky items are
normally sent by Comet unless you specify differently
(eg by rail or air – you pay freight on delivery)

COMPUTER HOTLINE

Want to know more about our computers? Or maybe you're having problems and need advice. For friendly, helpful information on System 80 or Sorcerer computers, or on any of our peripherals, phone our Computer Hotline:

Monday - Friday, 9 - 5.30 888 2002 on Sydney (02)

Dear Customers.

Duite often, the products we advertise are so popular they within a few days. Or unforseen circumstances might h within a few days. Dr unforseen circumstances might hold up goods so that advertised lines are not in the stores by the time the advert appears. Please don't blame the store manager of staff; they cannot solve a dock strike on the other side of the month they cannot solve a dock strike on the other side of the world, or even locate a shipment that has gone astray.

What we are trying to say is that, if you are about to drive across town to pick up a particular line at a Dick Smith store, why not give the store a ring first (addresses and phone numbers

Dick Smith and Staff

NDK S-4000

SAMPLE

$$F(\omega) = aT \frac{\sin \omega T/2}{\omega T/2} e^{-j\omega T/2}$$

$$e_{RMS} = \sqrt{4KTR(f_2 - f_4)}$$

$$L_i = 10 \log \frac{1}{80} \times S_{\bullet} (dB)$$

A2+B2=C2

H₂SO₄ H₂O

$$W_{xy}(f) = \int_{-\frac{\pi}{2}xy}^{\frac{\pi}{2}} d\tau e^{-j2\pi r\tau} d\tau$$

$$L = \int_{0}^{x} \sqrt{\left(\frac{dx_{1}}{d\theta}\right)^{2} + \left(\frac{dy_{1}}{d\theta}\right)^{2}} d\theta$$

$$\psi_{xy}(f) = \tan^{-1}\left[\frac{P_{xy}(f)}{C_{xy}(f)}\right]$$

$$a_1x+b_1y=c_1$$

 $a_2x+b_2y=c_2$

$$x = \begin{vmatrix} c_1 & b_1 \\ c_2 & b_2 \end{vmatrix} \div \begin{vmatrix} a_1 & b_1 \\ a_2 & b_2 \end{vmatrix} = \frac{c_1b_2 - c_2b_1}{a_1b_2 - a_2b_1}$$

 $S = \sum_{j=1}^{n} X_{j}$

Δf max T max ≤0.3

$$\left|W_{xy}(f)\right| = \sqrt{C_{xy}^2(f) + Q_{xy}^2(f)}$$

 $\Psi_{xy}(\tau) = \lim_{\tau \to \infty} \frac{1}{T} \int_{0}^{\tau} f_{x}(t) f_{y}(t+\tau) dt$

\$3,190 C.O.D.
STAND\$160
SALES TAX\$390

OPAL 2000C

The OPAL 2000C is an 8 slot S-100 system conforming to the new IEEE standards. The system uses a 4Mhz Z80 CPU and has 3 serial RS232c serial and 3x8 bit bi-directional parallel ports. The disk controller, is California Computer Services' multi-mode model (able to control both 5" and 8" disk drives).

Memory is provided by a 4 MHz 64k dynamic RAM Board by Measurement Systems and Control. The memory board is fully bank selectable and is designed for upgrading to a multi-user system.

Disk drives are 2x8" QUME double density, double sided disk drives with a total on line capacity of 2.4 megabytes (1.2 megabytes per 8" disk).

The system is mounted in an attractive pressed Aluminium housing with a cast front panel fitted with reset button and key operated on/off switch. The power supply is equipped with a line filter.

The operating system software is CP/M version 2.2 An extensive monitor is included. The OPAL 2000C will read and write on any of the following formats or exchange information between any combination on A and B drive:

IBM 3740 Single Density single sided disk	240k
bodble Delisity Single sided disk	180 6001
Single Density Double sided disk	1001.
Double Density Double sided disk	12 mbutas
Introductory Price: \$4,975.00 plus \$600.00 sales ta	ix.

LIFELINES

Lifelines is a monthly software newsletter published by Lifeboat Associates.

Although Lifelines contains features and columns dealing with new software products on the market, product comparisons, the CP/M Users Group and other items of general interest, the principal role of the periodical is to provide timely notice to owners about their software. Each month, new revisions are reported, together with information on the purpose for each such release, be it for the correction of "bugs" or the addition of features and facilities.

The software products distributed by Lifeboat Associates are frequently both complex and costly. We recommend that all serious users of software should take out subscriptions to Lifelines, ensuring that they are automatically informed about the current state of their software tools and thus get full value for their purchase.

Subscription Costs:

\$36.00 for 12 issues. Price includes postage for anywhere in Australia. \$5.00 each for back issues. Price includes postage for anywhere in Australia.

All orders must be prepaid.

Prices and specifications are subject to change without notice.

Send \$1.00 for our Hardware Catalogue which describes our complete range of NDK printers, OPAL systems and contains a summary of CP/M software.

The SOFTWARE OMNIBUS (\$5.00) contains a complete description of all Software retailed by John F Rose Computer Services Pty Ltd together with user feedback and information about software versions.

FMS-80

FMS-80 is a comprehensive file management system, designed for use by everyone from novice to advanced programmers. It is the first complete data management system for CP/M, MP/M or CDOS. The program is completely menu-driven using a set of interactive integrated component programs.

FMS-80 leads you interactively through defining file and record descriptions, making additions, deletions and corrections and generating reports from your data files. FMS-80 will help you define selection criteria, to extract information for your reports by upper and lower limits, specific values for fields, relative values among fields, ac-

ross multiple files, etc.

For example: All employees between the ages of 40 and 50 who received an annual salary greater than \$20,000.00. With FMS-80, selection criteria can include logical connections between fields or among groups of fields. Reports and printed summaries are easy to produce. FMS-80 leads you interactively through its report generation program; asking questions and producing reports only with the information you request, placing data in any format on a page or across multiple pages. Thus you can fill in prepared forms and create reports to fit your own unique specifications. Using the report generator's math functions, summaries, price extensions, etc., are all readily available at print time.

File definition allows you to interactively tell the computer how to keep track of desired data. Each record of information can contain up to 255 fields with each field containing up to 255 characters. Altering field size or addition and deletion of fields allow data files to grow and change with

your needs. Duplicate data entry is eliminated. FMS-80 allows you to specify which field or fields constitute a Master key or various secondary keys. The system uses these keys to build indexes for rapid retrieval of any record in a file when performing updates or queries. Any field may be used by record selection, even though it was not previously selected and defined as a key field. Data files can be recorded into various sequences to allow display of data

ordered to your specifications.

FMS-80 selection features allow you to extract data from a file using your own specifications. Data can be selected by a range of values, conditions (equal or unequal), or relations to other fields. After a record has been selected using your specifications, the data can be summarized, stored in another data file, or printed. Regardless of complexity, selection never requires more than a single pass of the file. Using the advanced features of FMS-80, program like commands allow data selection and extraction from multiple files.

FMS-80 can specify the format on the screen for data display and collection. A complete form can be outlined on the screen to ease data entry. If your data collection requirements will not fit on a single screen, you can define multiple screens in each screen definition. Through the extended file maintenance (EFM) feature, data from multiple record and multiple files can be displayed simultaneously on a single screen. In addition to the normal error checking of alphabetic and numeric type data, EFM allows specific data entry validation.

Using FMS-80 application programs or other non-related programs can be executed. Not only can a single program be invoked, but a series of programs can be linked and executed by selecting a single menu entry. (for example WORDSTAR/MAILMERGE, General Accounting Package (GAP), DATASTAR, etc., can be called from a single master menu). Application programs could be written in CBASIC (or BASIC-80) and run using FMS-80 files.

FMS-80 allows 3 methods of generating printed reports. The simplest method allows the system to format printed data in columnar fashion. With the FMS-80 report generator you can define the format of the data printed for such things as cheques, statements and order forms, or simply arrange the data the way you want it to look. Any number of "header" or "footer" lines can be defined as well as page length and width. Multiple records can be placed on a page or a single record can fill a page or multiple pages. FMS-80 will paginate, fitting the correct number of entries on each page. Using the contents of the data fields, a variety of functions can be controlled. "Header" or "Footer" substitution, new page control, math functions performed, or summary lines can all be accomplished. The most powerful report generation is accomplished through EFM. In addition to the above features, data can be drawn from multiple sources, including the terminal or multiple

The QUERY function allows online browsing of a data file. Any previously built indexes and/or screen descriptions

may be used when retrieving data.

FMS-80's Extended File Maintenance (EFM) brings the full capability of FMS-80 under full control. EFM allows you to develop applications faster than programming in BASIC or other languages because all the complex screen and report handling functions are handled for you. Split screen formatting, multiple data file access and generation and selection are some of the features provided. Additional EFM capabilities include:

Processing up to 20 files at a time.

Reformatting and expanding data records and files.

- Combining multiple input files along with terminal input to produce one or more output files, printed reports or terminal display.
- Math functions including addition, subtraction, multiplication and division on fields containing numeric data.
- Control statements available when creating an EFM request include CALL, IF-THEN-ELSE, SWITCH/CASE and GOTO.
- End of file and on error conditions for the file input/output are supported.
- Extensive screen handling and printer handling are av-

Price: \$950.00 (Quantity discounts are available).

Formats: Micropolis Mod II (Q2), Northstar Single/ Double/Quad (P2), 8" IBM. (a1).

JOHN F. ROSE

33-35 ATCHISON STREET, ST. LEONARDS, N.S.W., 2065, AUSTRALIA. TELEPHONE: (02) 439 1220 TELEX: AA 27901

Wordsquare — a game for the TRS80

A. Lacy

Simpler than Scrabble, cheaper than crosswords and more humane than Hangman, we present Wordsquare, your very own cure for insomnia.

THIS PROGRAM is designed to run on a Level II TRS80 equipped with a printer, and it occupies under 4K bytes. It accepts a list of words and then constructs a word puzzle of the type you have, no doubt, seen for sale in newsagents.

I find this program very useful; the puzzles it produces keep my family occupied for hours on end while I am at the keyboard! It is designed to be used by 'non-computer' people, and this is the reason for the emphasis on input error trapping and the 'chatty' style of the prompts.

Many of the statements are special features of the TRS80, notably CLS, which clears the screen, and INKEY\$, which is a single keyboard scan and does not need the 'ENTER'. I believe the PET has a similar statement called 'GET'. Only one PEEK is used and this is not essential to program operation

anyway, which should please some readers.

The wordsquare and the word list to be used are represented by string arrays S\$(n,m) and W\$(n) respectively. The program attempts to find vacant areas or matching letters in the array S\$(n,m) and put in the words from W\$(n). It will try all directions, including backwards and diagonally, and a fair amount of string handling takes place. Not surprisingly, the program can take several minutes to run; in fact it will sometimes appear to 'hang' and won't even respond to the break key. This is due to the fact that the TRS80 has to reorganise its string storage areas occasionally and ignores the keyboard while it is doing this. (This is called Garbage Collection.)

When the puzzle has been constructed it will first be displayed on the screen without the usual jumble of random letters; you can cheat at this point if you wish. The video display section is included for debugging and checking purposes; if you wish to remove it then delete lines 730-800. There is an option for suppressing the usual list of words which are included in the puzzle, which makes it much more difficult, the only clues given in this case being a list of dashes corresponding to word lengths. I have included an example of each option; I am sure readers will find them trivial!

The word list W\$(n) is sorted into words of descending length because this reduces execution time by allowing the longest words to be put into a nearly vacant array first, the shorter words then being fitted around and through them.

The randomising methods used ensure that no two puzzles are similar even though they may contain the same words.

SALTY

F P U Y Y Y O K R V B Z F L L PERIWINKLE V P E R I W I N K L E E Y X N SEASHELL X E R U M E Q S L E S S U M C STARFISH Z C L A M W H S I F R A T S N SCALLOPS N S B S L O N E S L I M P E R ABALONES K L E H W C S O B R O Z A R U COCKLES E U C H I D C E C O Y S T E R COWRIES P C O N C H A A A O L Y L J O MUSSELS K T W R H I L F T S C R Z E Y OYSTER T R R T Q P L S S J H K A X E LIMPET N D I J F K O T X Y X E L E B RAZOR V N E H I M P K R X S X L E P CONCH S H S C Z N S B Z G S N G L S WHELK M S F P S O X C Q L T U A G U PEARL W P L M S C B S K L J Y T O Z MUREX

Two specimen "Wordsquares" as produced by the program.

BYTE THIS

ZCLOADYXLNUWYNC
QTUYAHDUOADDGOB
FITARFEXWONWWIE
EEWSTARPMAIGKTN
YJENSWNETZFBMUC
YADOTGNITUPMOCH
TINTEGERBNRQTEM
MSOFTWARETIXWXA
IINTERRUPTZRBER
GMICROSOFTPPPWK
BHEXADECIMALFKS
HBLRENITUORBUSD
MHTIROCLACH
MHTIROGLAQUURQX
BCKRYOLSGUBEDZP
CPJQDDRLEDJKKEW

W	ead	WINDS TO SECURITION			
Variables u A,C,D,G,P,X,I	Counters temporary storage integers.	Q\$	Temporary storage for single letter replies.	S\$(n,m)	The string array representing the wordsquare.
C(n)	List of shuffled vertical coordinates.		List of shuffled horizontal coordinates.	T\$ W\$(n)	Title. List of inputted words.
C1,C2	Temporary storage for vertical coordinates.	R,R1,R2	Temporary horizontal coordinates.	W1,W2	Pointers into W\$(n). Used in row and
D(n)	List of shuffled	S\$	Temporary storage inputted words.	A1,A2	column shuffle.

putted words. directions. Program listing -Q\$ = INKEY\$:IF Q\$ = " " THEN 670 IF Q\$ = "S" THEN RUN ELSE CLS:GOTO 730 REM**GET THE NEXT WORD REM WORDSQUARES 680 20 690 REM INITIALISE 30 NEXT W1 REM PRINT OUT THE ARRAY TO SCREEN 40 PRINT@600, "GOT IT!!!!"; CHR\$(30):: FOR A = 1 TO 800: NEXT: CLS CLEAR 400 50 DEFINT A-Z 60 FOR R = 1 TO 15 DIM C (15), R(15), D(8), W\$(16), S\$(15,15), R2(15), C2(15) 70 PRINT TAB (20) "WORDSQUARES" PRINT TAB (20) " PRINT 740 PRINT TAB (20) " YOU WILL NEED A PRINTER FOR THIS PROGRAM. TYPE IN A LIST OF UP TO 16 WORDS OR TYPE '@' IF YOU WISH TO USE LESS. THE MAXIMUM NUMBER OF LETTERS FOR C = 1 TO 15 IF S\$(R,C) = " "THEN PRINT". ";:GOTO 780 80 750 90 760 PRINT S\$(R,C);" "; IN A WORD IS 15, BUT IF YOU" PRINT "USE TOO MANY LONG WORDS THE PROGRAM WILL TAKE 780 PRINT"PRESS A KEY"; 790 AGES TO RUN. IN FACT IT MAY NOT BE ABLE TO FIT YOUR WORDS IN IF INKEY\$ = " " THEN 800 AT ALL! IF SO IT WILL TELL YOU (EVENTUALLY)" REM**SHUFFLE COORDINATES CLS REM**PRINTER.STATUS CHECK (OPTIONAL) 100 FOR A = 1 TO 15:C(A) = A:R(A) = A:IF A < 9 THEN D(A) = A GOSUB 1260 REM**PRINT TO PRINTER 120 840 PRINT"TYPE IN A TITLE FOR YOUR WORDSQUARE THEN PRESS 130 850 FOR A = 1 TO 15 140 R1 = RND(15):R2 = RND(15):X1 = R(R1):X2 = C(R2):R(R1) = R(A):150 860 PRINT C(R2) = C(A):R(A) = X1:C(A) = X2INPUT T\$ 870 PRINT"BY THE WAY, DO YOU WANT THE WORDLIST PRINTED AS 160 REM**INPUT WORDLIST PRINT"NOW TYPE IN YOUR LIST" 880 170 WELL? (Y OR N)" Q\$ = INKEY\$: IF Q\$ = " " THEN 890 890 FOR W = 1 TO 16 INPUT S\$:IF S\$ = "@" THEN 280 IF Q\$<>"Y" AND Q\$<>"N" THEN 890 LPRINT TAB(25)T\$ 900 200 910 IF W = 1 THEN CLS:PRINT@2,S\$ LPRINT TAB(25)STRING\$(LEN(T\$),"-"):LPRINT 920 W\$(W) = S\$ 220 REM**TEST THE WORD FOR LENGTH AND CONTENT, S IS ERROR FOR R = 1 TO 15 930 230 FOR C = 1 TO 15 940 IF S\$(R,C) = " " THEN LPRINT CHR\$(RND(26) + 64);" ";ELSE LPRINT FLAG 950 S = 0240 S\$(R,C);" "; GOSUB 1030 250 NEXT C 960 IF Q\$ = "N" THEN LPRINT TAB(48) STRING\$(LEN(W\$(R)),"-")ELSE IF S = 1 THEN 200 260 970 270 LPRINT TAB(48)W\$(R) 280 W = W-1CLS:PRINT@590,"THIS COULD TAKE ME A FEW MINUTES"; IPRINT 980 290 NEXT R 990 REM "SORT WORDS, LONGEST FIRST IF Q\$ = "N" THEN LPRINT TAB(48)STRING\$(LEN(W\$(R)),"-")ELSE 300 1000 **GOSUB 1190** 310 LPRINT TAB(48)W\$(R) PRINT@590, CHR\$(30); FOR X = 1 TO 4:LPRINT:NEXT:RUN REM**INPUT TESTING 320 REM . CHOOSE THE NEXT WORD 330 1020 IF LEN(W\$(W)) > 15 THEN S = 1: PRINT"THIS WORD IS TOO LONG, TRY FOR W1 = 1 TO W 340 REM**RANDOMISE DIRECTIONS FOR A = 1 TO 8:R = RND(8):X = D(R):D(R) = D(A):D(A) = X:NEXT 350 AGAIN": RETURN 360 FO A = 1 TO LEN(W\$(W)) 1040 REM**CHOOSE A COORDINATE 370 S\$ = MID\$(W\$(W), A, 1) 1050 FOR R = 1 TO 15 IF S\$ <"A" OR S\$ > "Z" THEN S = 1:PRINT"LETTERS ONLY PRINT@600,"THINKING"; FOR C = 1 TO 15 1060 390 PLEASE.": RETURN 400 1070 RETURN R1 = R(R): C1 = C(C)410 REM . HORIZONTALS AND VERTICALS 1080 REM**CHOOSE A DIRECTION 420 R2 = R1 + 1:RETURN R2 = R1 - 1:RETURN 1090 FOR D = 1 TO 8 430 REM . CAN IT BE FITTED? 440 C2 = C1 + 1:RETURN FOR I = 1 TO LEN (W\$(W1)) 450 ON D(D) GOSUB 1090,1100,1110,1120,1140,1150,1160,1170 REM**OFF THE EDGE? C2 = C1 - 1: RETURN 1120 460 REM . NOW THE DIAGONALS 1130 R2 = R1 + 1:C2 = C1 + 1:RETURN IF R2>15 OR R2<1 OR C2>12 OR C2<1 THEN 580 1140 480 R2 = R1 + 1:C2 = C1 - 1:RETURN 1150 S\$ = MID\$(W\$(S1),1,1) 490 R2 = R1 - 1:C2 = C2 + 1:RETURN R2 = R1 - 1:C2 = C2 - 1:RETURN REM**WORDLENGTH SORT IF S\$(R2,C2) < > ""AND S\$(R2,C2) < > S\$ THEN 580 R1 = R2:C1 = C2:R2(I) = R2:C2(I) = C2 1160 500 510 1180 520 REM ** OK WE HAVE A WORDFIT SO PUT IT IN THE ARRAY 1190 530 FOR W1 = 1 TO W - 1 IF LEN (W\$(W1)) < LEN(W\$(W1 + 1)) THEN S\$ = W\$(W1):W\$(W1) = W\$(W1 + 1): W\$(W1 + 1) = S\$:S = 1 1200 FOR I = 1 TO LEN(W\$(W1)) $S_{(R2(I),C+(I))} = MID_{(W_{(W_{I}),I,1)}}$ 550 560 NEXTI 1220 NEXT GOTO 700 IF S = 1 THEN 1190 RETURN 570 1230 580 REM . MUST HAVE FAILED TO FIND FIT SO TRY ELSWHERE 1240 590 REM PRINTER CHECK TO PREVENT SYSTEM HANG 1250 600 PRINT@609,"HARD!", IF PEEK(14312) < = 127 THEN RETURN 1260 PRINT"PRINTER NOT READY!! PRESS 'P' WHEN THE PRINTER IS 610 PRINT@600, CHR\$(30); READY OR 'S' TO START AGAIN' Q\$ = INKEY\$:IF Q\$ = "" THEN 1280 IF Q\$ = "S" THEN RUN IF PEEK(14312) < = 127 THEN 1270 IF Q\$ = "P" THEN CLS:RETURN 630 REM TO GET HERE MUST HAVE FAILED FOR ENTIRE ARRAY 640 CLS:PRINT"SORRY, I CANT COPE WITH "; W\$(W1);" ', DO YOU 650 WANT TO START PRINT"AGAIN (PRESS'S') OR PRINT OUT THE PARTLY DONE 660 1320 GOTO 1280 WORDSQUARE ANYWAY (PRESS 'P')'

PICK YOUR PERIPHERALS CAREFULLY

Can you be SURE of getting unbiased advice about what you really need? We stock a range of products including:

COMPUTERS:

IMS International **Exidy Sorcerer**

TERMINALS:

IMS International Televideo Soroc Visual Technology

PRINTERS.

Datasouth NEC Qume Impact Data MPI — New 88G (Graphics) Malibu - New 200 Centronics (new 737) IDS — Paper Tiger Texas Instruments Howard — Olivetti

SOFTWARE:

Micropro: Wordstar, Supersort, Datastar. Digital Research: MP/M, CP/M, MVT, EFamos & Basic. Davidson Accounting Packages, Australian designed and produced. Microsoft: Fortran-80, Cobol-80, Basic-80.

S-100 SPECIAL BOARDS:

Calendar Clock Microangelo Graphics Boards

Dealer and OEM discounts available where appropriate, CAN YOU AFFORD NOT TO CHECK WITH US???

CROCOMPUTER PRO

GPO BOX 72 SYDNEY 2001 92 PITT ST SYDNEY (02) 2314091 232 6804 Melbourne (03) 26-5522. Brisbane (07) 52-8455. Hobart (002) 28-6288.

INTRODUCING

ELLGUARD

WORD

S100 MULTIUSER SYSTEMS

Microtrix continues to present state-of-the-art microcomputer products. Our extremely popular single-user system can now be easily expanded to cater for two, or up to five, users.

This has been made possible by a new intelligent multiuser input/ output board. Known as the MPC-4, it provides four serial I/O channels with individual baud rate selection, and an input and output buffer for each port. Data transfers are efficiently handled by interrupt driven techniques.

An on-board Z-80 Microprocessor controls the functions of the MPC-4, freeing the main CPU to complete other tasks. This creates a more efficient and higher performance system.

But that's not all! The hardware is backed up by a sophisticated multiuser operating system: COSMOS. CP/M compatibility is maintained, but file protection is greatly enhanced. Both global and local files are supported. An editor, Z-80 assembler, linker, loader, CBASIC 2, and a full set of utility programs are provided. These, together with a time-of-day clock, make the system appear like more expensive minicomputers. And COSMOS will also support a hard disc when required.

The MPC-4 and COSMOS are available separately, or complete systems can be configured to suit your requirements. So, for the latest in microcomputer technology, contact us now.

DEALERS REQUIRED AUSTRALIA-WIDE

SYSTEM PRODUCTS

Versafloppy 2 Double density controller	\$400 kit \$425 kit \$360 kit \$600 kit \$450 kit \$245 kit	\$470 A/T \$485 A/T \$420 A/T \$660 A/T \$520 A/T \$295 A/T	
---	--	--	--



MICROTRIX

PO Box 158, Hurstbridge, Victoria 3099 Phone (03) 718-2581

A complete catalogue of all our products is available for the asking. Please add 15 percent sales tax to the above figures if applicable. Postage on any single board is \$3.



who else but CK SMITH



Ideal for use with System 80, TRS 80, Sorcerer & other computers

Up until now you would expect to pay around \$1,000 for a dot matrix printer. We've changed all that with the release of this compact 80 column tractor-feed impact printer.

If you're into computers, then this is the printer for you!

look at these features:

- Full 80-column printing
- Tractor-feed as standard Printing at 30 characters/second
- High-resolution graphics printing
- Standard Centronics-type parallel interface Compact size: only 328 x 171 x 127mm



NB: Wrong catalogue No. and price shown for this item in our 1981/82 catalogue.

Fan Form Paper

2,000 sheets continuous fan form paper to suit printer

Cat. X-3254 \$27.50

Optional cable required for connection of printer to computer. Type depends on computer. BE EARLY — WE EXPECT DEMAND

NSW: 145 Parramatta Rd AUBURN 648 0558. 613 Princes Hwy BLAKEHURST 546 7744: 818 George St BROADWA' 211 3777: 531 Pittwater Rd BROOKVALE 93 0441; 147 Hume Hwy CHULLORA 642 8922. 162 Pacific Hwy GORI HILL 439 5311: 30 Grose St PARRAMATTA 683 1133; 125 York St SYDNEY 290 3377. 263 Keira SHULLORGONG 28 3800; ACT: 96 Gladstone St FYSHWICK 80 4944; 010 166 Logan Rd BURANDA 391 6233; 84 WOLLONGONG 28 3800; ACT: 96 Gladstone St FYSHWICK 80 4944; 010 166 Logan Rd BURANDA 391 6233; 84 WOLLONGONG 28 3800; ACT: 96 Gladstone St FYSHWICK 80 4944; 010 166 Logan Rd BURANDA 391 6233; 84 WOLLONGONG 28 3800; ACT: 96 Gladstone St FYSHWICK 80 4944; 010 166 Logan Rd BURANDA 391 6233; 84 WOLLONGONG 28 3800; ACT: 96 Gladstone St FYSHWICK 80 4944; 010 166 Logan Rd BURANDA 51 6255; 84 GORI MICHAEL ST 196 LOGAN 18 391 LOGAN 1 ific Hwy GORE 263 Keira St

Mail Order Centre: PO Box 321, North Ryde, NSW 2113, Ph. (02) 888 3200



the name tot value. in computate and

PET Talk — double density

Paul Williams

Double the plotting capacity of PET with this routine.

THE FOLLOWING simple program listing allows plotting of characters on an 80 by 50 grid on the PET screen, thus enabling more precise graphs and pictures to be drawn. The first two lines of the program (lines 1 and 2) should be included at the beginning of the program that is to use the doubledensity feature; they initialise the two arrays required. The plotting section (the last two lines) can be called by a GOSUB 1000 during the program run, after an x and y value has been specified. The x value should be between -39 and 39, and the y value between -24and 24.

Where to go

Assigning 0 to both x and y will produce a dot in the centre of the screen: -39 for x and 24 for y will produce a dot in the top left-hand position of the screen, and

39 for x and -24 for y will be in the bottom right-hand corner of the screen. Thus the positions radiate as for a normal graph from the centre of the screen.

The program works by arranging the codes for the sixteen different doubledensity graphics in such a way that if the position of the code already on the screen is ORed in binary with the position in the array of the code that you want to put on the screen, the resulting position will give the code containing both the characters that you want to plot. Array S contains the list of all sixteen codes, and array T is used for decoding the PEEK code from the screen into a position for use with array S. This method is best explained by looking at the array S. Table 1 shows the contents in graphical form.

For example, if the character was

on the screen, and the character wanted to be added, the position of the first character, 0 0 0 1, is ORed with the position of the second character, 0 1 1 0; the result obtained is 0 1 1 1, which, in the table, is the character , which is the one required to POKE on to the screen. Line 1010 of the subroutine does this, as well as calculating which character needs to be added to the screen.

- DIM S(15),T(255):FOR T=0 TO15:READ S(T): T(S(T))=T:NEXT T:T=0
- 2 DATA 32,123,126,97,108,98, 127,252,124,255,226,236,225, 254,251,160
- 1000 S=33267+(X/2)-INT(Y/2)*40 1010 POKE S,S(T(PEEK(S)) OR (2\(\(\lambda\)((X/2-INT(X/2))*4+ ((Y/2-INT(Y/2))*2)\(\(\lambda\)2))):

POSITION IN ARRAY	BINARY POSITION	DECODED CHARACTER			
0	0000	SPACE	8	1000	SHIFTED <
1	0001	SHIFTED;	9	1001	RVS SHIFTED ?
2	0010	SHIFTED>	.10	1010	RVS SHIFTED "
3	0011	SHIFTED!	11	1011	RVS SHIFTED ,
4	0100	SHIFTED,	12	1100	RVS SHIFTED !
	0101	SHIFTED "	13	1101	RVS SHIFTED >
6	0110	SHIFTED ?	14	1110	RVS SHIFTED ;
	0111	RVS SHIFTED <	15 DMAGS Ltd	1111	RVS SPACE .
Table 1. Ti double de	ne block graphics nsity effect.	characters and their binary and character	r key designation	ons for producing the	

Commodore Computer Users...

Put this on your reading list.

The new Commodore computer magazine is out now.

Prepared specially for Australia, there are up-to-the minute details on

Commodore hardware.

Reviews on Software.

New product releases.

Programming

information and service tips.

RAM and

ROM maps for all

Commodore computers.

Plus much more.



And put this in the mail.

If you send us this coupon with a cheque or money order for \$30 (your annual subscription for 8 copies) you'll be saving 25% on the normal cost of Commodore Magazine

Yes I'd love to save \$10 on my subscription to Commodore Magazine. Enclosed is my full payment of \$30:

NAME.

ADDRESS.

commodore

Commodore Magazine. PO Box 336, Artarmon NSW 2064.



Until now, building your own computer could cost you around \$600 — and still leave you with only a bare board for your trouble. The Sinclair ZX80 changes all that. For just \$295 you get everything you need including leads for direct connection to your own cassette recorder and television. The ZX80 really is a complete, powerful full-facility computer matching or surpassing other personal computers costing much more. The ZX80 is programmed in BASIC and you could use it for anything from chess to running a power station.

Two unique and valuable components of the Sinclair ZX80: the Sinclair BASIC interpreter and the Sinclair teach-yourself BASIC manual. The unique Sinclair BASIC interpreter: offers remarkable programming advantages — unique 'one touch' key word entry. The ZX80 eliminates a great deal of tiresome typing, Key words (RUN, PRINT, LIST etc) have their own


single key entry. Unique syntax check. Only lines with correct syntax are accepted into programs. A cursor identifies errors immediately, preventing entry of long and complicated programs with faults only to discover them when you run.

Excellent string handling capability — takes up to 26 string variables of any length. All strings can undergo all rational tests (e.g. comparison). The ZX80 also has string input to request a line of text; strings do not need to be dimensioned. Up to 26 single dimension arrays. FOR/NEXT loops nested up to 26. Variable names of any length. BASIC language also handles full Boolean arithmatic, conditional expressions, etc.

Exceptionally powerful edit facilities, allows modification of existing program lines. Randomise function, useful for games and secret codes. Timer under program control. PEEK and

POKE enable entry of machine code instructions, USR causes jump to a user's machine language sub-routine. High resolution graphics with 22 standard graphic symbols. The Sinclair teach-yourself-BASIC manual 96 page book free with every kit.

Fewer chips, compact design, volume production means MORE POWER FOR YOUR DOLLAR! The ZX80 owes its low price to its remarkable design; the whole system is packed onto fewer, newer more powerful and advanced LSI chips. A single SUPER ROM, for instance, contains the BASIC interpreter, the character set, operating system and monitor. And the ZX80's IK byte RAM is roughly equivalent to 4K bytes in a conventional computer because the ZX80's brilliant design packs the RAM so much more tightly. (Key words occupy just a single byte). You can add to the memory via the expansion port, giving a maximum potential of 16K.

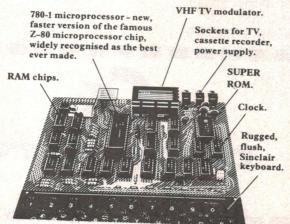

Quantity	R FORM: SINCLAIR EQUIPMENT 308 High St., Kew 3101,	Vic. Tel. 861 6224	
	Ready-assembled Sinclair ZX80 Personal Computer(s).	Item Price	Total
eti (i.c.)	Price incl. ZX80 BASIC manual, excl. mains adaptor.	\$295.00	
	Mains Adaptor(s) (600Ma at 9V DC nominal unregulated).	\$ 16.00	
	16K Memory Expansion Board	\$150.00	
	Sinclair ZX80 Manual(s) free with every ZX80 computer.	\$ 15.00	
I enclose c	heque/Bankcard/ Diners Club/Amex	TOTAL	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2

More POKEing on your ZX80

M.E. Bryant

Last month we showed you the basics of using screen POKEs on your ZX80. This month we round it all off with an example program.

Graphic Example

Just for fun, here is a simple program that demonstrates the features discussed in the last article. It just fits in the 1K ZX80. The computer prints up a display consisting of black and grey squares in a pattern determined by a number input at the beginning of each series of games. The object of the game is to get the "woodworm" (an asterisk), which first appears at line 8 column 1, to eat its way across the screen to column 32 in the least number of moves. The snag is that the black squares represent a particularly tough kind of wood and each time one is eaten a penalty of 5 moves is incurred. Numerals 6, 7 or 8 are input as pseudo-cursor controls to move the insect down, up, or forwards respectively. The computer keeps track of the number of moves taken to reach column 32 and displays the total at the end of each game together with the best performance in the present series. Pressing NEWLINE after a game sets up another game in the same series. Entering a character starts a new series.

2 LET Y = 32000 4 INPUT R 8 LET P = 0 10 LET W = 0 12 LET B = 1 14 LET A = 8 16 LET Z = -1 18 LET M = 0 20 RANDOMISE R 22 FOR N = 1 TO 352 24 LET D = 9 26 LET X = RND(2) 28 IF X = 1 THEN LET D = 128 No. of moves - best so far! Seed for random number generator

Assign variables prior to PEEK and POKE

Set seed for random number generator

Print eleven lines with black and

30 PRINT CHR\$(D);

32 NEXT N 34 GOSUB 500 36 POKE W + 232, 20 38 LET Z = Z + 1 42 GOSUB 500 44 LET M = W + (A-1)*33 + B

48 IF C = 6 AND A < 11 OR C = 7 AND A>1 THEN LET A = A-2°C+13

50 IF C = 8 THEN LET B = B+1 $52 \text{ LET M} = W + (A - 1)^{*}33 + B$

54 IF PEEK(M) = 128 THEN LET Z = Z + 5

56 POKE M, 20 58 IF B = 32 THEN GOTO 62 60 GOTO 38 62 IF Z < Y THEN LET Y = Z

64 PRINT "END OF GAME IN ";Z;" MOVES"

66 PRINT "BEST SO FAR ";Y;" MOVES" 68 INPUT X\$ 70 CLS

72 IF X\$ = " " THEN GOTO 8 74 RUN 500 LET P = PEEK(16397)

510 IF P > 127 THEN LET P = P - 256 520 LET W = PEEK(16396) + P*256

530 RETURN

grey squares at random. Pattern determined by R

Locate display-file Insect in initial position Count No. of moves Which way? Locate display-file

Put a space where insect is Set A and way and make sure we don't POKE off-screen

Set M to next insect location address If there's a black square in the way, add penalty Put insect in next location Watch for end of game Next move Set Y to best so far

NEWLINE for another game Any character for another series

Subroutine for setting W to address of start of display-file

DON'T BUY A RSONAL COMPUT

until you have checked Seahorse Computer's prices on APPLE & COMMODORE systems. e.g. ● 16K APPLE'S from \$1306.95 + S.T. ● 8K COMMODORES from \$722.00 inc. tax.

• We talk to our customers

· We service what we sell We support our sales with Australia's most comprehensive Range of High Quality Software

Personal callers welcome We Mail Order all over Australia.

- Personal cheques Bankcard
- Visa Mastercharge

*APPLE, Reg. T.M. of APPLE INC., Cupertino., CA, U.S.A. COMMODORE, Reg. T.M. of COMMODORE INC., U.S.A.




SEND FOR OUR FREE COMPREHENSIVE CATALOGUE OF HARDWARE & SOFTWARE FOR: - APPLE, COMMODORE, SORCERER & TRS-80

SEAHORSE COMPUTERS

33 MITCHELL STREET, CAMDEN 2570

P.O. BOX 47 CAMDEN 2570

PHONE (046) 66 6406

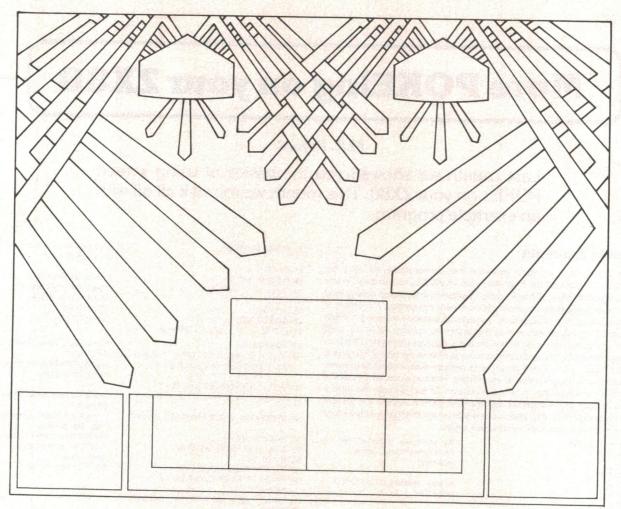

Now the Bose® 901® Series IV system. It overcomes the greatest obstacle to fine performance. Your living room.

Introducing the new Bose 901® Series IV Direct/Reflecting® speaker. With two major improvements.

There is a new equalizer with two controls that allow you to simultaneously adjust broad portions of the frequency band to compensate for acoustical differences from one living room to the next.

There is also a new driver so

advanced in materials and design that Bose has removed the power limitations for home use. Yet this speaker can still be driven with as little as ten watts per

The Bose 901°
Series IV turns
your perfect living
room into the perfect
listening room.

channel.



BOSE AUSTRALIA INC., 11 MURIEL AVENUE, RYDALMERE, NSW 2116.
TELEPHONE (02) 684-1022, 684-1255.

E1111111

Software's the key in the videodisc war

Philips might have the best system technically, Japan's VHD is moving fast and has a lot of oriental clout behind it, and RCA's Selectavision is at present the cheapest, but in the end it's the videodisc system that can provide the movies the public wants - and lots of them — that will win out in the market.

MARCH 1981 officially saw the videodisc war get under way.

been test-marketed in the US for the last eighteen months or so, under the names of both Pioneer and Magnavox, but for reasons we'll explore later haven't swept the market despite this staggering time advantage. The other two systems promised as contenders in the There is to all intents and purposes videodisc war seemed at times as if finally things are hotting up.

RCA (an American system) launched its Selectavision system on March 23 with an advertising and promotion budget US\$15 million. It will sell for US\$499 and has a library of videodiscs priced at between US\$14 and US\$27. This library falls short by 50 of the promised 150 titles, but RCA says it will introduce another 25 in May and 25 in August.

Meanwhile the JVC-developed VHD (Video High Density) system from Japan is also a reality following the opening of a videodisc manufacturing plant in Los Angeles in

RCA's Selectavision

The RCA player is priced at around US\$200 cheaper than the optical from Magnavox and players Pioneer, but lacks many of the facilities that their laser system Philips/Pioneer/ offers. The Magnavox players have freeze frame, random search system, stereo sound, frame-by-frame advance, numbered frames, a laser solid on the more controversial beam for a stylus and a disc that will never wear out. In contrast the a \$70 stylus that sits in a groove similar to a standard audio record; home market. Hedging their bets? both it and the discs will wear out.

However, RCA's system is by far the cheapest, as well as being Philips' laser-optical players have scheduled to have 200 000 players into the US market by the end of twelve months, so both Philips and VHD have been forced to buck up their ideas if they aren't to be elbowed out of the market.

Japan's VHD system

only one video system in Japan, the they'd never get off the ground, but reason being that the Japanese government 'suggested' that all Japanese manufacturers get behind one system — for obvious reasons. Pioneer has even been criticised on the government TV station NHK and in the press for not joining this 'Japan Club', but by now has too many millions tied up in the optical system to change sides now. Besides, it sees the optical system as the best and plans to support it to

The VHD groundswell was quite a surprise to the industry, but it was obviously provoked by Philips' slowness in getting its system going as well as it should and by Selectavision's relative shortcomings. Matsushita announced about a year ago that it planned to back this third system, developed by its subsidiary JVC, and sure enough at the 1980 Tokyo Electronics Show not only Matsushita but nearly every major Japanese manufacturer was showing prototypes of the VHD videodisc, Pioneer and Sony being the only notable exceptions.

The Japan Club is slightly less however; international scene. Toshiba and Sanyo were proposing Selectavision system has only to make optical players for Europe, mono sound, straight play, and uses RCA Selectavision players for the US, as well as VHD players for the

The VHD club, consisting of Mat-



Blockbuster movies — like The Wild Geese, starring Richard Burten (scene above) - on software will sell videodisc systems.

sushita (National Panasonic), JVC, corner of the video war ring. In fact General Electric and Thorn/EMI, they've been out there sparring for a plans to press discs for the movie while now, but it wasn't till the comcompanies and let them market the petition made serious moves that product themselves. This will save the electronics companies millions on in earnest. in royalties and will also assure the movie companies of maximum and the sudden groundswell toprofits from the movie rights which may well make them more and Philips have finally started a true willing to release movies for video- push into the US market. Pioneer disc. The discs will be distributed by started shipping in big lots last the movie companies in the same way as record companies distribute over 100 000 machines into the US their own audio discs.

opened in Los Angeles, will press the discs for the movie companies October should have 60% of the US for between US\$5.50 and US\$6.50 market covered, geographically each, with a minimum production speaking. So Philips may still have a run of 3000. According to Gary chance to head off both VHD and Dartall, who heads both VHD RCA — as long as they get their Programs and VHD Disc Manu- software — i.e: disc — problems facturing, approximately 200 titles will be available in substantial the US later this year.

access search system with an add- videodisc marketing plans. on component, and not actually surface wear.

Philips' laser system

developed by Philips is in the third UK to make the discs using an as yet

they seemed to realise the war was

Panicked by RCA's cheapness wards Japan's VHD system, Pioneer October and plans to have placed market by October this year. Philips' The VHD Manufacturing Co., just US subsidiary Magnavox has also increased production and by sorted out.

Philips has negotiated to buy quantities when the VHD player hits Sylvania and Philco, which are leading TV manufacturers. If The VHD system falls about mid-successful, it will give Philips 10% of way between Philips and RCA in the the TV market in the US and a forfeatures it offers, having a random midable back-up to its optical

Meanwhile, back in Europe touching the record so there's no Philips is making sure that the optical disc player is the chosen PAL standard. It has built a hardware factory in Belgium to produce laser videodisc system players and a software factory in the

news

undisclosed photographic process.

The Philips videodisc will be launched in the UK this year on a test market basis, and since it is the first PAL videodisc system it is of vital interest to Australia. We will inevitably source our software from the UK because we have the PAL TV system, while Japan and America have the NTSC colour system.

So the battleground is drawn up. RCA offers a cheap and cheerful player, Pioneer and Philips a sophisticated laser system they argue is the only way to go in the future, and VHD has its system which is a cross between the two. Since the ultimate winner will be the one which offers not superb technical performance nor a cheap price, but rather the largest selection good, up-to-date, popular movies, it has to be the software which decides the outcome of the war.

The disc situation

Lack of software - discs - lies behind Philips not having swept the videodisc market despite having over a year's lead on the Selectavision and VHD systems.

When MCA Universal and Pioneer Electronics got together a few years ago it looked like the perfect marriage. Pioneer's job was to refine the laser disc player originally developed by Philips, while MCA, which has around a 50% share of the US entertainment scene, was to develop the software and provide the library — a European system, with hardware built by a Japanese company and software manufactured and provided by an American company.

Towards the end of 1979 it became obvious that all wasn't rosy. With Philips not taking an active part in the software side of the business, MCA was not producing enough titles or solving production problems of the optical videodisc. Both RCA and Matsushita executives cite these disc problems as the reason for their going ahead with their rival systems. MCA sold 50% of its share in the Universal Pioneer company, without explanation, to IBM. This gave Pioneer 50%, MCA Universal 25%, and IBM 25%.

Pioneer and Philips, impatient with the snail-like pace MCA was proceeding at with the software, formed their own company called Optical Programme Associates

actively pursue the necessary software for the laser system. Pioneer has also built a disc factory in Japan.

While the new 'photographic process' by which optical system discs are made hasn't yet been revealed by Pioneer or Philips, it's obviously a very different and newer process than that for both RCA and VHD discs, which can be pressed in a factory in a similar fashion to audio discs. However, both these rival discs have to be handled very carefully. The disc in both systems comes in a 'caddie' (like a record sleeve). The caddie with the disc inside it is pushed through a slot in the front of the player, then the disc settled into the player and the caddie removed from the slot. The reverse procedure has to be gone through to remove the disc. It must therefore be practically untouched by hand, whereas the laser system disc can be thrown across the room and jumped on without damaging it.

However, even if Pioneer's new factory and Philips' new photographic process have finally ironed out problems in disc production, it'll all be academic if they can't come up with good movies and up-to-date pop concerts to go on them. MCA Universal has a vast library of movies, but for some reason hasn't been making them readily available on laser discs; there are only 200 titles available in this system after 18 months in the marketplace.

The industry calls this the 'soft software' problem, but basically they mean movies. It's movies that will sell a system; no matter how good technically or how cheap a system may be, if the public can't get the range of movies and entertainment they want to go with it, they won't be buying that system.

What about Australia?

There is one sane thought for Australians in this complex international punch-up. The various manufacturers are going to be so busy fighting each other in the lucrative US and Japanese markets that they probably won't give us a

The odds are that Philips will establish a PAL optical system in Europe and that is what we will eventually get. By the time they get round to launching it here, either late this year or early 1982, the market patterns elsewhere will probably be established - and (with MCA (Iniversal and IBM) to there will already be a good supply

of movies available! The only threat disc players has subsidised the cost to Philips on the PAL front is EMI-Thorn, who are backing the VHD system.

Pioneer has started the ball rolling in Australia by selling 300 players to GMH dealers around the country, an idea based on the American General Motors deal in which Pioneer Electronics supplied some 13 000 industrial videodisc players to dealers around the US for promotion of new car models and staff training. (See box on page 133.)

There's more to this than just expanding the videodisc market into business. Managing Director of Pioneer Electronics Australia, Les Black, says that selling 300 video-

of setting up a service department for videodisc players in readiness for their launch in Australia. Not bad?

But don't get too excited. He also says that he has to give Japan six months' notice for stock in the PAL format - and he won't do this until he is sure there will be software to support it

So, unless EMI-Thorn get their PAL system off the ground in time to be serious competitors, it looks as if it's all eyes on Philips in Europe for the videodisc system that will take over the market in Australia though we might have to wait a while yet to see it happen.

Dennis Lingane

Fast videotape copier

In the past, duplication of video tapes has had to be carried out in real time, so that a two-hour tape would take two hours to duplicate. This is one reason why there is such great interest in videodiscs, which can be produced easily in large numbers.


The helical scanning format used magnetic flux generator. The audio tape duplication. However, a prototype high speed VHS copier which can duplicate a three-hour tape in just three minutes.

system are shown in the diagram. maximum audio quality. The whole The high coercivity master tape is wound in close contact with the automatic operation. blank tape and both are exposed to a magnetic field produced by the

in video tape systems prevents high method of duplication is based on speed copying, as is done with the bifilar printing system for the video signal, the master tape's Matsushita have now demonstrated image being copied on to the blank tape.

However, the audio signal is transferred quite separately to the The essentials of the Matsushita blank tape in order to achieve machine has been designed for

Brian Dance

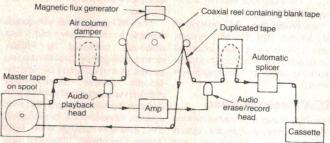

The basis of the Matsushita fast bifilar video tape duplicator.

Hitachi metal

Hitachi are currently introducing metal tapes in two new lengths as their ME46 (46 minutes' recording time) and as their ME60 (60 minutes' recording time).

The pure metallic particles in special process which coats each dioxide tapes, Hitachi say. particle with a special anti-oxidant

so as to produce greatly increased particle stability.

It is claimed that the use of these tapes enables the maximum output level to be increased by 2 dB at the lower and mid-frequency ranges when compared with high quality chromium dioxide tapes. In the upper frequency range the maximum output level is 8 dB higher these tapes have been treated by a than that obtainable with chromium

Brian Dance



Hitachi's latest VHS Recorder

Following the introduction of their VT 8000 VHS video recorder, Hitachi are now adding the VT 8500 to their range; this incorporates a sophisticated microprocessor in its circuitry.

directly or by means of an infrared flashing warning LED indicator less than twelve different modes to until the condensation be selected from the comfort of evaporated. one's armchair.

five times the normal speed.

generator in the VT 8500 which en- employed to prevent this. ables the video channel of the television receiver to be accurately the VT 8000, but is one of the tuned in by using the black and lightest mains-powered units on the white test pattern instead of having market, with a weight of about to play back a pre-recorded tape. In 12 kg. order to avoid damage to video

The microprocessor enables five tapes from moisture accumulating programmes to be recorded over a during wide temperature changes, a seven-day period either on the same dew detector circuit has been inor different channels. The principle corporated into the recorder, which controls are touch operated using detects the presence of moisture on integrated circuit logic either the tape head and switches on a control key pad which enables no apart from disabling the recorder

A timer back-up circuit is incor-The available modes include porated into the VT 8500 so that if double speed playback, slow the power should fail for a short motion playback, freeze and ad- time, the instructions coded into the vance frame, rewind/fast forward, memory of the equipment will not play, record, change channel and a be lost from the memory. In the facility which enables the user to record mode, users cannot accilocate quickly any section of the dentally switch the recorder over to tape by speeding up the playback to a different channel whilst another channel is being watched, since an Hitachi have included a test signal automatic channel-locking circuit is

The VT 8500 is similar in style to

Brian Dance

New series TDK reel-to-reel tapes

In response to demands by professional, semi-professional, and home open-reel tape recordists for higher quality tape products, TDK (Australia) Pty Ltd have introduced two new lines of quarterinch (6.25 mm) open reel audio tapes.

Mastering Series and TDK LX Pro- 3 kHz, high frequency sensitivity of fessional Studio Series, both lines +6 dB at 20 kHz, bias noise level of represent significant breakthroughs -57 dB and tape distortion level of in open reel magnetic tape tech- 1.3%. nology, TDK say.

cifically for studio master use in live in running times from 60 to 180 music mastering, and is, according minutes (at 19 cm/sec.) and in to the corporation, the finest newly designed super precision 10" market.

in professional broadcast record- perfect circularity and high strength. ings and for semi-professionals Of the GX series, only the 1800 ft manding recording applications.

at 400 Hz), low frequency sensitivity \$18.29. +1.5 dB at 400 Hz, mid-

Designated TDK GX Studio frequency sensitivity of +2 dB at

The LX series is available in The GX series is designed spe-lengths from 1200 ft to 3600 ft and quarter-inch open reel tape on the metal reels and 7" plastic reels. The reels each consist of a separately The LX series is designed for use moulded hub and flange to ensure

seeking higher quality performance length, 90 minute running time, is from an open reel tape to meet de- available in Australia at this stage. The GX and LX series supersede the The GX series features TDK's old series S, L, and LB which are no newly developed ultra-fine gamma longer available. Both lines feature a ferric oxide particle tape formulation dust-proof cleaning leader tape with with extremely high output and low a timing cue. Recommended retail distortion throughout an extended prices for the GX and LX series are: LX 35 90 \$12.30, LX 35 180M TDK claim the GX Studio Master- \$34.49, LX 35 90B \$13.52, LX 35 ing Series has a maximum output 180BM \$38.16, LX 50 60B \$12.30, level (MOL) of +14 dB (measured LX 50 120BM \$34.49, GX 35 90B



Sanyo announces new Beta video cassette recorders

Sanyo Australia recently announced two new Beta format products to complement the continuing success of their VTC9300PN video cassette recorder.

portable video cassette recorder, VCR, featuring microprocessor which was launched on the Aus- system and infrared remote control. tralian market in March this year.

in June by the release of Sanyo's tralia's long-term commitment to

First will be the Sanyo VTC 3000P second-generation Beta format

Introduction of these The portable VCR will be followed products consolidates Sanyo Aus-

equipment, and the enlarged video manded by the Australian market.

recently announced plans to manu- claims to be the leading supplier of facture VHS format VCRs in addition microwave ovens. to the well-established Beta system. This move is designed to increase contact Mike Hart, Australian Sales Sanyo's VCR market share in America, the UK and Europe.

the Beta format in video tape facture RCA, VHD and Philips videodisc systems, Sanyo aims to product range is designed to cater become the world's leading supplier for all popular price points de- of domestic video equipment. Sanyo already supplies one-third of On the world scene Sanyo Japan the world's tape recorders and

For further information please Manager, Sanyo Australia Pty Ltd, 225 Miller Street, North Sydney With the recent decision to manu- NSW 2060. (02)436-1122.

"Instant" purebreds just don't exist.

A good-looking component stereo system can be launched overnight. But an excellent-sounding system that will delight audiophiles is another matter. Excellent results require that each individual unit be outstanding. That takes experience and special skills beyond mere technology. It takes the hi-fi expertise of Sansui, the audio specialist with decades of dedication to 1st class reproduction.

SUPER COMPO systems weren't created overnight. From the very beginning, each unit was conceived with the other units in mind. The result is matching that goes beyond handsome styling. Or mere "power" matching. SUPER COMPO systems are distinguished by "in-depth matching." This means that certain priorities such as extremely low dynamic distortion were followed throughout.

An added feature of SUPER COMPO is the incorporation of the latest advances in electronics. The dual benefits are greater accuracy and increased operating ease. Typical refinements include computerized track sequence selection turntables, quartz-PLL digital synthesizer tuner with 12 pre-set station selection and LED station centering, full logic cassette deck with versatile auto functions, DC-servo amplifiers with auto volume adjust and LED peak power level meters. And more.

An enormous amount of care went into SUPER COMPO "in-depth" matched systems. They are the purebreds on today's market. They are for discriminating listeners who



SANSUI ELECTRIC CO., LTD. 14-1 Izumi 2-chome, Suginami-ku, Tokyo 168 Japan VANFI (AUST.) PTY. LTD. 297 City Road, South Melbourne, Victoria 3205, Australia Tel: 690-6200 283 Alfred Street, North Sydney, N.S.W. 2060, Australia Tel: 929-0293

HOW TO TELL ADVENT SPEAKERS FROM AVERYBODY



Graphs of frequency ranges are all well and good, but the ultimate test of Advent's superiority lies with you.

Listen to an Advent speaker pair.

And listen to the unstrained clarity of the system which is due to the excellent power response at high frequencies, and the simplicity and lack of unwanted interaction between drivers in Advent's

two-way design.

Listen to Advent's low frequency capabilities which are the usable equal of any speaker's. For example, Advent will reproduce the 30 HZ organ pedal note that begins Richard Strauss's "Also Sprach Zarathustra" as room-shakingly as one could ask, providing, as the case of London CS-6609, the note is actually present on the record.

For more information phone Chadwick today on (02) 647 1103.



Eti/5/81

une your sound

Numark EQ-2300

PROFESSIONAL HI-FI GRAPHIC EQUALIZER

The NUMARK FREQUENCY EQUALIZER MODEL EQ-2300 is a sound studio control unit incorporating the most advanced integrated circuits and precision components in its design.

SPECIFICATIONS

Frequency Response — 10 to 30,000Hz — 1dB (flat


setting).

Inter Modulation Distortion — At 2 Volt output 0.05 percent less than 0.05 percent output at 2 Volt. Hum and Noise — Shorted input — 80dB below 2 Volt output better than -80dB Shorted input below 2V

Output Level — Maximum 8 Volts.

Overload Indicator — Lighting up at 5 Volt output. Headphone Monitor — Low impedance position for 8 to 35 Ohm headphone.

R.R.P. \$175.00

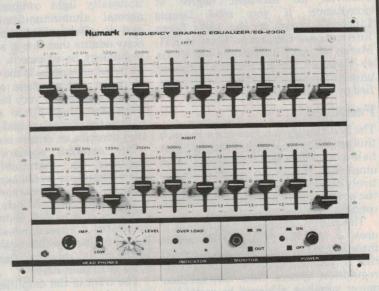

Freedman Electronics

91a Liverpool Road, Summer Hill, NSW 2130. Phone (02) 797-9941.

review

Sony TA-F80 amplifier superb technical performance and quality sound

Louis Challis didn't care much for the look of the Sony TA-F80 amplifier, but in every other way he has nothing but praise for it.

THE SONY TA-F80 pulse-locked power supply integrated stereo amplifier is an example of a new breed of amplifier which exhibits features and performance which the average user has heard about in technical articles but not yet seen presented as a commercial article. The unit we received for reviewing is one of the first examples of this amplifier to hit the Australian market, but by the time this review comes to print you will most probably be able to purchase one in your local hi-fi shop or showroom.

In Japan this type of amplifier is readily available and has already achieved an excellent degree of acceptance; if you read Dennis Lingane's report on the 1980 Tokyo International Electronics Show in ETI, March '81, you'll understand why this is so. However, it's not just the Japanese passion for gimmickry that will be satisfied by this amplifier.

Features

The first thing you notice when you pick this amplifier up is that it weighs about half as much as any comparably rated amplifier. This is the result of an entirely different approach to the design of the power supply and also the heatsink used for the power output stage.

The power supply is novel in that it uses a 20 kHz pulse-locked circuit incorporated in a neat diecast screened can. It uses a different rectification and regulation system from conventional power supplies, achieved by rectifying recessed bezel right across the top with the ac at the input to produce a nominal dc voltage. This dc voltage is then converted to a 20 kHz square wave, which is controlled by a feedback circuit in

The output of the unit is rectified again and filtered by two pairs of chokes and two pairs of capacitors to produce a positive and negative voltage at 51 volts.

Because of the very high frequency involved, there are no audible components produced and, more importantly, the filter capacitors are so small that isolation between the two channels is primarily designed for crosstalk requirements.

Not content with this, the Japanese designers have designed an output stage based on the use of a liquid/vapour phase heatsink radiator system. This is unusually light compared with the normal aluminium-finned heatsink, and it offers remarkable efficiency. Sony admits that this is a NASA space technology development, and say that its major advantage is the enhancement of power output stage cooling. They have incorporated very high frequency transistors (high-Ft) to reduce intermodulation distortion and provide what they describe as 'crisper sound'.

The external appearance of the amplifier is regrettably not attractive as one would expect from the technical features incorporated within. Unlike other Sony products, which have achieved a standard of neatness and associated attractiveness ledged by most people in the trade and by the public, this amplifier looks much more 1970 than 1980.


The front of the amplifier features a a red plastic insert. Behind this are located two arrays with 20 lightemitting diodes in each array. These indicate the peak power into eight ohms order to achieve correct load regulation. and are accompanied by engraving on


Louis A Challis

the plastic bezel of nine sets of power indications ranging between .01 and 130 watts. The bottom light in each array is continually illuminated and indicates that the power is on.

Underneath the bezel on the left is a rotary knob for turning the power on and off. There is a 4-second delay before the amplifier actually switches itself on, during which time the pulse-locked power supply comes into operation and


Measured performance of Sony TA-F80





Transient overload recovery test (IHF-A-202) 1 ms/div.

10 dB overload re rated power into 8 ohms - both channels driven. Overload duration: 20 ms; repetition rate: 512 ms.

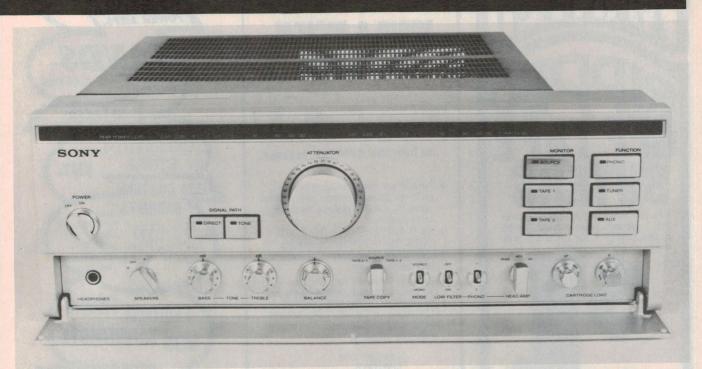

charges up the filter capacitors.

In the middle of the escutcheon is a large attenuator calibrated in dB re maximum output with typical 1 dB steps to -6 dB, 1.5 steps to -18 dB, 2 dB steps to -40 dB and 10 dB steps from -50 to -70 dB.

To the left of this volume control are two switches which allow the signal path to be switched direct or through the tone controls; each of these switches is illuminated by means of a LED inset into its face, which indicates which path has been selected.

On the extreme right hand side are six switches, also incorporating LEDs, three indicating what is being monitored (source, tape 1 or tape 2) and three for function (phono, tuner and auxiliary).

All along the bottom of the escutcheon is a hinged flap which is normally closed, behind which are the minor controls including a headphone socket and a speaker selector socket for A, B and off. I like this feature, as it helps to provide an uncluttered front panel appearance.

Behind this flap on the right are bass and treble tone controls, a balance control with a sensible central indent, a tape-copying function switch with positions of source, tape 2 to tape 1, and tape 1 to tape 2. To the right of these controls toggle switches are provided for stereo/mono, low filter on and off, phono 1 or phono 2.


The next control is a rotary switch to activate the head amp for moving coil cartridge, with positions for impedances

of three ohms, 40 ohms and a pass position if it is not required. The final two switches provide the cartridge loading facilities, with switch-selectable input capacitors of 100, 130, 200, 300 and 400 pF and input impedances of 100k, 50k, 20k and 100 ohms.

The rear of the amplifier is rather different from other units in that the rear panel only features four pairs of screw-up terminals for two sets of speakers, and one switched and two unswitched ac outlets for parallel-pin mains plugs. (This feature will obviously be deleted from the normal units designed for the Australian market).

Inside the amp

The main electronic section of the amplifier is not as wide as the front

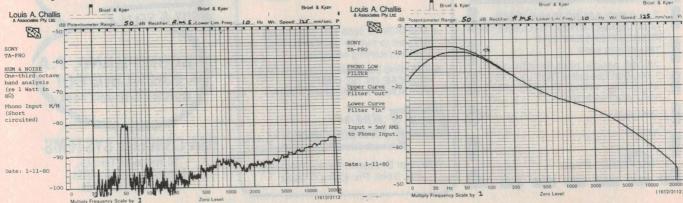





SPLICING TABS

 NORTRONICS audio care products are designed to care for and maintain your valuable recording equipment.

 SEND TWO 22c STAMPS FOR OUR FREE BROCHURE ON THE COMPLETE NORTRONICS ACCESSORIES RANGE.

EMAC E.I. INDUSTRIES Pty.Ltd.

2 Bengal Crescent, Mount Waverley. Vic. 3149. Ph: (03) 277-9989.

ONE STOP

PROFESSIONAL SOUND EQUIPMENT OPEN SAT. 10-1

POWER AMPS

WAY X-OVERS

SPEAKERS IN STOCK!

CELESTION ETONE

IBL

DSA CUSTON CABINETS



range of P.A. & Inst. Cabinets available! W's 4560's cases etc

LIGHTING

QLD AGENCY BARRETTS

PAR CANS TRUSSES TREES SPOTS DIMMERS CHASERS ETC

HARDWARE

HIRE SALES

SESSION CATCHES. PLUGS CANNONS, FANS, X-OVERS JACKS. CABLE. GAFFE BOLTS, NUTS, TOOLS, ETC. ETC.

HIRE

A SOUND SYSTEM 400 WATTS - 10000 COMPLETE SET UPS Hire a gtr. or bass amp!

BUY & SELL!

SECOND HAND, P.A BACKLINE EO! **Guitars & Drums too!**

DSA CONCERT SYSTEMS

10 Heussler Terrace. Milton, Brisbane, 4064. Phone (07) 36-6755.

Mr/Mrs/Miss ..

Address

5000 review

panel and consequently an edge of the front panel extends out to the right hand side. This provides a convenient access point for making direct connections into the preamplifier stage.

The connections for all low-level signals are provided at the rear of this section by a series of coaxial sockets. The phono sockets are gold-plated and the designations for circuit connections are sensibly screen-printed on the side of the adjacent painted steel cover.


The inside of the amplifier is extremely neat, the most outstanding features being the 'pulse-locked power supply' and the liquid/vapour phase cooling heatsink. One thing very clearly noticeable is the logical layout, which minimises unnecessary wiring and 'crossed wiring' paths. One other feature is the neat circuitry and chokes in the output stage feedback path, directly connected to the unusual output power stages, and a fast relay switching system to prevent you from destroying those stages.

On test

The objective testing of the amplifier proved how outstandingly good this unit is. The frequency response with the tone controls disconnected extends from 1 Hz to beyond 100 kHz with an absolute flatness of better than +/-1 dB. With the tone controls centred and activated the frequency response is still 8 Hz to beyond 100 kHz.

The sensitivities for the moving magnet cartridge input are 250 microvolts with a 350 millivolt overload point, whilst for the moving coil cartridge input they are 12 microvolts with 17 millivolts overload point. The harmonic distortion is less than .007% at 120 W output at all frequencies and still less than .008% at the 1 W level.

The transient intermodulation distortion is very much less than 0.05%,

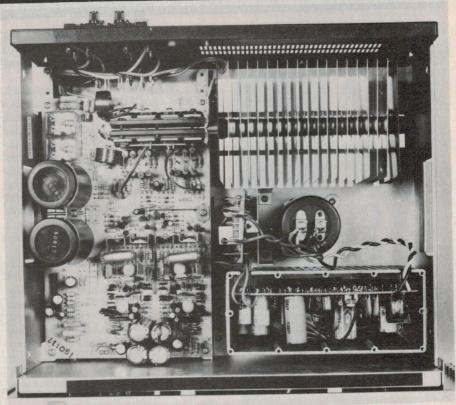

Internal view of the TA-F80. The power amplifier board runs along the left hand side, with the power output devices at the rear. The vapour-phase heat pipe and heatsink runs from the output devices to the right. The switchmode power supply is in the compartment at right front (lid off). The preamp is in its own shielded compartment at the front (not visible).

whilst the hum and noise levels are -81 dB(A) for the auxiliary, -80 dB(A) for the moving magnet input and -78 dB(A) relative to the moving coil cartridge input, with the volume control set for 1 W output. The transient overload recovery test shows an excellent but not perfect recovery response from overload clipping.

The tone controls offer a reasonable +/-9 dB boost and cut at 50 Hz and +/-9 dB boost and cut at 20 kHz.


The phono 'low filter' response can only be exhibited through the phono input and from this it can be seen that


7 dB of cut is provided at 10 Hz as a means of reducing wow components from being amplified in the main amplifier, should this prove to be a problem.

All in all the measured performance equals or exceeds the manufacturer's stated figures by a fair margin; the distortion figures are particularly good.


In use

In practical usage this amplifier is no slouch. I used it at home to play classical music in conjunction with a series of other record players and cassette players that we have recently reviewed,

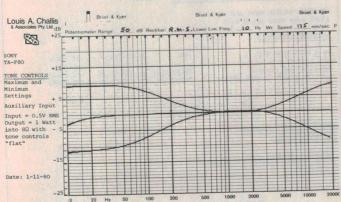

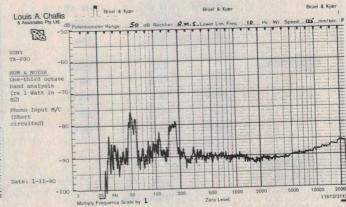

review

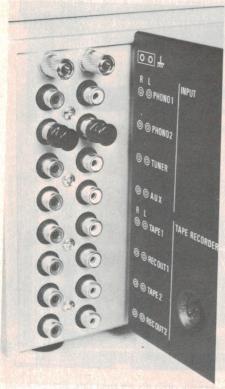

The input terminals are behind the front panel and go direct to the preamp pc board with minimum lead length.

and found its performance superlative, particularly with moving coil cartridges and no less with moving magnet cartridges.

The impedance and capacitance adjustment capabilities make it possible to trim the frequency linearity of each respective cartridge to achieve a flatter response than would be normally obtainable without protracted and messy adjustments at the input terminals. This feature alone places it in keeping with some of the more expensive and esoteric amplifiers which I have reviewed over the last year (although, I must admit, this is already an esoteric amplifier).

I played many new records both conventional and direct to disc, many of them from Sony/CBS in Japan, and they provided a degree of brilliance and natural fidelity which (with the best loudspeakers) was breathtaking. This amplifier was the main one I used in my evaluation of the B & W 801 series speakers (see ETI, Feb. 1981), and it helped to provide some of the purest and sweetest sound imaginable.

Because of the power to weight ratio of this amplifier we took it into the field to provide high-powered test signals in a number of unusual locations. With

continuous outputs of 125 W and with tone-burst testing to detect flutter echoes in auditoria, the amplifier proved that it not only has good performance, but can maintain that performance for extended periods of time even with nasty signals that would be expected to destroy its output stages and thoroughly test its protection circuitry.

I don't particularly like the appearance of the Sony TA-F80 amplifier, but I must admit I have more than just a bedgrudging respect for its technical panache and the quality of the amplified signals it produces.

SONY TA-F80 AMPLIFIER

Dimensions:

430 mm wide x 410 mm deep x 160 mm high Weight: 9.9 kg Japan by Sony Corporation Manufactured in: Price: \$1499.00 Distributed by: Sony Australia Pty Ltd 453 Kent St, Sydney.

Absolute copyright in this review accompanying measurements is owned by Electronics Today International. Under no circumstances may any review or part thereof be reprinted or incorporated in any reprint or used in any advertising or promotion without the express written agreement of the Managing Editor.

S.N. 20	1992	OF SONY TA - F8	2 自然中国的一种中国建筑	HARMONIC DISTORTION:				
FREQUENCY RESPONSE:			Tone Controls Defeated	(A) (At Rated power of into 8 Ω =	120 Watts 31 Volts)			
(-3dB re 1 Watt, O.5V Input to Aux)	Left Right	Hz to 100kHz Hz to 100kHz		Per transfer in the con-		100Hz	<u>lkHz</u>	6.3kHz
			Tone Controls Centred Left 8 Hz to > 100kHz		2nd 3rd 4th 5th	-54.1 -59.6 -96.7	-86.2 -	-85.1d -91.9d -91.2d
			Right 8 Hz to> 100kHz	。在1980年代的《中华·西班牙斯斯特》	THD	0.007	0.005	0.007%
SENSITIVITY:		Left	Right	(B) (At 1 Watt into 8 Ω)			
(for I Watt in 8 Ω)	ALX	14mV	14mV	HER THERE IS NOT THE THE		100Mz	1kHz	6.3kHz
	TUNER	14mV	14mV		2nd 3rd 4th	-83.4 -88.9	-87.3 -96.1	-85.9d
	TAPE	14mV	14mV	Marie Marie and Charles	5th	-97.0	A CARCO	-dB
	PHONO M/M	252 µ V	250 μ V		THD	0.008	0.005	-dB 0.006%
	PHOND M/C	12 uV		TRANSIENT INTERMODULATION DIST	ORTION: <	0.1%		
	OVERLOAD M/M		12 μV 350mV	(3.15kHz square wave and 15kHz sine wave mixed 4:1)				
	OVERLOAD MYC	17mV	17mV	NOISE & HLM LEVELS:				
NEXT II PRODUCE				re l Watt into 8 Ω)	ALK	-79 dB (Lin)	01 10(1)	
NPUT IMPEDANCE:		Left	Right	(with volume control			-81 dB(A)	
	ALX	50k Ω	54k Ω	set for I Watt output with,	PHONO MY	M -75.5dB (Lin) C -72 dB (Lin)	-80 db(A) -78 dB(A)	
	TUNER	50k Ω	54k Ω	0.5V input (Aux)			
	TAPE	50k Ω	54k Ω	5mV input (0.5mV input (Phono M/M) Phono M/C)			
	PHONO	46k Ω	47k Ω	MAXIMUM CUTPUT POWER AT				
	(100pf/50k Ω)		CLIPPING POINT:				
OUTPUT IMPEDANCE:	43 millio	ohms (@ lki-lz)		(IHF -A - 202) (20mS burst repeated at 500mS intervals)				
C on output line		Left 50mV				89 V P-P		
		Right 50mW			=	124 Watts		
				Dynamic Headro	om =	0.1 dB (re 120	Watte	



audio-technica

...scenario for superb sound

LATEST RELEASE! DUAL MOVING COIL PHONO CARTRIDGE

AT32



Recommended Retail \$219

If you could look through a microscope you could see the most finely polished gem quality diamond stylus, nude mount.


A precision finished square shank that gives absolutely true angle of

The AT32 Moving Coil Cartridge is of the lowest mass weight with smooth accurate trackability. The response and range is higher than most human ears can interpret

ears can interpret.

In the AT1100 arm it becomes an incomprable combination

AT1100 TONEARM



Recommended Retail \$399

AT1100 is a new low-mass tonearm with a plug-in, intergrated arm. Precision fabricated, main features include extremely low mass, immunity to resonance, and damping to reduce IM distortion and enable high trackability.

Unusual features include the intergrated tonearm which eliminates connector ring resonance and weight. All electrical contacts are gold plated. The machined aluminium head shell weighs only 3 grams, and the pipe 6.5 grams. To further reduce weight, the counterweight mass is concentrated in one small area along the tonearm axis. The extra rigid pipe is heat-hardened aluminium alloy. Computer type silver lead wires use teflon insulation for efficient transmission of high frequencies.


available at all quality hi fi dealers

If you have any supply problems however, piease contact the nearest Maurice Chapman outlet to ascertain your closest supply source.

THE MAURICE CHAPMAN GROUP PTY. LIMITED

44 Dickson Ave. Artarmon, NSW 2064. Phone (02) 438-3111 ● 150 Burwood Rd, Hawthorn, Vic. 3122. Phone (03) 818-1730 ■ Perth (09) 446-5679 ● Brisbane (07) 261-1513 ● Adelaide (08) 272-8011

PRE-STOCKTAKE SALE



TTL and CMC		4001	
7401 7405	23c	4002	250
7410	23c	4006	1 16
7410 7413		4007	310
		4012	14
7420		4014	06/
7430	23c	4014	00
7440	23c	4018	900
7441	98c	4022	1.00
7445	52c	4025	23
7446	93c	4027	45
7460	23c	4028	93
7470	37c	4029	1.33
7472	52c	4049	37
7472 7475	.36c	4049 4050	53
7480	92c	4071	23
7482	1.37	4081	23
7483	1.37	4416	48
7491	680	4449	
7492	F30	4513	
7492	700	4518	1.8
7496	/20	4520	
74121		4520	
74141	107	74C02	20



SUPA LOW PRICES ON ELECTRO'S

 1,000uf 35v.R.T.
 60c

 1,000uf 50v.R.T.
 93c

 2,500uf 16v.R.T.
 56c

 2,500uf 25v.R.T.
 64c

 3,300uf 16v.R.T.
 90c

DAVE RYALL ELECTRONICS

657 PITTWATER ROAD, DEE WHY, NSW. PH (02) 982-7500.
Mail Order PO Box 176, Dee Why, NSW 2099.

Our new Systems Technician Apprenticeship scheme is more than just an Apprenticeship.



Opportunity to work in electronics.

Tomorrow's aircraft and ground electronic systems will be highly complex, to say the least.

That's why we're looking for young, alert people interested in electronics and aircraft to be trained as Systems Technicians.

It's a highly specialised field that not only requires an analytical approach to problem solving but the potential to move into a management position very early in your

Areas of involvement include flight, propulsion, environmental, navigation, weaponry, electronic warfare, radar and

Opportunity to receive a higher than normal standard of training.

After completing your certificate of Technology/Trade Training course, you'll spend four to five years gaining practical field experience as Tradesman. Then, if selected, you'll undertake a specially designed six months RAAF Systems Technicians programme that includes developing your management and communication skills plus further specialised systems instruction. On graduation you will be a fully qualified Senior Non Commissioned Officer

Systems Technician in either the Aircraft. Avionics or Ground Electronics fields.

Opportunity for promotion.

Imagine, you could be a Commissioned Officer in your early 30's with great future prospects in the Engineer Branch of Today's space-age Air Force.

Opportunity to get valuable work experience.

These days, successfully completing an Apprenticeship doesn't automatically guarantee you a secure, well-paid job.

Opportunity to travel and make more friends.

Initially, you'll go to Laverton (Vic.) or Wagga (NSW) depending on your specialised field.

Then you could find yourself working at any one of our many bases.

Wherever you are, there'll be excellent sports and social facilities at your disposal.

Opportunity to do something for yourself now!

If you're aged between 16-21 years, have Year 11 (Year 12 preferred) education with

passes in Mathematics, Physics and English, are an Australian citizen and can meet our other entry requirements, talk to an Air Force Careers Adviser now! Alternatively, send the coupon and we'll send you the

212 1455 226 2626 82 2333 34 7077 61 3731 2 5476 Adelaide: Brisbane: Canberra: Hobart:

Newcastle:

Parramatta: 635 1511 325 6222 212 1011 Perth: Sydney: Townsville: Wollongong: 71 3191 28 6492



You're somebody in Director-General Recruiting Dept. Defence RCOT.455.FP.31.ET



Pioneer have opted for the Philips laser-read videodisc system. No doubt you would too — if model Kerry Healey made the invitation!

Videodisc — waiting in the wings

The battle lines have been drawn, the software is being sorted out and World War III (for the domestic videodisc market) appears to have commenced with test market skirmishes over the horizon. Be ready for when they strike up the Colonel Bogey march!

DISCS WERE WIDELY USED for audio recording long before magnetic tape recorders became widely available. The pattern has been completely reversed in video recording with video tapes and cassettes available whilst we still await the first commercially available videodiscs! However, the battle for the videodisc market is rapidly heating up with two systems expected to be available by late 1981 and a third system in 1982.

The videodisc market is believed to be extremely attractive and more and more manufacturers are deciding to take part in its development. Indeed, the US consultants Arthur D. Little

produced a report recently in which they forecast that, within three years, videodisc machine production should exceed that of video cassette recorders.

They expect that over half of American homes will have a video disc player by this time.


Laser-optics system

The Philips/MCA system is handled by Magnavox and Pioneer in the USA and the unit comes with a price tag of US\$750. The surface of the 300 mm (12") disc is covered with a reflective coating into which tiny pits only 600 nm wide by 100 nm in depth are burned by a laser. (For comparison, a human blood

Brian Dance

cell has a diameter of about 8000 nm!) A small helium-neon laser is used to read information from the spiral tracks of the disc on playback. Each disc has 54 000 tracks and each track contains the information for a single picture frame. The tracks are 1.6 μ m apart on a 2.5 μ m pitch, the disc rotating at 1800 rpm to provide a playing time of up to 30 minutes. However, it is possible to extend the playing time to one hour per side of the disc by adjusting the speed of rotation in proportion to the decreasing circumference, the track being read so that the laser tracks the disc at a constant linear velocity.

The Philips playback system requires

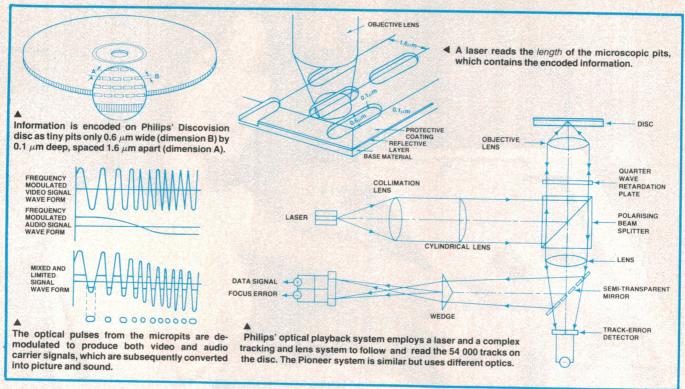

precise tracking of the laser spot beam together with servo control and time base correction to account for any warping of the disc. It is claimed that the laser modulated discs provide optimum picture resolution together with a long life, while the pits provide very high information storage density. The video blanking bandwidth can exceed 8 MHz. It seems likely that this system may offer sharper images than capacitive tracking systems.


RCA System

The RCA Selectavision system employs a metal electrode attached to the back of a diamond stylus with a $5 \mu m \times 2 \mu m$ tip. This stylus follows the track of a groove cut in a vinyl disc which is electrically conductive and utilises the capacitance variations arising from small depressions (known as 'pits') at the bottom of the groove. These changes in capacitance are employed to modulate the amplitude of a composite frequency carrier which is subsequently decoded and fed into the aerial terminals of a television receiver.

It is claimed that this capacitive stylus system offers the principal advantages of low cost and ease of manufacture. The selling price of the RCA type players has been forecast to be less than US\$500 in the world markets. This may make it the cheapest videodisc system to become available in the fairly near future, although with a launching date in the world markets of 1982 (and probably somewhat earlier in the USA), it will probably be the latest system to appear in the videodisc race.

STOP PRESS!

Philips NV of the Netherlands, which with its American partner MCA was first to market a videodisc player in the US. will also be the first to do so in Europe. The company plans to start selling a PAL version of its optical player in the UK this spring with 100 titles in its catalogue. That number will be doubled during the first year, Philips' officials insist. Meanwhile Thorn EMI Ltd, the UK champion of the video high-density capacitive grooveless disc developed by Victor Co. of Japan, will ready a plant for producing master discs from tape this year in preparation for a 1982 launch of VHD players in that country. RCA Corp, the third main competitor, also plans to have PAL and Secam versions of its Selectavision players on the market in 1982.



RCA's Selectavision system uses a metal-diamond composite stylus running in modulated grooves on the disc. The stylus tip is only 5 $\mu \rm m$ by 2 $\mu \rm m$ and the groove pitch is 2.6 $\mu \rm m$. Wear is said to be its biggest problem.

The RCA system employs grooves on a 2.6 µm pitch so that a 300 mm disc rotating at 450 rpm will provide up to an hour's playing time per side. No tracking control mechanism nor a servo-controlled loop is required in this system. The main disadvantages are stylus wear, which is understood to limit the life of the capacitive pick-up to some 500 hours of playing time, and the relatively limited video and audio bandwidths. The luminance bandwidth is quoted as 3 MHz and the chrominance bandwidth as 500 kHz, while the audio bandwidth extends to 15 kHz (being encoded onto the disc with 716 kHz and 905 kHz carrier signals).

JVC system

The Video High Density (VHD) system is also a capacitive pick-up type, but does not depend on grooves in the disc for guiding the movement of the stylus across the disc. Capacitive encoded tracking information is included on the disc alongside the video programming information. The stylus does not move in a groove, but sits on the smooth surface of the disc. Minute indentations or pits provide capacitive variations to the pick-up which translates them into electrical signals. Movement of the stylus is controlled by a servo-mechanism which uses the tracking information encoded on the disc.

The VHD capacitive system provides a luminance bandwidth of about 3.1 MHz and includes a full video carrier pedestal up to 6.6 MHz. The audio bandwidth extends to 20 kHz with a signal-to-noise ratio of 60 dB.

THE DEVELOPMENT OF VIDEODISCS

Since they are only just about to be marketed, you might think that research into videodiscs has only been going for a few years. But as long ago as 1928 John Logie Baird demonstrated his "Phonovision" disc and in 1935 discs for use with the low definition Baird television system were on sale in London. They played for about six minutes per side, revolving at 78 rpm, and used a thorn needle (of a type used in some audio discs of the time) to detect a low bandwidth signal recorded in the groove modulations. They didn't catch on!

There are severe technical problems associated with the development of a high resolution videodisc system and several manufacturers have had to drastically revise their estimates of when their systems would be ready. Philips, for example, said in 1974 that they expected to be able to market their optical system later that same year.

The choice of a basic videodisc system appears to lie between mechanical, optical, capacitive and magnetic pick-up systems. Many attempts have been made to develop each of these basic techniques into a practical system.

The idea of using a mechanical pick-up was not abandoned after the failure of the earliest videodisc systems. A "Teldec" system developed by Telefunken in Germany and by Decca in England was introduced in 1970, but it was not on the market for long because of the very limited playing time of about 5 minutes per side. The disc rotated at 1500 rpm, contained one complete interlaced picture per revolution and was lifted upwards by air pressure so that it came into contact with the pick-up head. Good picture quality was obtained by the use of frequency modulation of the recorded signal.

The best known optical system is the Philips/ MCA VLP (Video Long Play) contactless technique discussed elsewhere in this article. However, other manufacturers have carried out a more limited amount of work on optical systems. In particular, Hitachi has developed a technique using a 305mm diameter disc rotating at only 6 rpm. The luminance, chrominance and sound signals are recorded on the disc in the form of 1mm diameter holograms. A small laser is used to scan the disc on replay. It remains to be seen whether any optical technique will ever be evolved which will provide both recording and replay facilities to the domestic user, but little work yet seems to have been done on this problem. Optical techniques would become much more viable if it became possible to use semi-conductor lasers.

Magnetic videodisc techniques may offer the best solution to the problem of providing recording and replay facilities to the domestic user at the present time. There are some systems using magnetic discs marketed for the professional broadcaster which re-record on a magnetic disc continuously. The maximum storage time is less than a minute, which makes them very suitable for action replays in televised sports events, but not for very much else. Great efforts have been made to develop other magnetic disc systems for the consumer market, but nothing has yet materialised. One system developed in the early 1970s using a 305 mm diameter disc gave a total playing time of nearly an hour for the two sides, but was never produced commercially.

The video signal-to-noise ratio is quoted as 42 dB.

The life of the stylus is of the order of 2000 hours (four times that of the grooved RCA system), but the servo mechanism required raises the cost of both the discs and of the equipment.




Dave Daly, Vice President of RCA, has every reason to look confident. Their Selectavision system was first on the market, and at the lowest price. But it has fewer features than the competing systems.

The discs are somewhat smaller than used in the Philips and RCA systems (260 mm dia.) and revolve at 900 rpm

This system has been developed by the Japanese Victor Company (JVC) and will be manufactured in the USA by General Electric Company and by Thorn-EMI in Europe; Matsushita of Japan is also involved. Although the first discs are being made in Japan, Thorn-EMI is trying to establish a plant in England for disc manufacture and GE are likely to manufacture discs in the USA. Players for these videodiscs can also replay suitable digital audio discs.


The VHD system provides access to any point randomly chosen on a disc more quickly than those systems in which the stylus must follow some form of groove. It can provide special effects such as a still picture, fast or slow motion replay, etc. It is rather remarkable that the discs can be manufactured using existing audio disc pressing equipment.

In the recording process for the production of the master disc, a single laser beam is split into two parts, one half



being used for recording the information and the other half being used to record the tracking signal. The master disc is made of glass coated with a photosensitive material and the recording must be carried out in a dust-free room. The laser beams are moved along a radius of the disc at constant speed, whilst the disc rotates at 900 rpm. Fine pits are thus recorded spirally on the glass disc which is then used to make a metallic master disc by the conventional process used for audio recordings.

The VHD discs sold to consumers are of conductive polyvinyl chloride (PVC) and have a life of some 10 000 playings. A sapphire stylus is employed, this stylus being mounted at the end of a cantilever arm with a magnet on the opposite end. Fixed coils are mounted near to the magnet and a single coil is wound around (but not in contact with) the magnet. In addition, a pair of vertical coils are mounted on either side of the single coil in phase opposition to one another. This arrangement enables



The VHD system from JVC employs a capacitive pickup system reading microscopic pits in the conductive plastic disc, tracking signals encoded on the disc providing information to a servo system that drives the stylus across the disc. Stylus life is said to be around four times that of the RCA system.





INTRODUCTORY OFFER

SPECIAL \$275.00 (NORMALLY \$295.00)

5 INCH 6.5MHz **OSCILLOSCOPE** G.W. — GOS-955A

SPECIFICATIONS GOS-955A

Vertical Deflection:10mV/DIV, 1/1, 1/10, 1/100, and GND,DC: DC-6.5MHz(-3dB), AC: 2Hz-6.5MHz(-3dB), 1M Ω^{\pm} 5 percent within 35PF, 600VP-P or 300V(DC plus AC peak); 250mV/DIV or better, DC-500KHz(-3dB), 1M Ω^{\pm} 10 percent within 35PF.

Time Base: 10Hz to 100KHz in 4 ranges and fine control. Less than 5 percent Internal and External.

Synchronization: Internal - & +; external; line 0-140° for line frequency sweep. INT: more than 1 DIV. EXT: more than 2V p-p

Calibration: 50mV p-p 1KHz square wave CRT Type: 130mm Round screen C.R.T. Blanking: G1

Function Generator GFG-8015 (Sine/Square/Tripli 0.2-2MHz. Triangle

pulse, ramp wave). \$185



Digital Multimeter GDM-8035 (31/2 digital AC/DC VA ohm) \$265









Audio Signal Generator GAG-808A (10Hz-1MHz) (Sine/square wave)




Digital Frequency From \$358

RADIO PARTS GROUP

562 Spencer Street, West Melbourne Phone (03) 329-7888 1105 Dandenong Road, East Malvern Phone (03) 211-8122

ELECTROCRAFT Will put you in the picture.



NEW. MH 26. 26dB GAIN VHF-UHF 750hm 40-850MHz MAST HEAD AMPLIFIER.

Fully protected against static and surges on the power line. Automatically earths to

FM. AERIALS	GAIN
FMG	1.9dB
FMG.2	7.0dB
FMG.4	8.5dB
FMG.5	8.2dB
FMG.6	8.7dB
FM.700	7.5dB
FM.3	6.0dB
FM.353	6.0dB
207/345	8 OdB

UHF & VHF Ch.O.ANTENNAS

HIIIS			
TC10/B4	Ch:28	471-605Mhz	10.6dB Gain
TC18/B4	Ch:28	471-605Mhz	13.2dB Gain
TC10/B5	Ch's 2.7.9.10	616-850Mhz	10.6dB Gain
TC18/B5	Ch's 2.7.9.10	616-850Mhz	13.2dB Gain
Channel	Master		计算机 不 是
M2	B/4 & 5	500-850MHz	9.5dB Gain
M3	B/4 & 5	500-850Mhz	10.5dB Gain
M4	B/4 & 5	500-850MHz	12.0dB Gain
4225-4 Ba	ay Bow Tie	500-850Mhz	12.0dB Gain

VHF Chs 0.2.7.9.10 ANTENNAS

All plus postage or freight.

8 element

Hills

3/5.0

113/0	10 element	High Gain
TL4/0	12 element	V/High Gain
EFC3/03	Anti-Ghost	V/High Gain
PF7/10	Anti-Ghost	City Area
Channel Mas	ster	
3110/A	Anti-Ghost	City Area
311/0	Anti-Ghost	The second state of
CX7	Good all rounder	
CX13	Anti-Ghost	High Gain
CX17	Anti-Ghost	V/High Gain
CX21	Anti-Ghost	V/High Gain
(CROWN AN	TENNA BOTATOR SOO	

High Gain

NOTICE TO INSTALLERS/WHOLE-SALERS: Save dollars on coaxial cable. Ring now for the best prices and cable in

FREE ADVICE GIVEN

68 Whiting Street, Artarmon, NSW 2064. PO Box 398. Phone (02) 438-4308 ext 6. Hours: Mon.-Fri. 8am to 5pm.

BREMI

STABILIZED POWER SUPPLIES



BRS 36 DUAL STABILIZED
POWER SUPPLY
Output voltage: 0 - ± 30VDC. Current: 0 - 5A. Dimensions: 360x145x430mm. Weight:



BRS 41 STABILIZED POWER

SUPPLY
Output voltage: 0 - 30VDC. Current: 0 - 5A.
Dimensions: 144x145x310mm. Weight:



BRS 38 STABILIZED POWER

SUPPLY
Output voltage: 0 - 30VDC. Current: 0 - 10A.
Dimensions: 322x335x148mm. Weight:




BRI 8200 DIGITAL FREQUENCY METER

Frequency range: 1 Hz - 220 MHz. Display: 7 digit ½" Led. Gate Time: 1 sec. VHF input: 10mV RMS from 1 to 100MHz — 15mV RMS from 100 to 150 MHz. - 20mV RMS from 150 to 200 MHz - 30 mV RMS from 200 to 220

ELECTROMARK PTY. LTD.

40 Barry Avenue, Mortdale, NSW. 2223.

Phone (02) 533-4896.

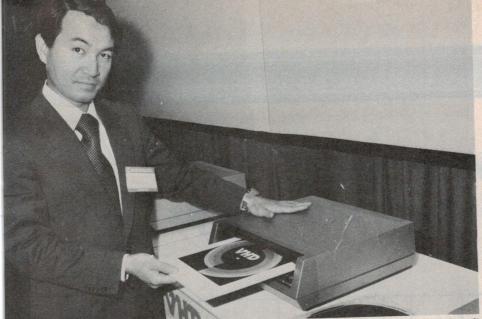

A Matsushita executive demonstrates the VHD system at last year's Consumer Electronics Show. It takes a vinyl disc that must be loaded with a caddie like the RCA system, but it has stereo (an add-on) and offers random access, freeze-frame etc.

longitudinally as the current flowing in the coils varies. The coil currents are controlled by the tracking error signals and timebase error signals. However, a command to move the stylus to a particular track can also be used to control the coil current.

JVC claim that their use of a relatively conventional disc' production technique is a great advantage of their system over optically based videodisc systems.

Thorn's recent acquisition of the EMI group of companies opens up an enormous source of film and record material for this Japanese-UK-US group to use in video and digital audio discs encoded in the JVC standard. The availability of suitable software (video and audio material) will play a vital part in the success or failure of videodisc systems.

Matsushita (who market Technics and Panasonic products) have decided to abandon their own videodisc system in favour of the JVC system and have now made an agreement with JVC. The original Matsushita system employed a direct contact stylus and a rigid disc.

Conclusions

It seems probable that the three incompatible videodisc systems will exist side by side at least in the early 1980s, so this could mean that people who want to be able to play any videodisc will be involved in expensive investments.

In spite of the current interest in videodiscs, one must remember that people will not want to replay their favourite videodisc as often as they play their favourite audio discs and this may well affect the chances of videodiscs attaining the widespread use essential for their success. However, if a wide range of material is available on disc at per Mbyte. Drexler state that this may

the stylus to be moved transversely and reasonable prices, it seems certain that there is a pretty good market for high quality systems.

The picture quality provided by videodiscs is certainly superior to that from domestic video cassette recorders. The most expensive videodisc system (Philips) will be cheaper than videotape systems (apart from its better quality pictures) and will be one of the most flexible disc systems. The JVC system offers the highest storage density of any of the videodisc systems.

It is interesting to note that videodiscs are no longer limited to the domestic consumer market. Videodiscs are very suitable for the storage of computer type information and it could well be that this application will help enormously to spur on manufacturers to invest more heavily in videodiscs generally, since there is also an enormous potential market in the business and other data storage computer fields. When compared with conventional magnetic recording techniques for digital data storage, videodiscs offer greater bit densities (with storage capacities of around 1010 bits per disc surface), virtually error-free recording, probably lower cost per stored bit and a true archival storage capability in which the recorded data is unalterable.

One of the most interesting developments from the business world came in news released from Drexler Technology (one of the leading companies in Silicon Valley) in May 1980 about a 300 mm disc system intended for use as a computer memory device which can easily be recorded upon as well as played back. Drexler claims that by early 1982 twosided discs produced in quantities of 100 000 or more will be able to store 2500 Mbytes at a cost of about two cents

be compared with current costs of 40 cents for tape cartridges or about \$3 for magnetic discs and several hundred dollars for magnetic bubble memories. Drexler also claims that 20 000 document copies could be stored on a disc at a cost of 1/4 cent per copy for use in an electronic filing system! This type of disc, known as the Drexon D-1201, is the first of its kind to become commercially available and will sell for \$3500 per disc in quantities of 20.

Also announced in May 1980 was an between Xerox agreement Thomson CSF for the development of optical disc systems for data processing.

Other companies, including Philips and IBM, are also entering the videodisc business field. It seems certain that activity in this field will sooner or later be a helpful stimulus to the consumer field. Indeed, it may well be that the days of the conventional floppy disc are numbered and that the consumer and business videodisc markets will be able to teach the computer world a thing or two!

· COMMERCIAL APPLICATIONS -

Pioneer Electronics Australia is to provide GMH with its laser technology videodisc system for use as a communications medium for GMH dealers. This makes Australia the first country outside North America to adopt videodisc technology in a commercial application on any large scale.

The videodisc will replace 'live' training and promotional services and obviate the need for dealers to attend regional and national conferences and seminars; all new product information and sales and promotional instruction will be distributable on videodisc

The GMH Video Centre, as the system is called, consists of a Discovision 7820 industrial laser videodisc player (produced by Universal Pioneer Corporation), a TV monitor and optional Pioneer sound system. Features of the 7820 videodisc are fast visual scanning in both forward and rewind modes, single frame display and chapter search.


The software for the GMH Video Centre is made to master-tape stage in Australia by AAV and then sent to Discovision Associates in the US, where the image is transferred to disc.

General Motors in the USA and Canada have already used the laser videodisc throughout their domestic dealer network, and GMH will be able to use any relevant North American material as well as their own Australia-oriented videodiscs.

The complete Video Centre sells to GMH dealers for under \$4000, and orders are currently being taken from dealers for installation in May this year.

Pioneer regard this new commercial application of the laser communications medium, which they claim to be "the most advanced method of communication ever" as a highly important step in the progress of the laser videodisc system.

Simple LED VU meter covers 20 dB range in six steps

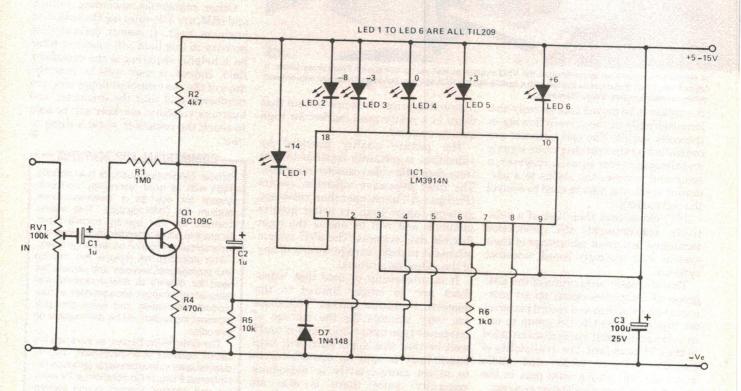

THIS VERY SIMPLE peak reading VU meter circuit uses six LEDs to indicate six signal levels. Indicators are provided at -14, -8, -3, 0, +3, and +6 dB or any other levels having the same spacing (e.g. -17, -11, -6, -3, 0, and +3 dB, if preferred). Only about 24 mV peak-to-peak is needed in order to activate the highest LED indicator, and so the circuit is sufficiently sensitive to be used with any normal item of audio equipment.

The circuit is based on an LM3914N bargraph display driver device (IC1), which can be used to drive up to ten LEDs. This is connected so that with 0.12 V at the input only the first output is activated (goes low). With the input raised to 0.24 V the second output is activated as well, 0.36 V activates three outputs and so on up to an input of 1.2 V or more whereupon all ten outputs are activated. In this circuit only LEDs 1, 2,

3, 5, 7, and 10 are included in the display, and these are LED1 to LED6 respectively.

The input signal is taken to a variable attenuator (R1), which enables the sensitivity of the circuit to be set at the correct level. The signal is then passed to a low gain common emitter amplifier based on Q1 which gives a tenfold boost in the sensitivity of the circuit, and ensures that it is adequate in this respect for all normal requirements. C2 couples the output from Q1 to the input of IC1. R5 is the input bias resistor for IC1, and D7 protects IC1 against an excess negative input voltage. Of course, IC1 only responds to the positive half cycles at its input, and this gives generally satisfactory results in practice. R6 sets the current fed to each LED at about 12 mA, but as the circuit only responds to positive input half cycles the LEDs can switch on for a

maximum of about 50% of the time. This gives an effective LED current of about 6 mA. The quiescent current consumption of the unit is about 8 mA, rising to an absolute maximum of about 44 mA with all six LEDs activated.

To calibrate the unit a 0 dB test signal should be fed into the monitored equipment, and R1 is then adjusted for the lowest sensitivity that does not cause the 0 dB LED to extinguish. The input impedance of the unit is about 80k and it will only lightly load the monitored equipment if the source impedance is 10k or lower.

SHORT CIRCUITS is a feature that lies somewhere between Ideas for Experimenters and complete Projects. Generally, the items published in Short Circuits will involve tried circuits that have not necessarily been fully developed, but fairly complete details are included as a guide to readers. Unfortunately, owing to the nature of these items, we cannot give further details other than what is provided in the article. Contributions for Short Circuits are always welcome.



Starmaker new light heavyweights are around 28% lighter than similar stage microphones. Yet they offer everything you've come to expect from Shureconsistently high performance, tailored frequency response, ruggedness and reliability. And they're available with or without cable.

The Starmaker SM78 is "first choice" for rock, pop, R & B, country, gospel and jazz vocalists. Available in colour choice of black or tan.

The SM77 is especially effective on instrumental pick-up where brilliant and defined sound is demanded. Available in colour choice of black or tan.

CHECK THESE GREAT FEATURES

Lightweight, tough . . . aluminium alloy case, 28% lighter, rugged as ever.

Enhanced intelligibility and sound . . . tailored frequency response, upper and mid-range presence

Durable, good looking finish . . . exclusive SUEDECOAT™ finish—tough, non-reflective, rust and

Custom designed carrying case . . . cushions and protects against vibration or shock. Included at no extra cost.

For technical service and advice, contact the Audio Engineers representative at the office in your State:-

AUDIO ENGINEERS PTY. LTD. AUDIO ENGINEERS (Vic.) 342 Kent Street, SYDNEY, N.S.W. 2000.

2A Hill Street, THORNBURY, Vic. 3071.

ATHOL M. HILL P/L Unit 5/66 Wellington Street, PERTH. W.A. 6000.

Frequency Response: 50-15,000 Hz. Polar Pattern: Cardioid (undirectional), rotationally, symmetric about axis, uniform with frequency. Impedance: Microphone rating impedance is 150 ohms (180 ohms actual) for connection to microphone inputs rated at 19 to 300 ohms.



send this coupon to: AUDIO ENGINEERS, 342 Kent Str SYDNEY, N.S.W. 2000. Tel. 29 6	
Please send me your 'free' brochu "StarMaker" series. (PLEASE PRINT) Name	re on Shure
Name:	
Address:	
Postcode:	ETI58I

AUDIO ENGINEERS P/L (Qld.) 1 A Castlemaine Street MILTON, Qld. 4064.

NOMIS ELECTRONICS P/L 689 South Road, BLACK FOREST, S.A. 5035.

HAWKINS AE162



Dick Smith's P-360 turntable

For a reasonably priced turntable, Louis Challis found Dick Smith's P-360 model to be good value for money, needing only a high-quality cartridge for top performance.


THE P-360 is a neat turntable providing many popular features, such as direct drive in preference to belt or rim drive and most particularly an auto return function. The direct drive incorporates a Matsushita Electric DCL-15U1 motor system; this large-selling motor is often chosen by manufacturers when they do not wish to develop and manufacture their own.

This motor and drive are rigidly screwed to a particle board and ply-fabricated plinth, which is well finished in a metallic lacquer to give the appearance of a metallic or plastic moulding. The unit also incorporates a removable single-piece acrylic moulded cover with spring-loaded hinges which slip into sockets at the back of the plinth.

Louis A Challis

Features

The number of controls provided for the turntable are minimal, the left hand side of the deck featuring two knurled speed controls for 33½ and 45 rpm, adjacent to which is a pedestal incorporating a strobe light approximately 20 mm from the edge of the platter rim. The rim incorporates four separate

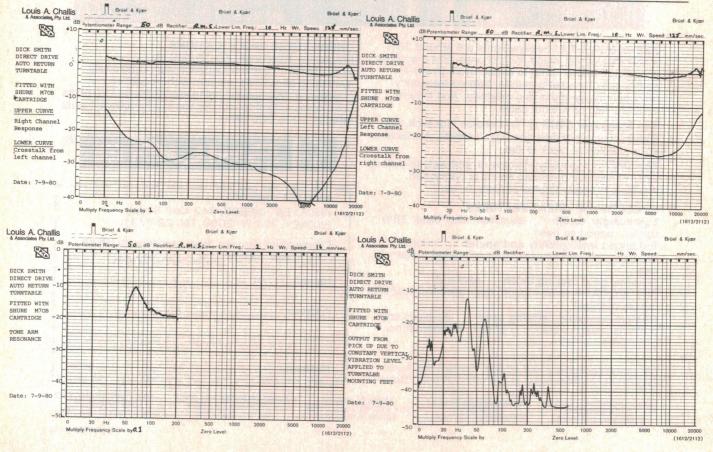



strobes for 33½ and 45 rpm and for 50 Hz and 60 Hz respectively. This of course blows Dick's statement that "this unit has been designed for Australia", but did anyone really believe that

anyway?
On the right side of the plinth are two buttons, the one on the left providing for selection of 45 and 33½ rpm whilst the one on the right is a cut control to terminate the playing of a record before the end of the selection. Behind the speed selection and cut control is a strange knob incorporating an extended aluminium arm, whose function is to initiate the play sequence. Immediately behind this is the tone arm rest and the S-shaped tone arm, integrally mounted in its own black escutcheon. The escutcheon provides an oil-damped tone arm

lift control, spring-activated anti-skate control setting and a well-designed and reasonably light tone arm assembly, complete with balance weight designed to provide up to 3 grams of static balance.

The turntable platter is a solid die casting from aluminium alloy, which weights 1.45 kg. This is surmounted by a rubber mat to give a small degree of additional damping. The plinth is supported by four rubber and plastic mounts to supply a small degree of vibration isolation to compensate for only 2 mm static deflection. Under the platter is a lever provided with seven slots to allow for variations in the speed of the tone arm movement when cueing onto or returning from the record. This is one function which is not

normally user-selectable and does add a degree of flexibility.

The head shell on the tone arm features an EIA plug-in connector and the unit tested had a universal head shell already fitted, in this case with a Shure M70-B cartridge.

On test

The objective testing of the basic turntable and tone arm showed it to have performance characteristics which ranged between good and excellent. The wow is 0.1% peak to peak, the flutter 0.04% weighted rms and .08% unweighted, whilst the rumble is -65 dB weighted — which is bordering on excellent.

The cartridge fitted has a frequency

We didn't get the lion's share of the capacitor market by pussyfooting around.

EX STOCK ALL STATES

We got it by holding inventories of components running into millions of dollars and having stock available on tap in every State. — We wouldn't attempt to supply the nation with minimal stock from one central store.

We got it by setting the highest standards in quality and reliability. Our original RB's, RT's and 'Greencaps' are now the industry standard against which other capacitors are

BUYING OFFICES
We got it by establishing buying offices in the heart of the offshore manufacturing areas to ensure low costs and continuity of supply. We have offices in Tokyo and Hong Kong and are the sole agents for Elna, Samhwa, Nissei and Taiyo, the acknowledged world leaders in capacitor production capacitor production.

AUSTRALIAN OWNED

We are a stable Australian owned Company
with the background and people to know and
understand our customers' requirements.

Soanar Electronics Pty Ltd A member of the A & R Soanar Electronics Group 30 Lexton Road, Box Hill, Vic., 3128. Australia

VICTORIA: 89 0661 QUEENSLAND: 52 1131 N.S.W. 789 6733

WEST. AUST. 381 9522 STH. AUST: 51 6981 TASMANIA: 31 6533


DATA AVAILABLE



ELECTRONIC TECHNICIANS

We require the services of several electronic technicians to work in our Service Department at North Ryde. The work involves repair of an enormous variety of electronic equipment in our air conditioned workshops. Applicants should ideally possess the E&C certificate, have had several years experience in the industry and be able to work without supervision. Salary negotiable and generous staff benefits apply. If you think that you're the person that we need, please apply in writing to:

Gary Crapp Service Manager DICK SMITH ELECTRONICS P.O. Box 321, North Ryde N.S.W. 2113.

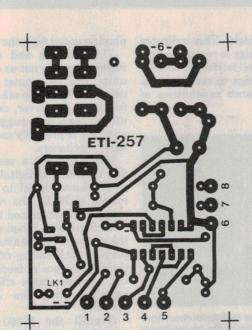


Artwork for the pc board for the ETI-257 Universal Relay Driver Board (see pages 53-55).

The NEW HEWLETT-PACKARD HP 41C V

with 2000 plus PROGRAM LINES \$412 (\$370)

SYSTEM 1 HP41C V and card reader \$630 (\$565)

SYSTEM 2 HP41C V, card reader and printer \$1066 (\$958)



HP41C (1600 steps)
HP41C Calculator
HP34C Calculator
HP34C Calculator
HP33C Calculator
HP32E Calculator
HP32E Solculator
HP32E Solculator
HP32E Solculator
HP32E Solculator
HP32E Solculator

HP's POST FREE Send SAE for complete

HP price list.
(Prices in brackets exclude sales tax.)

FINAL WEEKS

To install your **COMPUTER** for the new financial year, and receive your investment allowance this year — we are geared to do it.

We specialise in comprehensive proven packages on INTERTEC, SORD and DIABLO SYSTEMS for

WHOLESALERS

MANUFACTURERS

RETAILERS

GENERAL BUSINESS

WORD PROCESSING

REAL ESTATE

JOB COSTING



DIABLO 3000

SPARE PARTS
BUS OPERATORS

PRINTERS
MOTOR DEALERS

GLASS CUTTING

TEXTILE INDUSTRY

FURNITURE MANUFACTURERS

NOW IS THE TIME TO BUY YOUR TI59

NEW LOW PRICE!

TEXAS TI59

Only \$285 (\$255) PC100C PRINTER \$245 (\$219)

> PACKAGE DEAL Ti59 and PC100C

\$510 (\$454) POST FREE — MAY/JUNE

NON-PROGRAMMABLE
POCKET L.C.D.
WITH EVERYTHING
CASIO fx8100

46 scientific functions.
Plus clock, alarm, 2 count-down alarms, auto calendar, 1/100 sec. stopwatch, hourly time signal. \$45 (\$39.90) P&P \$1.00

(Prices in brackets exclude sales tax.)





3 ROWLEY STREET, SEVEN HILLS, NSW 2147. PHONE 8.30 am to 3.30 pm (02) 624-8400 or 624-8849

Solution review


response extending from 20 Hz to 20 kHz ±2 dB for the left channel and 20 Hz to 18 kHz ±2 dB for the right channel. Channel separation is better in the right channel than in the left, this being a function of the anti-skating control as much as of the cartridge itself. The tone arm resonance exhibits a fairly sharp "Q" at 6.5 Hz and thus falls below the preferred 9-10 Hz frequency I would recommend to minimise rumble components generated by warped records, although it is still below the expected range of recorded content.

The degree of vibration isolation is not as good as I would like, with a significant resonance at 40 Hz and a second resonance occurring at 62 Hz.

With resonant frequencies of this order there would be a reasonably strong likelihood of the unit being affected by either building vibration or acoustical feedback from the loud-speakers under adverse conditions. The unit would need to be carefully located in order to preclude this possibility and Dick Smith would be well advised to arrange for future units in which the rubber mounts provide a greater static deflection. Another alternative would be to provide supplementary isolation mounts, but this of course adds additional unwanted expense.

The harmonic distortion of the M70-B cartridge with which the unit tested was fitted was significantly higher than normal, with distortions as high as 2% on the left channel at 100 Hz, 3.6% on the right channel at 1 kHz and 11% on the left channel at 6.3 kHz. Whilst the cartridge tracks to the second highest level of the Shure TTR-103 test record reasonably well, at the 30 cm/s velocity

it completely mistracks. This indicates that a better cartridge is really needed, and one would be well advised to select a high quality cartridge in keeping with the basic performance capabilities of the record player.



Measured performance of Dick Smith direct drive auto return turntable showing the trackability on the Shure TTR-103 test record.

In use

In practical use at home with a range of alternative cartridges, including a Shure V-15 Mark III, a Shure M-95ED, an Ortofon VMS20E Mark II, and an Audio Technica AT-30E, the record player provided excellent performance in which it only slightly modified the basic capabilities of the cartridges with which it was used. The 6.5 Hz resonance did not appear to be a problem, except with warped records, and the wow, which is a little higher than desirable, also does not constitute a serious problem.

The speed adjustment capability provides sufficient range to suit those special occasions when users would desire to either increase or decrease the playing speed from the normal speed.

The starting and stopping of the record player is not as quiet as in many units, and in a quiet room positively detracted from the otherwise good performance. However, on the whole the unit appears to be ruggedly constructed and this is probably more important to most purchasers.

When playing a series of direct-to-disc records and digital records, most of which have signal to noise ratios in excess of 70 dB, the rumble and wow and flutter generated by the turntable were inaudible. When mounted close to the speakers or when resting on a record playing rack sitting on a wooden floor there is a trace of feedback, indicating the need for more effective vibration isolation than the current system provides.

Overall the P-360 record player provides good performance at a reasonable price, and only lacks the addition of a first-class cartridge in order to develop its full potential.

DICK SMITH P-360 TURNTABLE

Dimensions: 443 mm wide x 346 mm deep x 145 mm high

Weight: 7 kg Manufactured in: Taiwan


Price: \$199
Distributed by: Dick Smith stores

Absolute copyright in this review and accompanying measurements is owned by Electronics Today International. Under no circumstances may any review or part thereof be reprinted or incorporated in any reprint or used in any advertising or promotion without the express written agreement of the Managing Editor.

DICK SMITH	MEASURED PERFORM	RETURN TURNTABLE	CROSSTALK		1	tender von	enillae elektri Legi et bine
FITTED WI	- 3078 - MODEL P-360 TH SHURE M70B CAR	TRIDGE AS SUPPLIED			100Hz	lkH	6.3kH
WOW AND FLUTTER	April Manager		Left into Right Right into Left		29dB 20dB	32dB 21dB	37dВ 23dВ
Wow Flutter		1.0% peak to peak 0.04% weighted RmS 0.8% unweighted RmS	TONE ARM RESONANCE	(see attac	hed graph)		
			TOTAL HARMONIC DISTORTION	, occ artac	irea grapiny		
RUMBLE		-65dB weighted (BS4852) -38dB unweighted	(2.24cm/sec @ lkHz)		100Hz	lkHz	6.3kHz
SENSITIVITY	Right Channel Left Channel	1.9mV/cm/sec 1.5mV/cm/sec		Left Right	1.9%	2.6% 3.6%	9.8% 11%
	Channel difference	2dB	TRACKABILITY	Tracks a	ll levels ex	cept 30cm/s	ec at 2.5
FREQUENCY RESPONSES		20Hz-20kHz	(Using Shure Disc T+R103 400 and 4000Hz)	grams. Photo sh	ows distort	ion compone	

THE HITACHI OSCILLOSCOPES






V550 50 MHz

\$1,795


Professional quality oscilloscope with many unique usable features: 50 MHz Dual Trace, Third Trace Trigger View, 1 mV/Div. Sensitivity, Delayed Sweep, X10 Sweep Magnification. Equivalent Oscilloscopes cost 100s of dollars more. Supplied under contract to the A.B.C.



V302 30 MHz

\$955

Dual Trace 30 MHz 1 mV Sensitivity per division. Built in delay line plus many other features. Ideal for general purpose, transceiver and TV service, and digital use. The only 30 MHz 1 mV oscilloscope available for less than \$1,000. In use by the CSIRO.



V152 15 MHz

\$572

Dual Trace 15 MHz, 1 mV Sensitivity, XY operation, TV sync separator circuit. Sweep times magnifier (10 times) Trace rotation Z Axio Input. Excellent value for money. Supplied to many Government Departments and National TV Service Companies.



Hitachi new generation oscilloscopes are unequalled for reliability, operating ease, technical features and value for money. You can confidently buy HITACHI Test Instruments for year after year of trouble-free use.

Prices + S/Tax 15%. Subject to change. FOT Sydney.

HITACHI AVAILABLE FROM:-

N.S.W. Radio Dispatch Service, David Reid Electronics, Standard Components, Emtronics. D.G.E. Systems Newcastle.

Vic. Ellistronics, G.B. Telespares, David Reid Electronics, ECQ Electronics, J. H. Magrath & Co. Pty. Ltd.

Qld. Audiotronics, ECQ Electronics, St. Lucia Electronics.

S.A. Bee Jay Electronics. W.A. Reserve Electronics.

Tas. George Harvey Electric Launceston and Hobart

Standard Components

Pty. Ltd. "STOCKISTS IN ALL STATES"

10 Hill St., Leichhardt N.S.W. 660-6066



MAIL ORDER TO AUSTRALIA

32 Lloyd Avenue, Cremorne, Sydney 2090. (02) 908-2235. Tlx AA20149.

BUSINESS HOURS: Our office is open between 9 and 5 week-days and also 7 to 10pm Monday through Thursday so that our Australia wide clients can use STD when it's cheap (after 9pm save 60 percent on your call).

SERVICE: We provide full service, equal to any in the business, on all our lines. We support fully the manufacturer's warranty and provide complete after warranty service.

PAYMENTS: 1. Personal cheque — allow time to clear.
2. Bank cheque, postal/money order or cash.

A recepit will be issued immediately for all monies received. If you desire the protection of a written contract between us we can issue you with a Proforma Invoice.

PLEDGE: If your order cannot be supplied ex-stock a despatch date will be specified on the invoice/receipt. Failure to despatch by this date will require us to immediately and automatically issue a full refund unless instructed otherwise by the customer.

APPLE DISCOUNTED AND NOW . . . FREIGHT CHARGES SLASHED

We can ship door-to-door anywhere in Australia for:

\$15 each

Computers, disk drives, pascal, graphics tablets — everything except big printers and colour monitors (which cost more) and peripheral cards (costing less — \$4.00 by certified mail). And this includes full insurance.

THIS MONTH'S SPECIAL

(Order this month. Deliver next) DISK DRIVE WITHOUT CONTROLLER \$470 Tax Free. \$540 Tax Paid.

Our free software and hardware catalogue has our complete range and prices, all of which are substantially discounted.

16k Apple II plus, \$1403. Disk & Controller, \$725. 16k Apple II plus & 32k, \$1541. Green Screen Monitor, \$342.

For tax free prices divide by 1.15. (Prices subject to change and exclude delivery)

Our range includes all Apple products and those of CCS and Mountain Computing.

good and top quality monitors

 printers, Trendcom, Microline 80, Epson MX80 Paper Tiger, Anadex and Sanders

• the best in business, gaming and educational software

card reader

WINDWAY:

Where readers can advertise — For Sale/Wanted/Swap/Join.

 We'll publish up to 24 words (maximum) totally free of charge for you, your club or your association. Copy must be with us by the 1st of the month preceding the month of issue. Please - please - print or type adverts clearly, otherwise it may not turn out as you intended! Every effort will be made to publish all adverts received however, no responsibility for so doing is accepted or implied. Private adverts only will be accepted. We reserve the right to refuse adverts considered unsuitable

· Conditions: Name and address plus phone number (if required) must be included within the 24 words. Reasonable abbreviations, such as 25 W RMS or 240 Vac, count as one word. Adverts must relate to electronics, audio, communications, computing etcgeneral adverts cannot be accepted. Send your advert to:

ETI Mini-Mart, Modern Magazines 15 Boundary St. Rushcutters Bay NSW 2011

AUDIO

GRAPHIC EQUALISER, new, 10 knobs each channel, \$169. Amplifier, 40 W/rms each channel, new, \$179. Phone Paul (02)30-1839.

FOR SALE: Brand new ETI Series 3000 compact 20W amplifier \$90. G. Rim, 20 Cheverton Rd, Lower Plenty Vic. (03)439-9138.

QUAD electrostatic treble panels, improved, \$100 each. B&W electrostatic panels for DM 70 speakers, as new with guarantee, half price, \$150 each. Phone Otto (02)29-6197.

FOR SALE: JVC add-on rear amp, 100 W, built-in 5-band equal. Remote volume control also. As new \$100. Phone Pat (02)259-5080 a.h.

SPEAKERS: JBL pro monitors, best JBLs in Australia. Replacement value of \$5000 - stunning performance. Must sell, \$3750 - Melbourne (03)99-1047.

WANTED: Members to enjoy sound magazines, printed magazines, round robins, tapespondence. Full details: The Tape Club of Australia, P.O. Box 118, Wellington NSW 2820.

COMMUNICATIONS

WANTED: COLLINS R391 (or R390) com. recvr. top and bottom cover plates, modules, tools, valves. D. Bruce (03)93-1638, 3 Shadwell St, Cheltenham Vic 3192.

MISCELLANEOUS

DATA PRECISION MOD. 935 DMM portable, LCD. 0.1% accuracy. New — in original packing, and all accessories. \$120 ono. Phone (07)286-2665.

KLEEN BOND 48-inch pan-brake sheet metal bender. Designed for all those sheet metal tasks, electronic chassis or box trailers, \$950. 487-2972.

FREE COMPUTER DATING — the ultimate in compatibility. All ages. Absolutely free. Send large self addressed envelope to 24a Simpson St, Bondi NSW 2026.

FREE Friden Flexowriter (110 Vac) with tape reader and punch. Old home-made audio CRO \$20. EA 110 SW receiver \$40. Phone (02)456-1958.

WANTED: Service manual for a Siemens 100, mk1, 3-row telex machine. Will pay up to \$10. Phone Frank, 318-4297 or 67-1707, any time.

SELL: Electronic parts, capacitors, diodes, ICs, POTs, switches, transistors, trimpot and many more, all separate prices. M. Sully, 61 Newman St, Niddrie Vic. 3042.

SELL: TI-30 scientific calculator, as-new condition. Features logarithms, trigonometry, hyperbolic functions, exponential 8-digit display, memory. \$18. Anthony Preston, RMB-29, Jeparit Vic. 3423. Phone (ah) (05)391-8232.

SELL: 240 Vac to 9 Vac/dc transformer. Rated at 900 mA. Ideal for TI-30 or other calculator. \$9. A. Preston, RMB-29, Jeparit Vic. 3423. Phone (ah) (05)391-8232.

SELL: Electronics Australia. May '77 to date. 80 cents apiece + 30 cents p&p. A. Preston, RMB-29, Jeparit Vic. 3423. Phone (ah) (05)391-8232.

WANTED: Circuit diagram/manual for Telequipment D31.R dual beam CRO. Will pay photocopying costs. L. Reynolds, 221 Eastern Rd, Wahroonga 2076. Phone (02)487-3912.

SELL: DFM 40 MHz E.A. design, Dick Smith kit. Fully assembled, perfect working order with gold socket for prescaler. Cost \$99.50, sell \$65. Phone (02)524-4780

COMPUTERS

WANTED: Cromemco System 3, complete or in parts, and/or Persci 277 disk drive. Phone Mark (03)870-4017 (ah).

FOR SALE: ZX80 with power pack, memory expansion board, memory chips and ZX80 companion book. Very little use. \$250. Phone (02)597-1239 ah.

OSI C4P/C8P programs. Four original programs including a great low res. graphics utility \$10. Peter Bessell, P.O. Box 1220, Southport 4215.

SOFTWARE for TRS-80 and other Z-80 systems. Editors, assemblers, word processor, games etc. Write for list. P.O. Box 545, Toowong, Qld 4066. Phone (07) 371-4477.

WANTED: Documentation, circuit diagram for DGZ80 kit from Applied Technology. Info required on 74S200 (or replacement) and 82S123 (programmed) chips. Pay \$5 for photocopy. Jim Buchanan, 14 Nolan Way, Bateman, WA 6155. Phone (09) 332-4713.

TELETYPE MOD 15 governed 110 V motors, \$7.50 ea. Oiled paper tape, 70¢ per 8" roll. 46 Gloucester St (Nth), Sydney, NSW 2000. Phone 27-2982 a.h.

SELL: VIDEO PLUS VDU for Aim/Sym/Kim computers. Complete with 8K RAM, ASCII keyboard, 2K EPROM and full documentation — \$260 o.n.o.. lan Hoskin, 38 Errington St, Plympton, SA 5038. Phone (08) 293-6305.

DG640 VDU board, complete, \$75 o.n.o. KT9500 kit, complete, \$55 o.n.o. John Petersson, 15 Robinson St, O'Connor, ACT 2601. Phone 72-3730

SELL: One ASR-33 teletype, \$570 o.n.o. One Teletype 28D printer with 2650 interface, \$120. Padstow NSW, (02) 239-0311 ext 5557.

SELECTRIC PRINTER, heavy duty, tractor feed wide paper. Interface and Z80 driver software. Plus 3 spare machines for parts. \$350. Alan Peek, (02) 89-1450.

SORCERER computer, 48K, VDU, cassette, games and general ledger program to suit small business, cost \$2350, sell for \$1500, as new. Stanley Falinski, (02) 451-9443.

PROGRAMS for unexpanded Sinclair ZX-80, 3 for \$2, complete listings and notes. Elkhorne, 15 Myella Dr, Chigwell, Tas 7011.

WANTED: TINY BASIC (2-3K) for 2650 minicomputer. Would pay for cassette or listing. Phone (02) 389-1418, Paul. 1/149 Victoria Rd, Bellevue Hill, NSW 2023.

ETI-641 S100 PRINTER — EUY 10E023LE printer mechanism, 21/2 rolls of paper, S100 logic board, fully assembled (with character generating ROM), sample printout, good condition, \$125. John Francis (02) 649-9155.

FRIDEN FLEXOWRITER computer I/O, upper case only, fitted with ASCII paper tape punch reader, \$300. R. Long, 46 Gloucester St, Sydney (02) 27-2982 a.h.

DREAM 6800 OWNERS, I would like to share. Please send SSAE for some useful routines. Frank Rees, 27 King St, Boort, Vic 3537.

SELL: Synertek SYM-1 with cables, \$175. Contact Simon Wardrop, 3 Gwenda Ave, Blackburn, Vic 3130. (03) 878-0469.

COPYRIGHT: The contents of Electronics Today International and associated publications is fully protected by the Commonwealth


COPYRIGHT: The contents of Electronics Today International and associated publications is fully protected by the Commonwealth Copyright Act (1968).

Copyright extends to all written material, photographs, drawings, circuit diagrams and printed circuit boards. Although any form of reproduction is a breach of copyright, we are not concerned about individuals constructing projects for their own private use, nor by pop groups (for example) constructing one or more items for use in connection with their performances.

Commercial organisations should note that no project or part project described in Electronics Today International or associated publications may be offered for sale, or sold, in substantially or fully assembled form, unless a licence has been specifically obtained so to do from the publishers, Modern Magazines (Holdings) Ltd or from the copyright holders.

LIABILITY: Comments and test results on equipment reviewed refer to the particular item submitted for review and may not necessarily pertain to other units of the same make or model number. Whilst every effort has been made to ensure that all constructional projects referred to in this edition will operate as indicated efficiently and properly and that all necessary components constructional projects referred to in this equion will operate as indicated efficiently and properly and that all necessary components to manufacture the same will be available no responsibility whatsoever is accepted in respect of the failure for any reason at all of the project to operate effectively or at all whether due to any fault in design or otherwise and no responsibility is accepted for the failure to obtain any components parts in respect of any such project. Further, no responsibility is accepted in respect of any injury or damage caused by any fault in the design of any such project as aforesaid. The Publisher accepts no responsibility for unsolicited manuscripts,



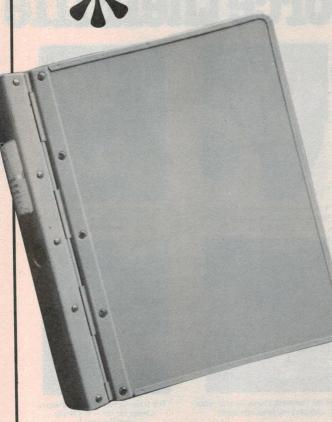

HERE IS A MOST UNUSUAL SPECIAL OFFER.

Our company has for sale 1500 of the most superbly made binders you've ever seen in your life!

We bought them for a data service which has since closed down. They are specifically intended to hold data sheets and similar material which must be referred to constantly. All those for sale are brand spanking new — but we can show you some old ones that have been in constant hourly use for over 20 years and they are still as new!

We know this sounds like hyperbole, but these devices can only be described by using superlatives. They're made (like a Rolls-Royce!) by the Swedish company Aggripa.

For example, the hinge assemblies are made of heavy-gauge plated steel. The spine and all outer edges of the covers are heavy-gauge enamelled steel. Apart from the steel hinges holding the covers, the spine itself is hinged down the centre, enabling the binder to lie completely flat for easy insertion and removal of material.

As may be seen from the pix, material is held in place by an eight-hole pin mechanism — actuated by a remote control trigger at the bottom of the spine.

These binders are ideal for housing valued reference material, data sheets, etc. etc.

These binders are not normally obtainable in small numbers
— if they were the retail price would be at least \$25 each.

We are offering them exclusively to ETI readers for the absolute bargain price of \$10 each (plus \$2.00 post and packing). See also inset table for quantity prices.

These binders may be inspected at our Sydney and Melbourne offices during normal working hours.

UNCONDITIONAL MONEY-BACK GUARANTEE.

ETI guarantees to return the purchase price in full and without query to any reader/s not totally satisfied with their purchase, providing the goods are undamaged and returned within seven days of receipt.

		AND REPORT OF THE PARTY OF THE
		(QTY) OF BINDERS.
Name		
Address		
Selection T		Postcode
order to BIND	out cheques to ETI a ER OFFER, Electro St, Rushcutters Bay N	and forward together with nics Today International, ISW 2011.
PRICES		
1 - 5 6 - 24 25 plus	\$10 each \$9.00 each \$8.00 each	plus \$2.00 each p & p. free free

Join the people who have made the AirForce their life



"I've seen a lot of Australia. Now I'm looking forward to being posted



"I enjoy being a member of the team that keeps our F111's fully operational."



You're trained to work on some of the most advanced equipment in the world."



"The opportunities for promotion with more pay and responsibility are there."



"You don't mind working hard if it's for a specific purpose like the



"At 23 I found myself promoted to Section Head. That kept me on my toes."



"It isn't all work I have time to relax and play my favourite sport."



"The training has set me up with a career for life — it's really professional."

The satisfaction and rewards are immense.

A new lifestyle. New friends. New interests. New qualifications. New places visited.

And you start on full adult pay too! After training well pay you even more! Then there's four weeks annual leave and the opportunity to continue studying for higher qualifications. So if you want to reach a higher rank, it's up to you.

It's not an easy life.

Success demands application. A disciplined approach to your work. What's more, you'll be part of a special team that's proud to wear the Air Force uniform.

Normally you'll work a five day week. But at times we expect you to do extra duties.

You must be prepared to join us for a minimum of six years and be prepared to live and work on any one of our bases.

Your future.

Is it in Flight Systems, Propulsion Systems, Air Frames, Telecommunications, Engineering, Administration, Weaponry, Supply or Motor Transport? The choice is vast. The scope unrivalled.

So if you're aged between 17 and 34 years (17 and 43 years if no trade training is required), an Australian citizen or meet our nationality requirements, we would like to meet you. (People with civilian qualifications and

experience are most welcome to apply.) Enquiries are also invited for Apprenticeships.

Today, walk into the Air Force Recruiting Office nearest you and have a chat with a Careers Adviser. The address is in the phone book. It could be your first important step to an exciting new career.

Alternatively send the coupon or phone for the facts:

Brisbane: Townsville: 226 2626 71 3191 Wollongong: Parramatta: 28 6294 635 1511 Hobart: Adelaide: 34 7077 212 1455 Melbourne: Newcastle:

RAAF CAREERS
ADVISER. G.P.O. Box XYZ
in the capital city nearest you
Yes! I am interested in an RAAF
career. Please send me full details.

Name

Mr/Miss

Address

State

Postcode

Date of Birth:..../

DO 417 FD 11

You're somebody in Today's Air Force

Authorised by Director-General Recruiting Dept. Defence



Electronics Today International is published by Modern Magazines (Holdings) Ltd, 15 Boundary St, Rushcutters Bay NSW 2011. It is printed (in 1981) by Offset Alpine, cnr. Wetherill and Derby Sts, Silverwater NSW, and distributed by Gordon and Gotch.

Editor Roger Harrison VK2ZTB Technical Editor David Tilbrook VK2YMI **Production Editor** Jane Clarke B.A. (Hons) **Editorial Staff** William Fisher B.Sc. (Hons) J.B. Scott B.Sc./B.E. (Hons) VK2YBN **Graeme Teesdale** Jan Vernon B.A. **Phil Wait VK2DKN** Art Direction and Technical Photography Ivy Hansen Layout Bill Crump Reader Services Jan Collins Managing Editor Collyn Rivers

Mail enquiries: There is no charge for replies, but a foolscap-sized, stamped, addressed envelope must be enclosed. Queries relating to projects can only be answered if related to the item as published. We cannot advise on modifications to projects, other than errata or addenda, nor if a project has been modified or if components are other than specified. We try to answer letters as soon as possible. Difficult questions may take time to answer.

Phone enquiries: We can only answer readers' technical enquiries by telephone after 4.30 pm. In enquiring by telephone about back issues or photostats, please ask for the Subscriptions Department.

(02)33-4282

Editorial and Sales Office: 4th Floor, 15 Boundary St, Rushcutters Bay NSW 2011. Ph. 33-4282; Tlx: 27243

Sales Manager: Bob Taylor Sales Admin: Jan Collins (address as above)

Melbourne: Virginia Salmon, 150 Lonsdale St, Melbourne Vic 3000. Ph: 662-1222; Tlx AA34543.

Adelaide: Admedia Group, 24 Kensington Rd, Rose Park SA 5067. Ph: 332-8144; Tlx AA82182.

Brisbane: Geoff Horne Agencies, 16 Bellbowrie Centre, Bellbowrie Qld 4070. Ph: 202-6813.

Perth: Aubrey Barker, 133 St Georges Terrace, Perth WA 6000. Ph: 322-3184; Tlx: AA93810

New Zealand: Geoff Collins, P.O. Box 39163, Auckland NZ. Ph: (9)760-150.

United Kingdom: Australian Consolidated Press, Ludgate House, 107 Fleet St, London EC4A 2AL. Ph: 353-1040; Tlx: 267163.

Japan: Genzo Uchida, Bancho Media Services, 15 Sanyeicho, Shin juku-Ku, Tokyo 160. Ph: 359-8866; Cable: Elbanchorito; Tlx: BMSINC J25472 Tokyo.

USA: Peter Samuel, Australian Consolidated Press, 444 Madison Avenue, New York NY 10022. Ph; 751-3383; Tix: 620892.

0	D	-		•	0	B	A
U	n	D		1	U	Ш	ш

Acoustical Consultants

Louis Challis & Associates

Subscriptions	\$23.30 per year within Australia \$28.80 overseas (surface mail) Airmail rates on application	\$ \$	NAME (Please print)	
Back issues	\$2.50 from April 1977 on (October 19	ADDRESS		
or photocopies	\$2.50 per article per issue		·	
Project No	Month Year	\$		
	Month Year		201000000000000000000000000000000000000	
	Month Year			
Project No	Month Year	\$	***************************************	
Please attach a list if mo				
Binders	No @ \$6.10 in NSW	\$	AND THE RESIDENCE OF THE SERVICE OF	
presentation of the	No @ \$7.50 in other states	\$	POSTCODE	



A COUPLE OF MONTHS ago Dregs asked readers to send in examples of names matching occupations. We've had quite a response, including a whole list from C. Hignett of Kirwan, Qld, who acknowledges the UK Sunday Times as the publishers of the original list but thought they were worth reprinting anyway. Here goes: Messrs Doolittle and Dalley - Estate

agents.

Messrs Welsh and Robb — Solicitors

Dr Dottie — Psychiatrist

Mr Smellie — Sanitary inspector

Mr Cheater — Tax inspector

Mr Boddy — Undertaker

Mr Graves — Cemetery caretaker

Police Constable Caution

Messrs Plummer and Leek - you quessed it!

Plus a whole family called Snoring who live in the village of Gotobed.

Craig Air of Belrose, NSW, also wrote to tell us of teachers at his school whose names match their subjects: there's Mr Weldon, the metalwork teacher, Mr Levy, the commerce teacher, Mrs Tucker, who teaches cooking, and a music teacher by the name of Mrs Organ. Craig reckons it's all one of the Ministry of Education's new schemes for helping new Year 7 students find their way around the school - he could be right.

And our typesetter here at ETI tells us of her mother's chiropodist, a lady called Miss Trotter, who lives at Randwick — which of course is where the racetrack is!

Pun punts

February's puns occasioned a rush of creativity (??), or maybe that should be a rash . . . Anyhow, away we go with an entry from James Gallagher of Beecroft, in Sydney. James sent in a number of songs and question-answer from B.P. Dilworth of Curre King puns, but his best effort was a limerick: Island, off Tasmania. Apart from There was a technician called John


Who swallowed a 16K ROM

He tried on a buss

But it caused such a fuss

That his bytes performed functions all wrong!

from 15-year-old Paul Richardson of Redcliffs in Victoria. He had two question-answer puns, again on a computing theme. His best (?) was: Q: What does a shepherd have in

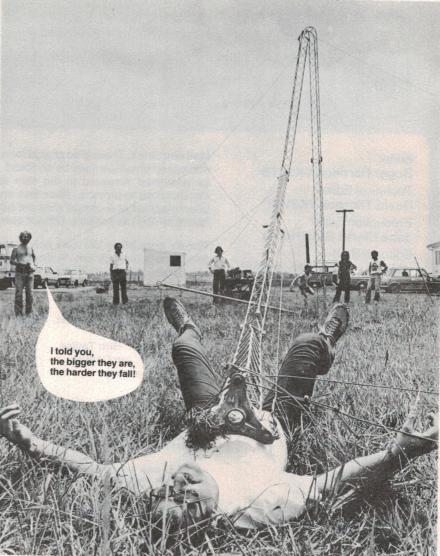

Wayne Cantell, Editor of sister journal Modern Motor, clowning around at the Fleurs antenna test range of Sydney University (at Kemp's Creek) during measurement trials of vehicle radar cross-sections for our March issue lead article on Police Radar Traps.

common with a computer? They both have rams!

Then Bert Hansen sent in one that would have the Commissioner for Community Relations, Mr Grassby, after us if we printed it. Sorry Bert. However, this month's prize pun came sending two dozen puns, Mr Dilworth sent us a dozen or so cartoons. We might get round to the cartoons some other time. His winning pun combined a literary and computing theme! If Shakespeare had discovered Boolean Hot on his heels came an entry Algebra before Boole did, perhaps Hamlet's famous soliloquy would have turned out: BB or BB!

Your copy of Computers & Computing is on its way, Mr Dilworth.

punster extraordinaire, thought up a Shakespearean pun ages ago, and your Editor has been seeking an opportunity to embarrass him with it ever since. It's not as subtle as Mr Dilworth's effort, but here it is, anyway:

Shakespeare, reflecting upon the demise of live music in Elizabethan pubs, was heard to say: 'Now is the winter of our discotheque' "!

At this stage, we should warn readers that this madness has to stop! All good things come to an end, and the Great Dregs Pun Competition will end with the July 1981 issue. After a run of 12 months, it's about time we found some other curiosity to have fun with in Dregs. Get those entries in before 15 May. Don't miss the July issue — new Our Managing Editor, Collyn Rivers, Dregs competition coming up!

UNTILWE DEVELOPED THE STEREO GROOVE, HI-FI WAS PRETTY HO-HUM!



The world of hi-fi owes a lot to the original and continuing innovation of JVC. Few companies, if any, have done as much to help turn records and record-players into the virtual musical instruments they are today ... or to lead the way in developing so many firsts in the more recent concepts of sound amplifiers, cassette decks and computer-designed speaker

systems. Hi-fi, as we know it today, had its beginnings in 1956, with JVC's development of the 45°/45° groove for stereo records. The fact that this system still remains as the world standard is, in itself, outstanding testimony to the technology of JVC. The development revolutionised not only the record-making industry, in which we've been involved since 1930; it also paved the way for enormous advancement in the design and engineering of record-playing equipment. Now, hi-fi has expanded to



R-S77. Super-A FM/AM Stereo receiver

embrace a wealth of highly-sophisticated electronic equipment; and it's not surprising that JVC has continued to play a leading role in so much of its development.



HR-3660 EA. VHS Colour Video Cassette recorder

THAT WASN'T OUR ONLY FIRST, EITHER.

We also pioneered Japan's television industry, introducing their first TV receiver just over 40 years ago. A more recent innovation is VHS, the home video recording system now gaining world-wide acceptance as the system for such equipment. In the course of staying ahead, we've introduced a number of world firsts of radical importance: the Quartz Lock turntable is one of them.

THE QUARTZ LOCK TURNTABLE. MANY TIMES MORE ACCURATE.

It stands to reason that if your equipment is at the top end of the range, then your turntable must be capable of comparable performance. Only Quartz Lock ensures this, tying the speed of the turntable to the unvarying pulse of the atom, and providing a level of accuracy far in excess of conventional turntables.



MORE MILESTONES IN HI-FI.

To match the superb quality of Quartz Lock, we produced the S.E.A. graphic equalizer system. Then we refined it to such a degree it even compensates for the effect your furniture has on sound when it leaves the speakers! To expand the capabilities of tape, we designed ANRS and



SEA-80. Stereo Graphic Equalizer

Super ANRS — automatic noise reduction systems which not only reduce distortion and 'hiss' but actually extend the dynamic range of the tape. Similarly, with speakers: at JVC we employ computers in their design to help provide the ultimate in sound reproduction.

AND NOW, SUPER-A.

In its own way, as significant a hi-fi development as the stereo groove. Imagine an amplifier which combines the best features of the two recognised amplifier classes (A and B) ... an amp which combines the efficiency of one with the low distortion of the other. Some engineers said it couldn't be done; but not those at JVC. Enter the Super-A amplifier . . the latest JVC first!

Distributed and Serviced by .. **HAGEMEYER**



THE FUTURE.

It's already with us. For instance, we were so far ahead in the new metal tape technology that our cassette decks were metal-compatible before the tapes were generally available. And now there's the JVC Electro-Dynamic Servo Tonearm, damping tonearm resonance by means of a purely electronic system and two thinking linear motors. Who was it who dubbed JVC, 'the innovators'?

the right choice

1861



The Information Computer you access on your own Television



- STOCK BROKERS—SHARE MARKET ENTHUSIASTS—Get the latest Stock Exchange and Futures market reports.
- PUNTERS—Get the latest odds on a race and the earliest actual results and dividends
- Who won the cricket, football, league, tennis—get all the important results.
- What were the lotto, lottery, pool numbers—how much did it pay? DID YOU WIN? The results are on Teletext.
- MUM—How much should you be paying for fruit and veggies, meat and poultry.
- DAD—Read the news at your leisure.
- KIDS—Enjoy mastermind, jokes, graphics and puzzles.
- What will the weather be like tomorrow in Brisbane, Sydney, Perth, New York, Athens, London—IT'S ALL ON TELETEXT.

GET ALL THIS INFORMATION and much more from the FREE electronic newspaper of the 80's—YOUR OWN television set with an ADAM 180 TELETEXT ADAPTOR by RADOFIN ELECTRONICS (AUST).

THE ADAM 180 **EXIADAPI**

RADOFIN ELECTRONICS (AUST)

5 Curlewis Street, Bondi, NSW 2026, AUSTRALIA

Telephones: (02) 309 1957 or (02) 309 1904